

**Evaluation of Environmentally Superior Technology: Swine Waste Treatment System for Elimination of Lagoons, Reduced Environmental Impact, and Improved Water Quality**

(Phase II: Centralized Composting Unit)

**FINAL REPORT**

**For the NC Attorney General – Smithfield Foods / Premium Standard Farms / Frontline Farmers Agreements**



**Prepared by  
Matias Vanotti, PI  
USDA-ARS**

**Project Title:**

**Evaluation of Environmentally Superior Technology: Swine Waste Treatment System for Elimination of Lagoons, Reduced Environmental Impact, and Improved Water Quality.  
Phase II: Composting of Separated Solids**

**Project Reference:**

**USDA Agreement 58-6657-2-202 / NCSU Subcontract #2001-0478-02  
USDA-ARS CRIS Project # 6657-13630-001-05**

**Principal Investigator, e-mail and address:**

Dr. Matias B. Vanotti  
[vanotti@florence.ars.usda.gov](mailto:vanotti@florence.ars.usda.gov)  
USDA-ARS Coastal Plains Research Center  
2611 W. Lucas St.  
Florence, SC 29501  
Telephone: 843-669-5203 x108

**Co-PI's and address:**

Drs. Patricia Millner<sup>1</sup>, Ariel Szogi<sup>2</sup>, Patrick Hunt<sup>2</sup> and Frank Humenik<sup>3</sup>  
QA Manager: Mrs. Aprel Ellison<sup>2</sup>

<sup>1</sup> USDA-ARS, Sustainable Systems Laboratory and Environmental Microbial Safety Laboratory, Beltsville, MD.

<sup>2</sup> USDA-ARS Coastal Plains Research Center, Florence, SC.

<sup>3</sup> NCSU, Waste Management Programs, Raleigh, NC.

**Duration Dates:** 10/01/2001 – 06/30/2002, extended to 1/15/2005 (Phase I and II)

**Dates Covered for Report:** 06/01/2004 – 01/15/2005

Mention of a trade name, proprietary product, or vendor does not constitute a guarantee or warranty of the product by the USDA and does not imply its approval to the exclusion of other products or vendors that also may be suitable.

## Table of Contents

<b>Project Title, Investigators, and Dates</b> .....	<b>2</b>
<b>Executive Summary</b> .....	<b>4</b>
<b>Technology Description</b> .....	<b>5</b>
<b>Technology Provider</b> .....	<b>5</b>
<b>Total System Background</b> .....	<b>5</b>
<b>Objectives</b> .....	<b>7</b>
<b>Results</b> .....	<b>8</b>
Permitting and Agreement .....	8
Construction of Solids Processing Facility (Hickory Grove) .....	8
Sample Collection, Analytical Methods, and Monitoring .....	8
Technology Verification Conditions.....	9
Timeframe.....	9
Weather .....	9
Loading Rates of Manure Solids and Nutrients.....	10
Composting Unit.....	12
Background.....	12
Performance Verification of the Composting Unit.....	14
Operation.....	14
Bulking Materials and Compost Mixes .....	15
Nutrient and Carbon Mass Balances.....	16
Compost Product Characteristics.....	18
Compost Process Temperatures.....	20
Reduction of Microbial Indicators of Fecal Contamination .....	21
Operational Problems Experienced and Solutions.....	22
Operator Training.....	22
<b>Conclusions</b> .....	<b>23</b>
<b>Acknowledgements</b> .....	<b>23</b>

## Executive Summary

Systems of treatment technologies are needed to capture nutrients, reduce emissions of ammonia and nuisance odors, kill harmful pathogens, and generate value-added products. A system of swine manure treatment technologies was developed to accomplish many of these tasks. The project was a collaborative effort involving scientists, engineers, and personnel from private businesses, university, and USDA. The project addressed one of the nation's greatest environmental problems – the cleanup and disposal of manure from swine-production wastewater. The total system was comprised of 1) on-farm wastewater treatment facilities that replace anaerobic lagoon treatment with a system that uses liquid-solid separation, nitrification/denitrification, and soluble P removal technologies, and 2) a centralized solids processing facility where separated manure is aerobically composted and transformed into value-added products including soil amendments, organic fertilizers, container substrate, and soilless media. The total system went through full-scale demonstration and verification as part of the Smithfield Foods / Premium Standard Farms / Frontline Farmers - North Carolina Attorney General Agreement to identify technologies that can replace current lagoons with Environmentally Superior Technology. Objectives were to provide critical performance evaluation of the Swine Manure Treatment System to determine if the technology meets the criteria of Environmentally Superior Technology defined in section II.C of the Agreement. Specifically, the evaluation of technical and operational feasibility and performance standards related to the elimination of discharge of animal waste into waters and the substantial elimination of nutrient and heavy metal contamination of soil and groundwater. The on-farm system was successfully demonstrated on a 4,400-head finishing farm in Duplin County, North Carolina, and included in Phase I Technology Determination Report of July 2004. In this second report, we document Phase II demonstration and performance verification of the centralized solids processing facility. The solids processing technology was developed by Super Soil Systems USA of Clinton, North Carolina. The centralized treatment plant completed design, permitting, construction, startup, and half-year operation under steady-state conditions. The full-scale composting demonstration facility was installed in Sampson County, North Carolina, and received the separated solids from the production swine facility 30 miles away. It used a mechanically agitated bed system with further stabilization in static windrows to treat a mixture of manure and cotton gin trash residues. Major goals in the demonstration and verification of the centralized solids processing facility for treatment of swine manure solids were achieved including consistent operation and production of quality composts under cold and warm weather conditions. A total of 273 tons of raw manure solids was converted into 237 tons of valuable organic materials with an earthy scent and rich texture that can be used for fertilizer manufacture, soil amendments, potting soil, and soilless media. The quality composts were produced using various mixtures that conserved 95-100% of the nitrogen and other nutrients into a stabilized product. The process showed substantial elimination of pathogen indicators meeting class A biosolids standards. Results from this project have demonstrated that manure and other agricultural wastes can be transformed into value-added products using a simple, effective technology. It was verified that the technology is technically and operationally feasible. Based on performance results obtained, the treatment system meets the criteria of Environmentally Superior Technology defined in section II.C of the Agreement on performance standards for the elimination of discharge of animal waste to surface waters and groundwater and for the substantial elimination of nutrient and heavy metal contamination of soil and groundwater.

### **Technology Description:**

#### Production Farm Treatment Facility (Phase I Evaluation) at Goshen Ridge:

Waste Stream from Barns → Homogenization Tank → Solid-Liquid Separation with Polymer

(Liquid Phase) Nitrification/Denitrification → Clean Water Storage → Recycle to Barns → Excess Treated Water to Phosphorus Removal Module (Marketable Product) → Crop Irrigation

#### Solids Processing Facility (Phase II Evaluation) at Hickory Grove:

(Solid Phase) Composting → Curing

(Cured compost product is used to produce Organic Fertilizer, Soil Amendment, and Soilless Media.)

### **Technology Provider: Super Soil Systems USA, Inc**

Mr. Lewis M. Fetterman, President and CEO

[supersoil@intrstar.net](mailto:supersoil@intrstar.net)

484 Hickory Grove Rd, Clinton, NC 28328

Telephone 910-564-5545

Super Soil Systems Project Scientist:

Dr. C. Ray Campbell, Vice President Research & Development

### **Total System Background:**

Systems of treatment technologies are needed that capture nutrients, reduce emissions of ammonia and nuisance odors, kill harmful pathogens, and generate value-added products from manure. A system of swine wastewater treatment technologies was developed to accomplish many of the tasks listed above. The total system had two main components: 1) an on-farm wastewater treatment system, and 2) a centralized solids processing facility. The total system went through full-scale demonstration and verification as part of the Smithfield Foods-Premium Standard Farms/North Carolina Attorney General agreement to identify technologies that can replace current lagoons with Environmentally Superior Technology. The demonstration project was completed in two Phases. Demonstration and verification of the wastewater treatment system project were done in Phase I, and demonstration and verification of the centralized composting facility were done in Phase II. Both projects were constructed and operated by Super Soil Systems USA of Clinton, NC.

The on-farm technology used three process units consisting of polymer enhanced solid-liquid separation, nitrification/denitrification, and soluble P removal, linked together into a practical system (Vanotti, M.B., Szogi, A.A. and Hunt, P.G. "Wastewater Treatment System" US Patent No. 6,893,567 Issued May 17, 2005). It was installed at Goshen Ridge, a 4,400-head finishing farm in Duplin County, NC (Figure 1), and evaluated intensively during a one-year period from March 1, 2003, to March 1, 2004. The facility was kept running at full-scale for an additional year to provide separated solids to the centralized composting project as well as supporting other research projects such as sub-surface irrigation and study of the cleaned lagoon.



**Figure 1: Super Soil on-farm treatment technology installed at Goshen Ridge farm in Duplin County, NC.**

The total system was completed with the centralized solid processing facility, where separated manure solids were subject to an aerobic composting process and blending to produce value-added products such as organic fertilizer, soil amendments, and soilless media for use in horticultural markets. The composting process and the blended products were developed by Super Soil Systems USA. The composting technology was installed at Hickory Grove farm in Sampson County, NC (Figure 2), and evaluated for a 6.5-month period from June 1, 2004, to January 15, 2005.



**Figure 2: Super Soil solids processing facility installed at Hickory Grove farm in Sampson County, NC.**



**Figure 3: Agronomic testing of soil substitutes made with composted swine manure at the Super Soil greenhouse facilities.**

The evaluation focused on the composting process. Blending and development of specialized commercial (proprietary) agronomic products based on quality composted manure have been extensively tested by the technology provider in greenhouses at the same facility over the last 7 years and were not subject to this evaluation (Figure 3).

### **Objectives:**

Our objective was to provide critical performance evaluation of the Swine Manure Treatment System and Solids Processing Technologies in Proposal #001 Project Award, NC Attorney General/Smithfield Foods & Premium Standard Farm Agreements, to determine if the technology meets the criteria of Environmental Superior Technology defined in section II.C of the Agreement. Specifically, the evaluation of technical and operational feasibility, and performance standards related to the elimination of discharge of animal waste to surface waters and groundwater, and the substantial elimination of nutrient and heavy metal contamination of soil and groundwater.

Demonstration of the on-farm wastewater treatment facility at Goshen Ridge farm has been completed. Corresponding performance evaluation was included in the Phase I Technology Determination Report, Development of Environmentally Superior Technologies (July 26, 2004). [http://www.cals.ncsu.edu/waste\\_mgt/smithfield\\_projects/phase1report04/phase1report.htm](http://www.cals.ncsu.edu/waste_mgt/smithfield_projects/phase1report04/phase1report.htm)

Demonstration and performance verification of the centralized solids processing component of the system are covered in this report for Phase II Technology Determination July 2005.

## **Results:**

### **1. Permitting and Agreements**

All necessary agreements and State permits for installation and operation of the composting and solids processing facility at Hickory Grove Rd. farm were completed.

### **2. Construction of the Solids Processing Facility**

Construction and installation of the solids processing facility were completed in November 2003. These included:

- Soil blending building.
- Open Shed (250 ft long x 40 ft wide), with 5 compost bins on concrete pads and loading and unloading areas.
- Automated bin composter with 7.5 HP-motor.

### **3. Sample Collection, Analytical Methods, and Monitoring**

For the separated solids, we collected one sample from each trailer that left Goshen Ridge farm. After moisture determination, solid samples from individual trailers were combined into two weekly samples for chemical analyses. For compost materials, once a month we collected duplicate samples of materials at the end of each compost bin, and after curing.

Determination of volumes of the various compost mix components were based on daily records of trailers (before 9/20/04) or number of tractor scoops loaded into each bin (after 9/21/04). For compost products, volumes were calculated using daily records of tractor scoops used to unload the compost at the end of each bin. The volume carried by a tractor scoop was determined for each material by loading two scoops, emptying them on the concrete pad, and shoveling each load into calibrated buckets. We also determined compost production using a second method for comparison with the scoop accounting method. This second method used changes in curing pile volume and weight during the evaluation accomplished by surveying these piles at various times. Results showed a 94% agreement in the dry weight produced determined using the scoop accounting method vs. the dry weight produced that was estimated using the pile surveying method.

Volume determinations were combined with corresponding bulk densities, moisture, and chemical analyses to determine loading rates and nutrient mass balances. Bulk densities of manure solids, cotton gin trash, wood chips, and compost products were determined at the site using calibrated, 5-gal. buckets and an electronic scale.

Process moisture was determined weekly by the compost-master on samples collected at 15 points throughout the length of each bin. Moisture was determined gravimetrically by drying samples to constant weight using an oven and scale station that was set up at the composting facility. We also determined moisture in all samples taken to Florence and Beltsville

laboratories and used for confirmation of the more intensive field determinations or specific reporting of pathogen results and cured compost.

Chemical analyses consisted of pH, electrical conductivity (EC), total nitrogen (TN), carbon (C), total P (TP), copper (Cu), zinc (Zn), ammonia-N (NH<sub>4</sub>-N), nitrate-N (NO<sub>3</sub>-N), and soluble P (PO<sub>4</sub>) using standard methods. Carbon and TN contents were determined using dry combustion analysis. Microelements were measured in acid digestion extracts using inductively coupled plasma (ICP) analysis. Soluble P was determined by the automated ascorbic acid method, NH<sub>4</sub>-N by the automated phenate method, and NO<sub>3</sub>-N by the automated cadmium reduction method. Total P was determined using acid block digestion and the automated ascorbic acid method adapted to digested extracts.

Temperatures of the compost process were measured daily by the operator at 15 points throughout the length of each bin using calibrated compost thermometers. Values reported at each point were the average of three thermometer readings. Temperature readings were checked against independent monthly readings done by the evaluation team at same points.

Microbiological analyses were done in the laboratory of Dr. Patricia Millner in Beltsville, MD, using the standard protocols for pathogens and indicator microbes for the examination of manure and composts.

#### **4. Technology Verification Conditions**

##### **4.1 Timeframe**

Performance verification of the compost processing unit started June 1, 2004, and ended January 15, 2005. We evaluated compost production in two bins (#1 and #2) and corresponding curing piles. Both bins received separated swine solids from Goshen Ridge farm.

Bin 1 was loaded with two types of mixtures during the length of the evaluation. A mixture 1SS:2CGT:4WC (1 volume of separated manure solids mixed with 2 volumes of cotton gin trash and 4 volumes of wood chips) was used from July 16, 2004, to October 27, 2004, and a mixture 1SS:2CGT was used from October 28, 2004, to the end of the evaluation period (January 15, 2005).

Bin 2 used a mixture 1SS:2CGT (1 volume of separated manure solids mixed with 2 volumes of cotton gin trash). Loading of bin 2 with this mixture started April 1, 2004. The compost product reached the end of the bin in about 1 month. Therefore, when verification started (June 1, 2004), the process in this bin was at steady-state.

##### **4.2 Weather**

Performance evaluation (June 2004-January 2005) included cold and warm weather conditions; average daily air temperatures ranged from 32.3 to 89.3°F (0.2 to 31.8°C) (Figure 4).

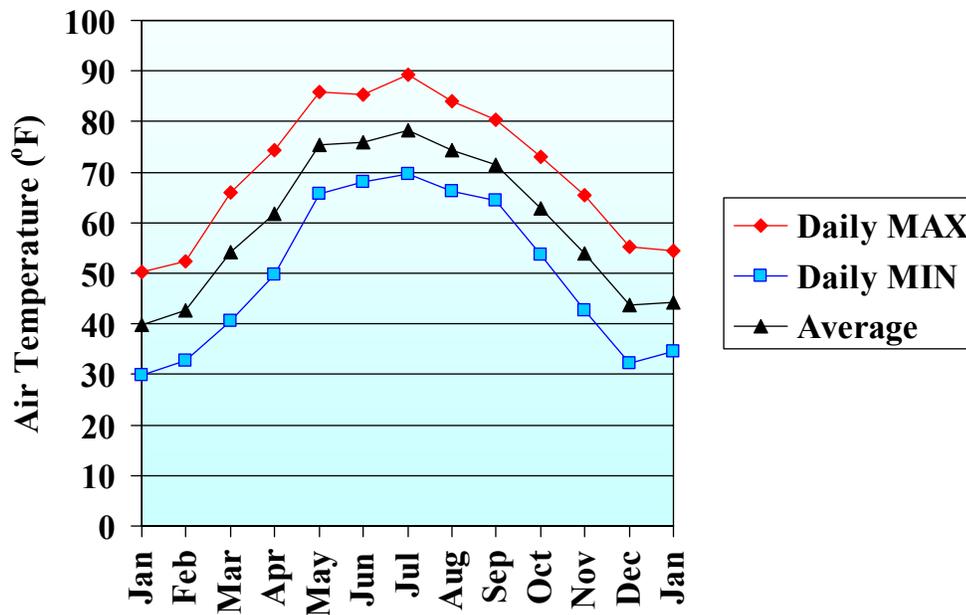


Figure 4: Air temperature during Jan 2004-Jan 2005. Data are monthly average of daily Max and Min air temperature and monthly average of 2-m average daily temperatures.

### 4.3 Loading Rates of Manure Solids and Nutrients

Monthly loading rates of swine manure solids, nutrients (N and P) and metals (Zn and Cu) into the composting unit are shown in Table 1. Data comprise separated solids generated from the on-farm wastewater treatment system at Goshen Ridge farm in Duplin County (Phase I report) that were transported in trailers daily to the centralized solids processing unit in Sampson County about 30 miles away (Figure 5). A total of 297 m<sup>3</sup> of manure weighing 248 metric tons and containing 16.7% solids was processed in the composting facility from June 1, 2004, to January 15, 2005, to produce stabilized, value-added compost materials. The separated manure contained 5.3% total nitrogen, 4.0% phosphorus, 0.32% copper, 0.30% zinc (values on dry weight basis, Table 2) that are equivalent to 2.2 metric tons of nitrogen, 1.7 metric tons of phosphorus, 125 kg of copper, and 125 kg of zinc.



Figure 5: Separated solids from the on-farm wastewater treatment system at Goshen Ridge farm.

**Table 1: Monthly manure loadings into the compost operation (Bins 1 and 2) during the evaluation period June 2004-Jan 2005. Separated solids from Goshen Ridge farm, Unit 1 (Barns 1 to 6) were transported daily to the centralized composting facility. Moisture content (%) = 100 – solids (%). January data are for the first 15 days. Bin 1 was loaded with two types of mixtures: A mixture 1SS:2CGT:4WC (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips) was used from July 16, 2004, to October 27, 2004, and a mixture 1SS:2CGT was used from October 28, 2004, to the end of evaluation (January 15, 2005). Bin 2 used a mixture 1SS:2CGT throughout the evaluation. Table shows only manure components (SS).**

Manure Loading	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Total (average)
Manure Volume (m <sup>3</sup> )	35.7	45.0	42.5	17.5	41.8	47.6	30.3	36.1	296.5
Manure Weight (x 1000 kg)	29.3	37.5	34.9	14.8	35.9	39.6	25.1	30.3	247.5
Solids (%)	17.3	16.8	17.2	16.3	15.8	16.8	17.0	16.5	(16.7)
Manure Total N (kg)	251	324	334	139	322	371	223	234	2198
Manure Total P (kg)	234	293	281	104	219	250	144	149	1674
Manure Zinc (kg)	14.2	20.8	19.8	7.7	15.9	18.6	13.0	15.0	125.1
Manure Copper (kg)	15.7	20.2	19.2	7.9	18.7	22.0	14.5	16.5	134.1
% load into Bin 1	0	15.1	40.0	37.0	33.0	53.2	57.0	50.0	(35.7)
% load into Bin 2	100	84.9	60.0	63.0	67.0	46.8	43.0	50.0	(64.3)

**Table 2: Composition of manure solids from liquid-solid separation treatment (Goshen Ridge farm) used in the composting process at the Hickory Grove facility. Concentration values are on a dry weight basis. Total nitrogen measurement includes ammonia-N. Data are means for the period June 1, 2004-January 15, 2005.**

Element	Average Concentration %	Monthly Min-Max Concentration %
Total Nitrogen	5.32	4.68-5.75
Ammonia Nitrogen	0.34	0.27-0.38
Total Phosphorus	4.03	2.98-4.68
Copper	0.32	0.31-0.33
Zinc	0.30	0.28-0.33
Total Carbon	38.16	33.52-43.04
Potassium	0.54	0.46-0.61
Calcium	2.31	1.89-2.68
Magnesium	2.09	1.96-2.24
Sulfur	1.25	1.19-1.32

## 5. Composting Unit

### 5.1 Background

Composting is a natural decomposition process that stabilizes manure organic matter and reduces odors and pathogens. This is a rapid, self-heating aerobic process carried out by bacteria and fungi, which digest the wastes and reduce it to a stable humus. It has developed in recent years into a robust waste-management technology that generates valuable organic soil amendments. The Super Soil compost design is an agitated bed aerated system operated inside a pole-barn-type structure that protects the compost from rainfall. Solids are mixed with amendments and bulking agents and mechanically agitated and aerated, with subsequent curing in static windrows retained for at least 30 days.

The process was performed in three contiguous areas:

- 1) A concrete pad at the front of the process that received the manure solids arriving daily in trailers from Goshen Ridge farm. The same area was used to put the bulking materials (cotton gin trash and wood chips) used in the compost mixtures. A front-end loader was used to carry manure and bulking material loads to the composting bins immediately after trailer arrival.
- 2) Composting bins (or channels) that were 192 ft (58.5 m) long, 77.5 inches wide, and 36.5 inches deep, where the compost mixtures were mechanically agitated to enhance the thermophilic phase. There were five bins installed at the composting facility, all under one common roof; only bins 1 and 2 were evaluated in this project (using swine solids produced at Goshen Ridge Unit 1). A mechanical mixer that served all bins moved about daily through each of the bins, agitating the compost, and at the same time advancing the material from one end to the other (Figures 6 and 7).
- 3) Curing static windrows that were the final stage in the composting process. Two curing windrows were assessed; they received compost material from bins 1 and 2 (Figure 8).



**Figure 6: Front of compost bin #2 showing railing system and dock (foreground) used to move the mechanical mixer along the bin and across bins.**



**Figure 7: Composts at the end of the bins. Bin #1 (left) used a mixture 1SS:2CGT:4WC, and bin #2 (right) used a mixture 1SS:2CGT (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips).**



**Figure 8: Curing static windrows used to complete the composting process. Dark compost (right) used a mixture 1SS:2CGT and lighter compost used 1SS:2CGT:4WC (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips).**

## 5.2 Performance Verification of the Composting Unit

### *Operation*

Data in Table 3 show operational conditions of the compost process. Every time the machinery agitated the mixture, it also advanced the material. It took about 30 passes to move the compost from one end of the channel to the other end. The machinery was typically operated 5 to 6 times per week, which resulted in a typical retention time in the channels of about 40 days. The exception was during September 2004 and January 2005. In September 2004, lower amounts of manure available for composting, associated with low pig weight at Goshen Ridge farm, resulted in decreased loading rate and mixing intensity in the composting operation. The opposite occurred in January 2005; mixing frequency was increased to about seven days a week to process higher daily loads associated with market-size pigs at the production farm.

Once the compost mixture reached the end of the channel or bin, it was carried into subsequent curing in static windrows (no turning) for further stabilization. There it was retained for at least 30 more days. The compost was considered mature after this curing stage.

**Table 3: Operational conditions of compost process: Average daily loading, average mixing times per week, retention times, and moving speed. Volume load is a mixture of swine manure and bulking agents. The machinery has two functions: one is to turn the compost, the second is to move the compost thru the bin. It takes about 30 passes of the mixing machinery to advance the compost mixture from one end of the bin to the other (192 ft or 58.5 m). July data for Bin 1 are for 16 days. January data for both bins are for the first 15 days.**

Manure Loading	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Average
<b>Bin #1</b>									
Volume load (m <sup>3</sup> /d)	--	2.98	3.84	1.74	4.14	3.38	2.23	4.81	3.30
Number of turns per week	--	5.7	4.7	2.6	5.9	5.6	5.6	7.0	5.3
Retention time (days)	--	36.9	44.3	81.8	35.8	37.5	37.2	30.0	43.4
Moving velocity (m/day)	--	1.58	1.32	0.72	1.64	1.56	1.57	1.95	1.48
<b>Bin #2</b>									
Volume load (m <sup>3</sup> /d)	3.57	3.70	2.47	1.24	3.62	2.97	1.68	4.81	3.01
Number of turns per week	4.4	4.5	5.9	3.3	6.3	4.4	5.0	6.5	5.0
Retention time (days)	47.4	46.5	35.8	64.3	33.2	47.4	42.3	32.1	43.6
Moving velocity (m/day)	1.24	1.26	1.64	0.91	1.76	1.24	1.38	1.82	1.41

### *Bulking Materials and C/N ratios*

Separated raw manure contained a high moisture content (83.3%), high bulk density (0.84 kg/L), and low C/N ratio (7.2); conditions that are not good for optimal aerobic composting conditions. To improve these conditions and optimize the composting process, bulking agents and amendments were used. Their addition reduced bulk density and moisture content and increased porosity and the C/N ratio, all of which are critical for production of quality composts. Amendments included cotton gin trash residue (Figure 9), an abundant waste in the region, and wood chips (Table 4). Solids processed in Bin 1 used a mixture of 1SS:2CGT:4WC (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips) from July 16, 2004, to October 27, 2004, and a mixture 1SS:2CGT from October 28, 2004, to the end of evaluation (January 15, 2005). Solids processed in Bin 2 used a mixture 1SS:2CGT throughout the evaluation.


**Table 4: Composition of bulking agents used in the compost mixtures with swine manure. Elemental concentration values are on a dry weight basis.**

Characteristics of Bulking Agent	Cotton Gin Trash (CGT)	Wood Chips (WC)
Density (kg/L)	0.092	0.455
Moisture (%)	12.7	66.1
Total Nitrogen (%)	1.02	0.67
Total Phosphorus (%)	0.18	0.30
Copper (%)	0.0039	0.0087
Zinc (%)	0.0070	0.0147
Total Carbon (%)	42.88	42.13



**Figure 9: Cotton gin trash used in the compost mixtures.**

Data in Figure 10 show the C/N ratio of the different mixtures (Bin IN) compared with C/N ratio of the untreated raw manure solids. The data also show changes in the C/N ratio after going through composting (Bin OUT).

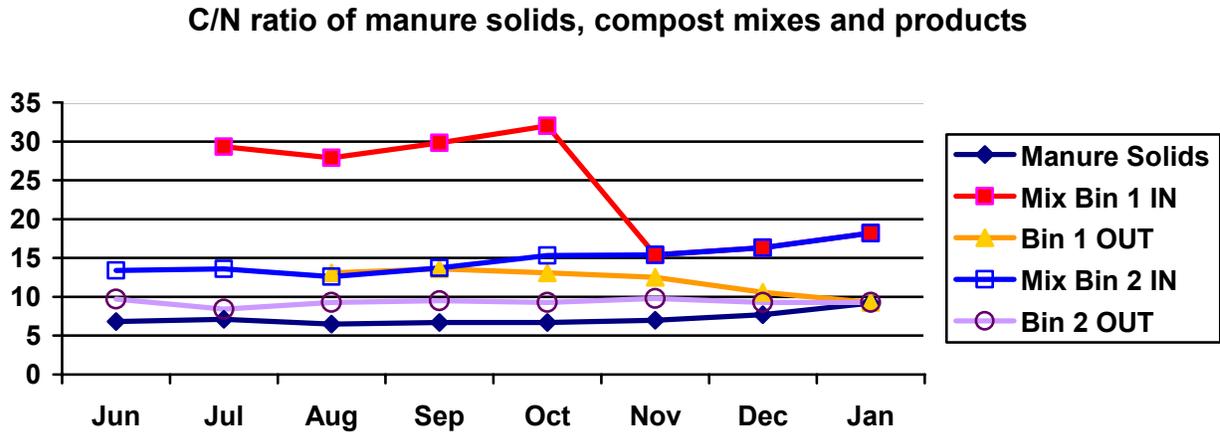

**Figure 10:** C/N ratio of the separated manure solids used in the compost operation, the mixtures after addition of bulking agents, and the compost products. Bin 1 was loaded with two types of mixtures: A mixture 1SS:2CGT:4WC (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips) was used July-October, and a mixture 1SS:2CGT was used November-January. Bin 2 used a mixture 1SS:2CGT throughout the evaluation.

### *Nutrient and Carbon Mass Balances*

Data in Table 5 show mass balance calculations of the mixture materials before and after compost processing. Values in Table 5 are presented separately for compost 1, compost 2, and all composts. Results obtained with both mixes were consistent. The process significantly reduced total volume, weight, and carbon. On the average, final volume was reduced to about 29% of the initial volume, while total weight and carbon were reduced to about 56% of the initial amounts. This was expected because carbon sustains the biological activity in the compost and is lost through microbial respiration. For nutrients, we conducted mass balances for N, P, Zn, and Cu. Phosphorus, Zn, and Cu are considered conservative elements in the sense that they will not volatilize and can be used as a reference in mass balance studies to assess gaseous losses of non-conservative elements, such as N (ammonia) and carbon (CO<sub>2</sub>). Our results showed that nearly all (95 to 99%) of the N was accounted for in the compost product and that very little of the N (<3.5%) was lost through ammonia volatilization or denitrification. Thus, most of the N was incorporated into stabilized forms. This conclusion is supported by quantitative recovery (~100%) obtained with the conservative elements.

**Table 5: Mass balance of compost materials during composting process including total carbon, total nitrogen, total phosphorus, and heavy metals. Bin 1 was loaded with two types of mixtures: A mixture 1SS:2CGT:4WC (SS=separated manure solids, CGT=cotton gin trash, and WC=wood chips) was used from July 16, 2004, to October 27, 2004, and a mixture 1SS:2CGT was used from October 28, 2004, to the end of evaluation (January 15, 2005). Mass balance data for bin 1 include totals for the period August 1, 2004 to January 15, 2005. Bin 2 used a mixture 1SS:2CGT that was started in April, 2004; mass balance data for bin 2 include totals for the period June 1, 2004 to January 15, 2005.**

Mass Balance	Mixture of swine manure and bulking agents	Compost product	Recovery (%)
<b>1. Compost processed in BIN 1</b>			
Material Weight (x 1000 kg)	184.8	102.2	55.3
Material Volume (m <sup>3</sup> )	542.3	176.1	32.5
Total Carbon (kg)	25,908	13,601	52.5
Total Nitrogen (kg)	1134	1125	99.2
Total Phosphorus (kg)	631	630	99.8
Total Zinc (kg)	46.3	44.9	97.0
Total Copper (kg)	47.8	43.6	91.1
<b>2. Compost processed in BIN 2</b>			
Material Weight (x 1000 kg)	203.2	113.2	55.7
Material Volume (m <sup>3</sup> )	661.2	166.0	25.1
Total Carbon (kg)	26,190	15,884	60.6
Total Nitrogen (kg)	1800	1707	94.8
Total Phosphorus (kg)	1185	1207	101.9
Total Zinc (kg)	83.6	84.5	101.0
Total Copper (kg)	87.8	86.0	97.9
<b>3. All Composts (1 + 2)</b>			
Material Weight (x 1000 kg)	388.0	215.4	55.5
Material Volume (m <sup>3</sup> )	1204	342.1	28.4
Total Carbon (kg)	52,098	29,485	56.6
Total Nitrogen (kg)	2934	2832	96.5
Total Phosphorus (kg)	1816	1837	101.2
Total Zinc (kg)	129.9	129.4	99.6
Total Copper (kg)	135.6	129.6	95.6

*Compost Product Characteristics*

Characteristics of the cured composts are shown in Table 6. Two composts were produced: A Supersoil compost that used mix formulation 1 (1SS:2CGT:4WC), which is used for soil amendment and as the main ingredient in the manufacturing of potting soil, soil-less media, and container substrate; and a Supersoil compost produced with mix 2 (1SS:2CGT), which is used for fertilizer manufacturing and is being tested for use as a general soil amendment.

Nutrient grades of the curing product (as sampled on a wet basis) were 1.1N:1.6 P<sub>2</sub>O<sub>5</sub>:0.6K<sub>2</sub>O and 1.5N:3.1P<sub>2</sub>O<sub>5</sub>:1.1K<sub>2</sub>O for compost mix #1 and #2, respectively. Corresponding dry weight nutrient grades were 2.0:2.9:1.1 and 3.2:6.8:2.4, respectively. One of the benefits of the compost over raw manure is that it provides slow-releasing nutrients for plant uptake. For example, most of the nitrogen (96.5%) was stabilized and only 3.5% was present in soluble ammonia and nitrate forms (Table 6).

**Table 6: Characteristics of compost products after 30 d curing. Mix 1 contained separated manure solids, cotton gin trash and wood chips processed in Bin 1 during July-October 2004. Mix 2 contained separated manure solids and cotton gin trash processed in Bin 2 during July 2004-January 2005. Percent elemental composition values are on a dry weight basis; to convert to wet weight basis, multiply by [(100-% moisture)/100]**

Compost Characteristics	Compost Produced Using Mix 1 (1SS:2CGT:4WC)	Compost Produced Using Mix 2 (1SS:2CGT)
Moisture (%)	44.6	54.7
Bulk Density (kg/L)	0.47-0.52	0.68-0.72
Total Carbon (%)	28.6	28.8
Total Nitrogen (%)	2.01	3.22
Ammonia-N (%)	0.05	0.11
Nitrate-N (%)	0.019	0.003
Total Phosphorus (%)	1.25	2.96
Soluble Phosphorus (%)	0.33	0.60
Potassium (%)	0.90	2.01
Calcium (%)	1.21	2.77
Magnesium (%)	0.54	1.41
Zinc (%)	0.0746	0.1708
Copper (%)	0.0677	0.1650
Sulfur (%)	0.48	0.96
pH	6.50	6.71
Electrical Conductivity (mS/cm)	7.60	10.10

Our frequent examinations of these compost materials sampled either at the end of the bin (Figure 11) or in the curing pile (Figure 12) indicated that these materials had an agreeable, earthy scent and rich texture with little or no resemblance, other than the brown color, to the original raw manure used in the mixtures. These materials did not attract flies.



**Figure 11. Compost reaching the end of the bin.**



**Figure 12. Static curing piles used to complete the composting process.**

### Compost Process Temperatures

Aerobic decomposition, the main process responsible for composting, is an exothermic process that releases a large amount of heat. Heat is generated by microbes that digest organic matter. An internal temperature in the range of 130 to 150°F is evidence that the compost is working well and that the environment is suitable. These high temperatures are produced by the biological activity of thermophilic microorganisms that decompose and stabilize organic matter. Then, as the microbes gradually deplete the food sources, their metabolic activity declines and so does the temperature of the mix. In addition to speeding up the decomposition process, the heat produced also helps in killing pathogenic microorganisms. Process temperatures obtained during the demonstration period were consistent in the two bins (Figure 10). Average temperatures quickly increased to > 130°F during the first 10 meters, peaked throughout the following 15 to 20 meters, and decreased at a steady rate while the mixture moved toward the end of the bin (Figure 10). Compost moved at an average velocity of 1.41 to 1.48 m/day (Table 3); therefore, these high temperatures were sustained for an average of about 10 to 15 days. Compost process temperatures obtained during cold weather conditions were higher compared to values obtained during warm weather conditions. For example, average peak process temperatures obtained at 15-25 m distance were 131°F during the warmer months (June, July and August), and 145°F during the coldest months (November, December, and January). These conditions overall resulted in good pathogen killing and quality grade composts as shown in the following section.

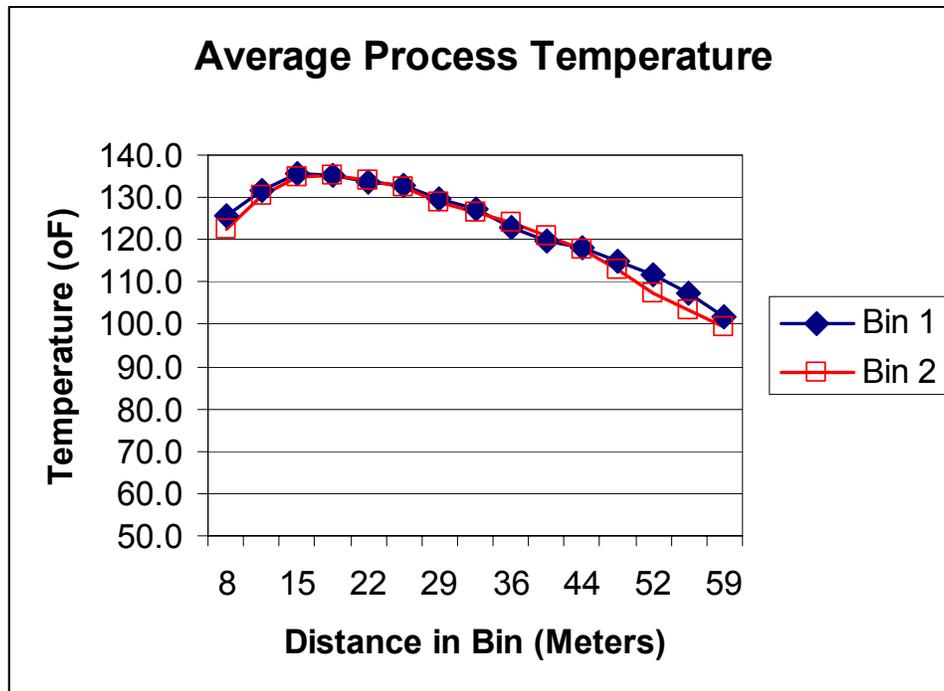


Figure 10: Compost process temperatures (°F) along the bins from start (0 m) to end (58 m). Data are averages of daily temperature records taken during evaluation period (Bin 1: July 16, 2004-Jan 15, 2005; Bin 2: June 1, 2004-Jan 15, 2005). Temperature measurements were taken between 7am and 9:30am. Compost moved at an average velocity of 1.41 to 1.48 m/day (Table 3).

### *Reduction of Total Fecal Coliforms*

We measured total heterotrophs and total fecal coliforms at various points in the process including untreated separated manure. Total heterotrophs are indicators of microbial activity in the composting process and include beneficial microorganisms. On the other hand, total fecal coliforms are pathogen indicators of fecal contamination that are also used to establish compost grade or class. The USEPA has developed a classification system for treated waste, including treated manure. Class A Biosolids compost must have a fecal coliform density of less than 1000 Most Probable Number (MPN)/gram of total solids on a dry weight basis (Code of Federal Regulations, 2004, 40 CFR Part 503.32). Composts meeting the Class A Biosolids standards may be used by the general public, by nurseries, gardens, and golf courses. This standard is also required for biosolids to be sold in a container, or to be applied to home gardens and lawns.

Solids composting with cotton gin trash and wood chips in the channel mechanically agitated, aerated system showed substantial reduction in pathogen indicators during the thermophilic phases, with further stabilization dependent on subsequent curing in static windrows retained for at least 30 days (Table 7). Reduction in fecal coliform at the end of thermophilic phase (after approximately 43 days RT in the agitated channel) was not sufficient to meet the strict Class A requirements, but subsequent curing stage (30 d) produced a quality compost that met the USEPA Class A pathogen requirement in fecal coliform standard (Table 7).

**Table 7: Microbiological analyses of separated swine manure solids and compost samples. Percent moisture was determined for each sample and cfu/g was adjusted to reflect the dry weights of the samples. Values are means of duplicate samples. BDL (below detectable limit of the test) indicates there were no positive colonies to be counted on spiral-plated samples (<1.00E+00); MPN series were performed in order to quantify the counts (values in parenthesis). Mix 1 was 1SS:2CGT:4WC; mix 2 was 1SS:2CGT.**

Sampling date and location	Total Heterotrophs cfu/g dry	Total Fecal Coliforms cfu/g dry (MPN/g)	Log 10 Reduction of Total Fecal Coliforms	Meet Class A Biosolids
<b>Sampling date 7/29/04</b>				
Separated manure solids	5.77 x 10 <sup>8</sup>	7.02 x 10 <sup>5</sup>	--	no
Cured compost mix 2 (30 days)	2.07 x 10 <sup>7</sup>	BDL	5.85	yes
<b>Sampling date 9/1/04</b>				
Separated manure solids	2.32 x 10 <sup>9</sup>	6.46 x 10 <sup>5</sup>	--	no
End of bin compost mix 1	1.47 x 10 <sup>7</sup>	9.62 x 10 <sup>1</sup>	3.83	yes
End of bin compost mix 2	1.59 x 10 <sup>7</sup>	1.33 x 10 <sup>3</sup>	2.69	no
Cured compost mix 2 (35 days)	1.86 x 10 <sup>7</sup>	BDL (3.50 x 10 <sup>1</sup> )	4.27	yes
Cured compost mix 2 (86 days)	1.76 x 10 <sup>7</sup>	BDL (1.33 x 10 <sup>1</sup> )	4.69	yes

<b>Sampling date 11/1/04</b>				
Separated manure solids	8.03 x 10 <sup>8</sup>	2.97 x 10 <sup>5</sup>	--	no
End of bin compost mix 1	1.11 x 10 <sup>9</sup>	4.68 x 10 <sup>3</sup>	1.80	no
Cured compost mix 1 (12 days)	7.77 x 10 <sup>6</sup>	1.35 x 10 <sup>3</sup>	2.34	no
Cured compost mix 1 (35 days)	4.21 x 10 <sup>8</sup>	BDL (<3.0 x 10 <sup>0</sup> )	5.47	yes
End of bin compost mix 2	2.25 x 10 <sup>9</sup>	1.48 x 10 <sup>3</sup>	2.30	no
Cured compost mix 2 (17 days)	4.75 x 10 <sup>7</sup>	8.76 x 10 <sup>2</sup>	2.53	yes
Cured compost mix 2 (33 days)	3.44 x 10 <sup>8</sup>	5.37 x 10 <sup>2</sup>	2.74	yes

## 6. Operational Problems Experienced and Solutions

### *Compost Equipment*

The technology provider had problems during start-up (December 2003-January 2004) with the newly installed mixing machinery; basically, the machinery was too slow. The problem was fixed by company personnel that changed valves and various electrical components for the machinery to work at the proper design speed.

### *Mixture Formula Selection*

A mixture of 1SS:1CGT was tried in Bin 1 during early 2004 based on good composting performance obtained in preliminary small batch scale testing, but it was discontinued after full-scale initial testing because moisture was too high and its consistency was not satisfactory. The mixture formula was modified to improve physical characteristics and composting conditions and used during technology verification.

### *Very Old Cotton Gin Trash*

A very old cotton gin trash material (> 2 years), that was kept outdoors for this project, was first used in the demonstration. The compost-master was more pleased with the use of fresher cotton gin trash (< 1 year old) in terms of porosity of the compost mixture. Use of fresh cotton gin trash was implemented October 13, 2004, which was immediately reflected in the higher process temperatures obtained.

## 7. Operator Training

The compost processing unit requires one operator with a high-school education and mechanical skills. The operator needs to receive short-term (1-week) training by the company that includes information on compost equipment, operation and maintenance, safety and health aspects, reporting of temperature and moisture conditions, and mechanical troubleshooting. A trained operator can safely operate a composting operation receiving solids from three farms, each farm providing treatment to about 4,500 pigs.

In addition to the plant operator, successful operation of the technology also requires support from a compost-master with knowledge in the composting process and soil fertility to provide technical advice with the compost process, blending, and product formulations. This person can provide support to one or various centralized plants serving about 100 farms.

### **Conclusions:**

Major goals in the demonstration and verification of a centralized solids processing facility for treatment of swine manure solids were achieved including consistent operation and production of quality composts under cold and warm weather conditions. The quality composts were produced using various mixtures that conserved much of the nitrogen and other nutrients into a stabilized product that can be used for fertilizer manufacture, soil amendments, potting soil, and soilless media. Results from this project have demonstrated that manure and other agricultural wastes can be transformed into value-added products using simple, effective technology. Results obtained have also advanced the state of the science in animal waste treatment.

The centralized treatment plant completed design, permitting, construction, startup, and half-year operation under steady-state conditions. It was verified at full-scale that the technology is technically and operationally feasible. Based on performance results obtained, the treatment system meets the criteria of Environmentally Superior Technology defined in section II.C of the Agreement on performance standards for the elimination of discharge of animal waste to surface waters and groundwater and for the substantial elimination of nutrient and heavy metal contamination of soil and groundwater.

### **Acknowledgements:**

This performance evaluation was part of USDA-ARS National Program 206: Manure and Byproducts Utilization; CRIS Project 6657-13630-001-00D “Improved animal manure treatment methods for enhanced water quality.” It was partially funded by North Carolina State University and its sponsor Smithfield Foods, Inc through USDA Agreement 58-6657-2-202, NCSU Subcontract #2001-0478-02. The investigators are grateful to the following individuals that contributed to the success of the evaluation:

Lewis Fetterman, Super Soil Systems USA, for project leadership,  
Dr. Ray Campbell, Super Soil Systems USA, for directing a successful manure compost operation, and collecting and providing detailed composting records used in this report,  
Shane Ward and Nelson Renfrow, Super Soil Systems USA, for their help with sampling at Goshen Ridge and Hickory Grove sites,  
USDA-ARS Florence, SC: Terry Bradshaw, Traci Stokes, and students Sandy Roberts and Jennifer Hemingway, for their help with sampling or laboratory testing and analyses,  
USDA-ARS Beltsville, MD: David Ingram and Michele Sumi for their help with microbial compost determinations,  
Lynn Worley-Davis, NCSU, for coordination with OPEN team evaluation, and  
Dr. Mike Williams, NCSU, for leadership in the process of implementation, demonstration, and identification of Environmentally Superior Technologies in North Carolina.