

DAIRY GAS EMISSIONS MODEL

Reference Manual

Version 4.0

**C. Alan Rotz, Dawn S. Chianese, Felipe Montes, Sasha
Hafner and Henry F. Bonifacio**

**Pasture Systems and Watershed Management Research Unit
Agricultural Research Service
United States Department of Agriculture**

July 2026

Executive Summary

The Dairy Gas Emissions Model (DairyGEM) is a software tool for estimating ammonia, hydrogen sulfide, greenhouse gas (GHG), and volatile organic compound (VOC) emissions of dairy farms as influenced by climate and management. A dairy production system generally represents the processes used on a given farm, but the full system extends beyond the operation boundaries. A production system is defined to include emissions during the production of all feeds whether produced on the given farm or elsewhere. It also includes GHG emissions and energy use that occur during the production of resources used on the operation such as machinery, fuel, electricity, and fertilizer. Manure is assumed to be applied to cropland producing feed, but any portion of the manure produced can be exported to other uses external to the system.

DairyGEM uses process level simulation to predict ammonia, hydrogen sulfide, and VOC emissions from manure in the housing facility, during long term storage, following field application and during grazing. Process-based relationships and emission factors are used to predict the net emission of carbon dioxide plus all emissions of methane and nitrous oxide. All emissions are predicted through daily simulations of feed use, animal production and manure handling. Daily emission values of each gas are summed to obtain annual values.

Ammonia emissions occur from the pen or barn floor, during manure storage, following field application, and during grazing. Barn floor emissions are determined separately for cow and growing animal facilities. For each facility, hourly emission rates are a function of the type of housing facility, the nitrogen level in excreted manure, temperature, air velocity, and other factors. When long term manure storage is used, ammonia emissions continue from the storage facility as a function of manure nitrogen and solids contents, storage design, temperature, and wind velocity. Following field application of manure, ammonia is rapidly emitted unless it is incorporated by a tillage operation or directly injected into the soil. For grazing animals, ammonia is emitted from urine and fecal excretions where the emission rate is again a function of temperature and wind velocity.

Hydrogen sulfide emissions are predicted using a process-based model similar to that used for ammonia. Since hydrogen sulfide is created under anaerobic conditions, most of this emission occurs during anaerobic storage of manure. The barn floor or open lot surface may also be an important source with minor emissions following field application and during grazing. Emissions from the barn floor are related to the sulfide content of the manure, manure pH, air temperature, and air velocity. These same factors influence emissions during long-term storage where the anaerobic conditions are conducive to sulfide production. When stored manure is broadcast on fields, any sulfide remaining in the manure is quickly lost and further formation ceases under these aerobic conditions. Very small amounts of hydrogen sulfide are produced and released from feces deposits on pasture as influenced by temperature.

VOC emissions are predicted from silage and manure sources. Silage sources include the face of an open silo, the feed mixer, and the feed bunk. Manure sources are the barn floor, long term storage, following field application, and during grazing. Process simulation is used to predict emissions from each source for major compound groups. These group values are weighted by their reactivity in the atmosphere and summed to get a total emission in potential smog forming units.

Carbon dioxide emissions include the net annual flux in feed production and daily values from animal respiration and microbial respiration in manure on the barn floor and during storage. The annual flux in feed production is that assimilated in the feed minus that in manure applied to cropland. Emission of carbon dioxide through animal respiration is a function of animal mass and daily feed intake, and that from the floor is a function of ambient or barn temperature and the floor surface area covered by manure. Emission from a manure storage is predicted as a function of the volume of manure in the storage using an emission factor. Anthropogenic carbon dioxide emission comes from fuel combustion in farm engines which is determined from the amount of fuel used in the production and feeding of feeds and the handling of manure. When urea-based fertilizer or lime are used in feed crop production, their decomposition also contributes to anthropogenic emission.

Methane emissions include those from enteric fermentation, the barn floor, manure storage, and feces deposited in pasture. Emission from enteric fermentation is a function of the metabolizable energy intake and the diet starch and fiber contents for the animal groups making up the herd. Daily emissions from the manure storage are a function of the amount of manure in the storage and the volatile solids content and temperature of the manure. Emissions following field application of manure are related to the volatile fatty acid content of the manure and the amount of manure applied. Emissions during grazing are proportional to the amount of feces deposited on the pasture; that emitted in the barn or pen is a function of the amount of manure deposited, temperature, and the floor area covered by the manure.

Nitrous oxide emissions are those emitted from crop and pasture lands during the production of feeds with possible emissions from the manure storage and barn floor. An emission factor approach is used to estimate annual emissions in feed production where the default emission is 1% of the fertilizer and manure N applied to cropland and 2% of that

applied to pastureland. Emission from the crust on a slurry manure storage is a function of the exposed surface area.

Total greenhouse gas emission is determined as the sum of the net emissions of the three greenhouse gases where methane and nitrous oxide are converted to carbon dioxide equivalent units (CO₂e). The net GHG emission and total energy use are determined through a farmgate life cycle assessment (LCA) of the production system including both direct and upstream sources. Direct emissions are those emitted from the operation or production system during the production process. Upstream emissions are those that occur during the manufacture or production of resources used in the production system. These resources include machinery, fuel, electricity, fertilizer, pesticides, plastic, and any replacement animals not raised on the operation. Upstream emissions from the manufacture of equipment are apportioned to the feed produced or manure handled over their useful life. By totaling the net of all annual emissions from both direct and upstream sources and dividing by the annual cattle weight produced, a carbon intensity or footprint is determined in units of CO₂e per unit of body weight produced.

Introduction

Support for the Clean Air Act has increased pressure on regulatory agencies to address airborne emissions from animal feeding operations ([NRC, 2003](#)). Ammonia emitted in livestock production is of particular interest because of the potential environmental impact and the loss of nitrogen, a valuable nutrient that needs to be replaced with costly petroleum-based fertilizers. Ammonia in the atmosphere can precipitate in acid rain contributing to surface water eutrophication and over-fertilization of ecosystems; it can also contribute to the development of small particulate matter in the atmosphere, which is a human health concern ([NRC, 2003](#); [Arogo et al., 2003](#); [Renard et al., 2004](#)).

Hydrogen sulfide is another toxic chemical that is regulated under the Clean Air Act. Hydrogen sulfide is produced as manure decomposes anaerobically, resulting from the mineralization of organic sulfur compounds as well as the reduction of oxidized inorganic sulfur compounds by sulfur-reducing bacteria ([Blunden et al., 2008](#)). Potentially, hazardous hydrogen sulfide levels can be produced in confined manure storage areas, while nuisance emissions can be generated in several other areas on a farm. Chronic and acute exposure to certain levels of hydrogen sulfide can cause respiratory distress syndrome or pulmonary edema ([Predicala et al., 2008](#)), and fatalities have occurred with exposure to this poisonous gas. Aside from the health issues, hydrogen sulfide contributes to odor, one of the main public relation issues between farmers and surrounding populations. Hydrogen sulfide also causes corrosion and deterioration of the concrete used in farm facilities. Considering the odorous, toxic and corrosive nature of this gas, a variety of approaches aimed to control the production and emission of this compound in livestock facilities are being investigated ([Predicala et al., 2008](#)).

Volatile organic compound (VOC) emissions are a growing concern in some regions due to their potential role in smog formation ([Hafner et al., 2013](#), [Howard et al., 2010](#)). Silage has been identified as a significant source of VOC emissions from farms, but manure also contributes. Very limited measured data on VOC emissions from farms are available. A process model was developed to predict emissions, but to this point the limited measured data available has not permitted a complete evaluation of the model ([Bonifacio et al., 2017a](#)). Model predictions related to VOC emissions should be considered as preliminary estimates, but they do reflect management effects on their emission.

Greenhouse gas (GHG) emissions have also become a national and international concern. Important GHGs emitted by animal agriculture include carbon dioxide (CO₂), methane (CH₄), and nitrous oxide (N₂O). Anthropogenic emissions have increased atmospheric concentrations of GHGs throughout the twentieth century, and this is thought to be contributing to an increase in the surface temperature of the earth and other climatic disturbances ([IPCC, 2007](#); [Forster et al., 2021](#)). As a result, scientists and policymakers have focused on both quantifying and reducing anthropogenic emissions of GHGs world-wide.

Agriculture is believed to contribute about 6% of total GHG emissions in the U.S. with about half of this emission from livestock and manure sources ([EPA, 2005](#)). Although this contribution represents only a small percentage of CO₂ emissions, agriculture is the largest emitter of N₂O and the third largest emitter of CH₄, accounting for 75% and 30% of their respective national total emissions ([EIA, 2006](#)). The FAO ([FAO, 2006](#)) has reported that, world wide, agriculture contributed more GHG emissions than the transportation sector but in the U.S. emissions from all of agriculture are about 25% of that released through the combustion of transportation fuel ([EPA, 2008a](#)). Within agriculture, plant production is generally a net sink for carbon (C) in the production of food, feed, and fiber products. In livestock agriculture though, animals, particularly ruminants, release GHGs during feed digestion with further emissions during the handling of their manure.

With the growing concern over GHG emissions, a need has developed for expressing the total emission associated with a product or service. A term that has come to represent this quantification is the C footprint. This term originated from a methodology known as the 'ecological footprint' ([Kitzes et al., 2008](#)). This footprint was defined as the area of biologically productive land needed to produce the resources and assimilate the waste generated using prevailing

technology. The term C footprint refers specifically to the biologically productive area required to sequester enough C to avoid an increase in atmospheric CO₂. This was originally calculated as the required area of growing, non-harvested forest land. Today, a more practical definition of C footprint is the net GHG exchange per unit of product or service. This net emission is best determined through a life cycle assessment that includes all important emission sources and sinks within the production system as well as those associated with the production of resources used in the system.

Measuring the assimilation and emission of gaseous compounds from dairy farms is difficult, relatively inaccurate, and very expensive. Emissions are also very dependent upon farm management, so large differences can occur among operations. The various factors affecting emissions interact with each other as well as with the climate, soil, and other components, requiring a comprehensive evaluation to predict their overall impact. All individual factors and their interactions must be analyzed to identify cost-effective management practices that minimize net farm emissions. The National Research Council's Ad Hoc Committee on Air Emissions from Animal Feeding Operations identified the limitation of available methodologies to estimate national emissions from animal agriculture and recommended that the U.S. EPA develop a process-based modeling approach incorporating nutrient mass balance constraints and appropriate component emission factors (NRC, 2003). Mechanistic models representing volatilization processes as influenced by production and environmental conditions provide robust tools for estimating and evaluating management influences on emissions (Ni, 1999).

Model Scope

DairyGEM provides a relatively simple tool for predicting ammonia, hydrogen sulfide, and volatile organic compound (VOC) emissions and the integrated net global warming potential of all GHG emissions from dairy operations. Upstream emissions and resource use in the production of inputs such as machinery, fertilizer, fuel, electricity, and chemicals are also included to determine overall carbon, fossil energy and water footprints for the milk produced. Our objective is a relatively simple and easy-to-use software tool that includes process modeling to predict each of the major gaseous emissions. Model development is done in collaboration with basic research on gaseous formation and emission and whole farm monitoring work. As such, the model continues to evolve as new information is developed. The model is provided as a tool for estimating net emissions and major environmental footprints of cattle operations. As the model develops, improved accuracy in prediction is anticipated, but large changes in overall predictions are not expected.

DairyGEM is designed to estimate environmental impacts related to milk production on dairy farms. The boundaries of the production system include the production of all feeds used to maintain the herd (Figure 1.1). All manure nutrients are assumed to be returned and used in crop production unless a portion or all of the manure is designated as exported from the production system. Likewise, emissions during the production of all feed crops are included whether those feeds are produced on the same farm with the animals or they are purchased from another source. This approach provides a comprehensive evaluation of cattle production that looks beyond the specific boundaries of the farm. A more complex tool, the Integrated Farm System Model, is available that evaluates emissions and footprints along with other nitrogen and phosphorus losses and farm economics (available at <https://www.ars.usda.gov/northeast-area/up-pa/pswmru/docs/integrated-farm-system-model/>).

Model Overview

DairyGEM includes a process based simulation of gaseous emissions from animal housing, manure storages, following field application of manure and during grazing. These major processes that create gaseous emissions are simulated through time over many years of weather to obtain long term estimates of maximum and average emissions. The major components of the model include available feeds, animal intake and manure production, and manure handling. The feeds available and their nutrient contents are provided through user input. Balanced rations are prepared for each animal group on the farm and their feed intake is determined to meet their energy and protein requirements. Based upon feed intake, growth and milk production, the nutrient output in manure is predicted. From this nutrient excretion, emissions are predicted as a function of weather conditions and management practices.

Model Input

Input information is supplied to the program through two data files: farm and weather parameter files. The farm parameter file contains data that describe the farm management. This includes feeds and pasture available, number of animals at various ages, housing facilities, and manure handling strategies. These parameters are quickly and conveniently modified through the menus or dialog screens in the user interface. Any number of files can be created to store parameters for different operations for later use in other simulations.

The weather data (location) file contains daily weather for many years at a particular location. Files for each state in the U.S. are provided. All files are in a text format so they can be easily created or edited with a spreadsheet program or text editor. When creating a new weather file, the exact format for the weather data file must be followed. The first line contains a site code, the latitude and longitude for the location, the atmospheric carbon dioxide level, a parameter

set to zero for the northern hemisphere and one for the southern, and the nitrogen concentration or deposition in local precipitation. The remainder of the file contains one line of data for each day. The daily data includes the year and day of that year, solar radiation (MJ/m²), average temperature (°C), maximum temperature (°C), minimum temperature (°C), total precipitation (mm), and average wind velocity (m/s). Only 365 days are allowed each year, so one day of data must be removed from leap years. The first column must be 5 characters wide and the remaining columns are 6 characters.

Model Algorithm

The model is a structured program that uses various objects or subroutines to represent processes on the cattle operation. There are four major submodels that represent the major component processes. These major components are: feed availability, the herd, manure handling, and gas emissions. The functions, relationships, and parameters used in each of these submodels are described in detail in the following sections of this reference manual. The emphasis of this section is to describe the linkage and flow of information for the overall model.

The model begins by gathering input information. All parameters stored in the requested farm parameter file are read. The model user can modify most of these parameters by editing the displayed values in the input menus and dialog boxes. If the file is saved, the modified values become permanently stored in the file or new files can be created using different names.

After the input parameters are properly set, a simulation or analysis can be performed. The simulation is performed on a daily time step over each weather year. In a given year, the simulation begins with feed utilization and herd production. Feed allocation, feed intake, growth, and manure production are predicted for each animal group making up the herd. These processes are simulated on a monthly time step, where feed rations for all animals are formulated for each month based upon the feeds available (See [Herd](#) section). If pasture or a seasonal calving herd is used, the pasture available on a given month and the stored feeds available that month are used to feed the animal groups. Supplemental feeds are purchased to meet protein and energy requirements of the herd.

Following the herd simulation, the manure produced is tracked through the collection, storage, and application processes to predict gas emissions and the balance of nutrients (See [Manure and Nutrients](#) section). Manure production is predicted from the feed dry matter consumed and the digestibility of those feeds. Emissions during manure handling processes are then simulated on a daily time step as influenced by manure characteristics, temperature, rainfall, and solar radiation.

Following the simulation of manure handling and emission processes, the simulation proceeds to the next weather year and the process is repeated. This annual loop continues for 15 years. After the simulation is complete, all performance and emission information is organized and written to output files.

Model Output

The model creates output in four separate files. Following a simulation, the files requested appear in overlaying windows within the primary DairyGEM window where they can be selected and viewed. The four output files are summary, full report, optional, and parameter tables. The summary output is provided by default. The three optional tables contain the average feed use, gaseous emissions and environmental footprints over the simulated period. Values include the mean and maximum daily emission over all simulated years. The more extensive full report includes these values and more. In the full report, values are given for each simulated year as well as the mean and variance over the simulated years.

Optional output tables are available for a closer inspection of how the components of the full simulation are functioning. These tables include a breakdown of animal rations and feed use, upstream resource inputs, annual weather summaries and a breakdown of VOC emissions. Optional output is best used to verify or observe some of the more intricate details of a simulation. This output can become lengthy and as such is only available when requested.

Parameter tables can also be requested. These tables summarize the input parameters specified for a given simulation. Any number of tables can be requested where tables are grouped for major sections of model input. These sections include: available feed, grazing, herd and facility, and manure handling parameters. These tables provide a convenient method for documenting the parameter settings for specific simulations.

The DairyGEM software can plot several components of the model output. These include the daily emissions of ammonia, hydrogen sulfide, methane, carbon dioxide, and total GHG (CO₂e) from the barn and manure storage, as well as the whole farm over a full year. These plots can be viewed on the monitor and printed on a compatible printer.

At the completion of a simulation, a bar chart is provided summarizing the predicted emissions. Three bars represent average annual emissions of ammonia, methane, and total GHG emissions. Each bar is divided to show the emissions occurring from the barn, manure storage, feed producing fields, and grazing animals. When parameter

changes are made and a new simulation is run, the bar chart shows a comparison of the two options. A pie chart is also available representing the environmental footprints of the production system. The chart provides a breakdown of the emissions from animal production, manure handling, engine operation, and the upstream emissions from the production of resources used in the production system.

Available Feeds

The model user specifies the amount of various forages and grain typically produced for feeding the herd. This should represent the average annual amounts of these feeds normally produced on the farm. For farms that rely heavily upon purchased forage, these values can represent average annual amounts purchased.

Concentrate feeds available for feed supplementation are also specified. These include protein and energy supplements. The amounts of each used are the total of that required to meet the protein and energy requirements of all animal groups making up the herd. These amounts are determined by the herd component of the model (See [Feed Characteristics](#) section).

The nutritive contents of each available feed are also set by the user. Although nutritive contents may vary, particularly within forage types, the values set must reflect average expected values. Forages can be set for both high and lower quality categories. High quality forage will normally be used in formulating rations for early lactating cows while lower quality forages will be used for older heifers, dry cows and late lactating cows depending upon how much is available (See [Herd Management](#) section).

Assigned nutritive contents for each available feed include: crude protein (*CP*), protein degradability, acid detergent insoluble protein (*ADIP*), net energy for lactation (*NEL*), and neutral detergent fiber (*NDF*). Concentrate feeds can also include a feeding limit. This limit controls the maximum amount of that feed that can be included in the ration of early lactating animals. When this limit is met, other available feeds must be used to meet remaining nutrient requirements of that animal group (See [Herd Management](#) section).

Pasture Use

A portion of the forage can be fed directly to animals through the use of grazing. The model user sets the average annual amount of pasture DM available to the herd and the number of months during the year when pasture is available. The amount of pasture available varies within the grazing season. For simplicity, this variation is set within the model to reflect typical within season variation in pasture availability.

Predicting the nutritive content of grazed forage is very difficult since animals are selective in what they consume. Grazing animals tend to eat the plants and the plant parts that are highest in nutritive value. Therefore, prediction of the nutritive content of the whole crop is not relevant. For simplicity, the nutritive contents of pasture are assigned with different values during the various months of the grazing season. Values are assigned for each of the following time periods: April through May, June, July through August, September through October, and over winter.

Nutritive information for pasture includes crude protein (% DM), degradable protein content (% CP), acid detergent insoluble protein content (% CP), net energy of lactation (Mcal per lb or kg DM), total digestible nutrient content (% DM) and neutral detergent fiber content (% DM). Additional internal calculations include particle size and particle NDF. For lack of better information, the portion of a grass-based pasture that is large particles is set at 80% and the *NDF* content of this portion of the crop is set equal to the *NDF* of the whole crop. Fill and roughage units for the pasture are determined as a function of the fill or roughage factors, *NDF* contents of small and large particles, and the portion of the crop in small and large particle pools (See [Feed Characteristics](#) section). Assigned fill factors for pasture are 1.2 for the large particle pool and 0.5 for the small particle pool. Default roughage factors are 1.0 and 0.7 for large and small particles, respectively.

A grazing strategy is defined by the animal groups placed on pasture and the amount of time they have access to the pasture. Each animal group (lactating cows, nonlactating cows, and replacement heifers) can be grazed or feed in confinement, and the number of months on pasture is assigned. All year (12-month) grazing implies that the animals are maintained outdoors year around even though pasture growth may not be available during several months of the year. When not on pasture, animals are maintained in the selected housing facility. If they are on pasture all year, a housing facility is not needed.

Pasture is allocated along with other available feeds to meet the nutrient needs of each animal group while making best use of the available pasture. This is done by developing a partial total mixed ration that best compliments the quantity and nutrient content of the pasture consumed (See [Herd](#) section). The pasture consumed by a given animal group is limited by either that available, grazing time, or the maximum amount of pasture forage that can be consumed by that animal. The maximum consumption is the maximum amount of this forage that can be included in the animal

diet along with the available supplemental feeds while maintaining the desired production level (or as close to this level as can be obtained). Diets of each animal group on pasture are formulated with a linear program set to maximize forage use in rations (See [Herd](#) section).

Determining the amount of pasture forage available to each animal group requires proper allocation among the different groups of grazing animals. This allocation is done by comparing the available roughage from pasture with roughage available from other forages on the farm and the roughage requirement of the herd. Allocation is done each month to make best use of the pasture available that month, and stored feed inventories are modified to prepare for the allocation next month. The goal in the allocation each month is to use as much of the available pasture as possible, and to use stored forages at an appropriate rate so that stocks last most of the year. For example, if both alfalfa and corn silage are fed along with pasture, both forages are used each month at a rate where they will not be depleted much before the last simulated month of the year (See [Herd](#) section).

For any given month, the roughage available from pasture and other forages is the concentration of roughage units in each forage times the amount of that forage available. The roughage requirement for meeting the forage needs of the herd is estimated as a function of the number of animals in each feeding group times their average body weight times their fiber intake constraint summed over all six animal groups (See [Herd](#) section).

Rations are balanced for each of the six animal groups each month of the year. The portion of the total forage fed to each animal group that comes from pasture is set comparing available roughage to that required. If a surplus of pasture forage exists on the farm, all of the forage in the ration is provided by pasture for all animal groups that are grazed. For months when forage must be supplemented to meet herd needs, pasture is combined with available hay and silage or purchased hay to meet the roughage needs of the cattle. The ratio of pasture forage in the ration to that from hay and silage is set based upon the quantity of roughage available from each compared to that required to meet the animal's needs. Although pasture use is set to distribute available pasture across all animal groups using that pasture, the full amount of available pasture forage can be depleted. In any month where the available pasture is depleted before all animals are fed (and months when pasture is not available), any remaining animals are fed using hay and silage. The amount of pasture consumed each month is limited by that available or the forage requirement of all animal groups grazed. Any excess forage (available pasture forage minus that consumed) can carry over to the next month.

Feed Characteristics

Feed characteristics required to balance rations and predict feed intake include crude protein (*CP*), rumen digestible protein (*RDP*), acid detergent insoluble protein (*ADIP*), net energy of lactation (*NEL*), and neutral detergent fiber (*NDF*). Total digestible nutrient (*TDN*) content is also used to predict manure excretion. Typical or average parameters for major feeds are assigned but can be modified using values from NASEM (2021) or laboratory data from actual feeds fed.

A ration formulation routine was created using fill and roughage units to represent differences in fiber digestibility. A maximum forage intake implies that ruminal fill is at the maximum that the animal will tolerate and still maintain a target production. A theoretical fill unit (*FU*) is defined to represent the filling effects of forages and concentrates based on their *NDF* concentration, fraction of particles that are large or small, and filling factors for large and small particle *NDF*. The *FU* concentration in each feed is determined by:

$$FU_i = (FFL_i) (NDFL_i) (LP_i) + (FFS_i) (NDFS_i) (SP_i) \quad [1.1]$$

where FFL_i = fill factor of large particles in feed i ,

$NDFL_i$ = *NDF* concentration of large particles in feed i (fraction of *DM*),

LP_i = large particles (e.g. alfalfa stem or corn stover) in feed i (fraction of *DM*),

FFS_i = fill factor of small particles in feed i ,

$NDFS_i$ = *NDF* concentration of small particles in feed i (fraction of *DM*),

SP_i = small particles (e.g. alfalfa leaves or corn grain) in feed i (fraction of *DM*)
= $1.0 - LP_i$

NDF_i = *NDF* concentration in feed i (fraction of *DM*).

$$= (NDFL_i) (LP_i) (NDFS_i) (SP_i) \quad [1.2]$$

Large and small particle fractions in forages are related to physical characteristics of the crop. For alfalfa and grass, stems are defined as large, slow degrading particles that occupy more space in the rumen. The small particles are leaves that rapidly degrade in the rumen and thus have less filling effect. For corn and small grain silages, 85% of the stover is defined to be large particles with the remainder of the plant being small particles. For grass forages, 70% of the crop is assumed to be large particles with the *NDF* concentrations in large and small particles being equal. For other forages, the proportion of large and small particles and their *NDF* concentrations vary with growing, harvest, and storage

conditions.

Fill factors serve as weighting factors for increasing or decreasing the effect that the *NDF* in feed particle size pools has on rumen fill. Values are assigned that are inversely related to the digestibilities of those particles, i.e., a greater value represents a lower fiber digestibility and thus greater fill. Default values ([Table 1.1](#)) give equivalent production using different forages in diets balanced to similar *NDF* concentrations.

Formulating rations is related to the fiber requirement selected by the model user. A maximum fiber level in the diet is normally used to maximize forage use while meeting energy and protein requirements. Reducing the particle size of fiber can reduce or eliminate its ability to meet the minimum fiber requirement. A roughage unit (*RU*) system is used to ensure that adequate forage is included in rations. There is also the option of selecting rations that minimize forage use. Roughage units are then used to define the minimum forage allowed in rations to maintain proper rumen function while maximizing the use of concentrates.

The *RU* system considers particle size and the *NDF* concentration of feeds. The equation used to estimate *RU* for each feed is:

$$RU_i = RFL_i (NDFL_i) (LP_i) + (RFS_i) (NDFS_i) (SP_i) \quad [1.3]$$

where RFL_i = roughage unit factor of large particles in feed i ,
 RFS_i = roughage unit factor of small particles in feed i .

Values for *RFL* and *RFS* are assigned to represent the relative physical effectiveness of the *NDF* in the two particle size pools. The effectiveness of *NDF* in long grass hay is assigned a value of 1.0, and chewing activity is used to estimate the relative physical effectiveness of the *NDF* in other forages. Large particles in all forages are assigned a roughage factor of 1.0. Factors for small particles are assigned so that the weighted average of the two particle pools provides values similar to the physically effective *NDF* values assigned by [Mertens \(1997\)](#).

Fill and roughage units vary with the characteristics of the feed. This is particularly true for forages where large particle content (stem or stover portion) and *NDF* concentration in those particles vary with growing, harvest, and storage conditions ([Rotz et al., 1989](#)). Typical *FU* and *RU* values for feeds can be found in [Rotz et al. \(1999a\)](#). Although fill and roughage factors may be influenced by crop maturity and harvest method, assigned factors represented typical or normal conditions.

Adjustment parameters are provided to allow further refinement of *FU* and *RU* constraints. A fiber intake capacity can be used to increase or decrease the *FU* limit on intake. Similarly, a fiber digestibility adjustment parameter can be used to increase or decrease the *RU* of the diet.

Herd Management

A dairy herd consists of growing heifers, lactating cows, and nonlactating cows. The herd portion of the model is organized in five sections. First, the characteristics of the major animal groups are established. Next, available feeds are allocated to the animal groups. Each group's requirements for fiber, energy, and protein are then determined, and a linear program is used to find the lowest cost, nutritionally balanced mix of feeds to meet these requirements. Finally, based upon the diet fed, the quantity and nutrient content of the manure produced is determined.

Animal and Herd Characteristics

The herd is described as six animal groups: three groups of lactating cows, nonlactating cows, heifers under one year old, and heifers over one year old. There is flexibility in how the three groups of lactating cows are divided, but generally they represent early, mid, and late lactation cows. All cow groups are further subdivided between primiparous and multiparous animals with the portion of each set by the user as the replacement rate of the herd. The seven available animal types are large Holstein, average Holstein, small Holstein, Brown Swiss, Ayrshire, Guernsey, and Jersey.

Five characteristics are used to describe each animal group: potential milk yield, milk fat content, body weight (*BW*), change in *BW*, and fiber ingestive capacity. For cows, continuous functions are used to describe each characteristic over a full lactation ([Table 2.1](#)). A modified infinite Gamma function is used as the base model for each. This function has the following form:

$$Y = [A(w+s)b] / [e^{c(w+s)}] \quad [2.1]$$

where A = the intercept,
 w = week of lactation,

- s = shift factor (in weeks),
- b = exponent of time,
- c = the exponential rate of change.

Parameters b and c define the shape of the curve and parameter A determines the peak. A scaler is used to adjust these relationships for different animal breeds and sizes ([Rotz et al., 1999a](#)).

Although the feeding groups can be modified, the normal procedure is to assume that 16% of the cows are in early lactation, 23% in mid lactation, 46% in late lactation, and 15% are nonlactating. Following a standard lactation cycle, this implies that the four groups represent weeks 0 to 9, weeks 10 to 22, weeks 23 to 48, and weeks 49 to 56, respectively. The animal characteristic functions are integrated over the appropriate weeks of the lactation cycle for a given group to determine the average characteristic over that period. The change in BW is the average daily change in BW over the period. Each characteristic of the group is then determined as the average of the primiparous and multiparous subgroups weighted by the number of animals in each subgroup. The herd is normally modeled with a 56 wk lactation cycle, but feed intake and milk production are totaled for the calendar year.

If a seasonal calving strategy is selected, the lactation cycle is set to a calendar year. Seasonal calving places all cows on the same lactation cycle to better match their forage demand with available pasture forage. Either spring or fall calving cycles can be used. For a spring cycle, all cows are assumed to calve in March and they are dry during January and February. With fall calving, lactation begins in October and ends in July.

Feed Allocation

A feed allocation scheme is used to represent a producer's approach to making the best use of homegrown feeds. This scheme uses decision rules to prioritize feed use. The feeds potentially available for feeding include any combination of pasture, high-quality silage, low-quality silage, high-quality hay, low-quality hay, grain crop silage, high-moisture grain, and dry grain. Purchased feeds include grain, dry hay, a CP supplement, a rumen undegradable protein (RUP) or oil seed supplement, and an animal or vegetable-based fat supplement. Because overfeeding of some feed ingredients may result in unpalatable diets, user-specified limits prevent excessive inclusion of supplemental feeds in rations.

The preferred forage for lactating cows is a mix of grain crop silage, high-quality alfalfa/grass silage, and high-quality hay. For nonlactating cows and growing heifers, preferred forages are grain crop silage, low-quality alfalfa/grass silage, and low-quality hay. Alternative forages are used when preferred forage stocks are depleted. If grain crop silage is not available, alfalfa or grass provides the forage. If high-quality hay or silage is preferred but unavailable, low-quality hay or silage is used and vice versa. When stocks of farm-produced forage are depleted, purchased hay is used. When an animal group is grazed, the preferred forage is always pasture. If ample pasture is not available to meet the needs of the grazing animal groups, each group is supplemented with at least one other forage. If grain-crop silage is available, this will be one of the forages fed. The next priority is given to grass or alfalfa silage with the lowest priority given to dry hay because it is the easiest to sell. Lower priority forages are used when preferred forage stocks are depleted.

A priority order for allocation is used to match forage quality with the animal group that best uses the available nutrients. Feeds are allocated first to animals with low nutrient requirements (non lactating cows and heifers) using low-quality forage. After that, the high-quality forage is allocated to the early lactation cows to maximize their production. Feeding the lower producing cows last allows low-quality forage to be used by animals with lower nutrient requirements when stocks of high-quality forage are depleted. Similarly, feeding younger heifers after non lactating cows and older heifers assures that, if a shortage of low-quality forage exists, animals with higher requirements receive the better feed.

The portion of each forage used in rations is based upon the amount of each forage type available and an estimate of the total forage requirement for the herd. Both available forage and forage requirement are modeled using fill units (FU). Total forage FU requirement for the herd is proportional to the sum of the maximum FU requirements of the individual animal groups:

$$ARF = \sum FR_j (FIC_j) (BW_j) (365/yr) (N) \quad [2.2]$$

where ARF = annual forage requirement for the herd, FU/yr ,

FIC_j = fiber ingestive capacity for animal group j , FU/kg of BW/d ,

BW_j = average BW in animal group j , kg,

FR_j = portion of the maximum FU that normally comes from forage for animal group j

N = number of animals in a group

Values of FR_j vary among animal groups and with the amount of forage used in diets. Average values for nonlactating

cows, older heifers, and young heifers are 0.80, 0.80, and 0.98, respectively. For maximum forage rations, values of FR_i for early, mid and late lactation groups are 0.83, 0.90, and 0.93, respectively. For minimum forage rations, these values are 0.80, 0.68, and 0.57.

The objective in proportioning forage is to give first priority to pasture and second priority to silage. The lowest priority is given to dry hay because it is the easiest to market. Total fill units available from each forage source are determined as the product of the available forage DM and the FU concentration in that forage. When available, grazed forage is used to meet as much of the annual forage requirement as possible. The portion of grazed forage permitted in the diet is limited to that available in the pasture when distributed among the grazed animal groups.

A portion of each forage is mixed to meet the remaining forage requirement set by the ratio of the FU available in that forage to the total FU of all available forages. After the portions of pasture and ensiled feeds in the ration of a given animal group are set, the remaining forage requirement is met with dry hay. This procedure maximizes the use of ensiled feeds, so that excess forage is normally dry hay. An additional option forces a user-specified, minimum amount of dry hay into rations even if it is not produced on the farm. This option enables the modeling of farms that use a preferred practice of feeding 10 to 15% of diet DM as hay.

Once a ration is formulated, the final step is to determine the number of animals in the group that can be fed that ration for a given month from current feed stocks. If feedstocks do not allow all animals in the group to be fed the given ration for the full month, as many animals as possible are fed. Remaining animals of the group are fed rations balanced with alternate feeds. If milk production within the group is different because different rations are used, a weighted average milk production is computed for the group. Remaining feed quantities are updated each time a group of animals is fed.

Animal Nutrient Requirements

Diets for a representative animal of each animal group are formulated to meet four nutrient requirements: a minimum roughage requirement, an energy requirement, a minimum requirement of rumen degradable protein (RDP), and a minimum requirement of RUP. The minimum roughage requirement stipulates that the total roughage units in the diet must meet or exceed 21% of the total ration DM ([Mertens, 1992](#) and [1997](#)). This assures that roughage in the formulated ration is adequate to maintain proper rumen function.

The energy and protein requirements for each animal group are determined using relationships from the Cornell Net Carbohydrate and Protein System, level 1 ([Fox et al., 2004](#)). The energy requirement is the sum of the requirements for maintenance, lactation, pregnancy, and growth. For lactating cows, energy can also be available from weight loss. The maintenance energy requirement is determined as influenced by lactation, activity, and ambient temperature ([Fox et al., 2004](#)). The lactation effect is determined using a thermal neutral maintenance requirement for fasting metabolism of $0.07 \text{ Mcal/day/SWB}^{(0.75)}$, but this requirement can be adjusted using an adjustment factor entered as a breed characteristic.

Activity is modeled as the sum of the daily requirements for standing, changing position, and distance traveled ([Fox et al., 2004](#)). Time spent standing is set at 12, 14, 16, and 18 h/d for confinement, half-day intensive grazing, full-day intensive grazing, and continuous grazing, respectively. Distances traveled for these four options are 0.5, 1.5, 1.0, and 2.0 km/d, respectively. A temperature effect and the resulting potential for heat stress are a function of the current and previous month's average temperature and the current relative humidity, wind speed, and hours of exposure to sun light ([Fox et al., 2004](#)). For simplicity, the relative humidity and wind speed are set at average values of 50% and 1.6 km/h, respectively. Exposure time is set at 0, 10 h/day for confinement and full-day grazing systems. Cold stress effect is modeled considering an average hide thickness and hair coat ([Fox et al., 2004](#)), but this effect seldom occurs using temperatures averaged over a monthly time step.

Cows also include an energy requirement for lactation, and both cows and replacement heifers include a gestation requirement during pregnancy. Metabolizable energy requirement for lactation is proportional to milk yield as influenced by milk fat content ([Fox et al., 2004](#)). The gestation requirement is a function of the number of days pregnant and calf birth weight ([Fox et al., 2004](#)). Energy and protein requirements for lactation are increased by a lead factor to ensure that the requirements of a greater than average portion of the cows in each group are met. A lead factor of 12% is used for the early lactation group, and 7% is used for the mid and late lactation groups. Diets are formulated using these increased requirements, but feed consumption is determined to meet the original requirements.

Energy required for growth is a function of average daily gain (ADG) and equivalent empty body weight ([Fox et al., 2004](#)). To determine an equivalent empty body weight, a standard reference weight is assumed. This standard reference weight is 478 kg for cows and older replacement heifers and 462 kg for heifers less than 1 yr old.

Maintenance energy is based upon an animal in its third or higher lactation cycle. The total net energy requirement is adjusted by the multiple of maintenance of the animal group to model the efficiency of energy use as

influenced by dry matter intake. The multiple of maintenance is the ratio of the total net energy requirement to that needed for maintenance ([Table 2.2](#)). The total requirement is reduced by 4% for each multiple of maintenance less than three and increased by 4% for greater multiples of maintenance ([NRC, 1989](#)). Although increased intake actually affects the amount of energy extracted from the feed, this effect is included on the requirement side of the constraint equation to simplify the linear programming matrix ([Table 2.2](#)).

Finally, the net energy requirement is increased to include an energy cost for excess protein in the diet. Our model implementation required a different approach for the calculation of urea cost than that used by Fox et al. ([2004](#)). Each kilogram of excess protein is assumed to require 0.7 Mcal of net energy to convert this protein to urea for excretion ([Tyrrell et al., 1970](#)). Excess protein includes both RUP and RDP ([Table 2.2](#)). Excess RDP is that greater than the amount useful for making microbial CP (based on non-fat energy intake). Intake of RUP that causes total metabolizable protein to exceed the metabolizable protein requirement is considered excess.

The metabolizable protein requirement of each animal group is the sum of the maintenance, lactation, pregnancy, and growth requirements. The maintenance requirement is a function of SBW, lactation requirement is proportional to milk yield and milk protein content, gestation is a function of calf birth weight and days pregnant, and the growth requirement is related to ADG and the net energy required for growth ([Fox et al., 2004](#)). The metabolizable protein requirement includes RDP and RUP requirements. The RDP requirement is the microbial crude protein (MCP) requirement divided by 0.9, where MCP is defined as 13% of the diet TDN excluding TDN from added fat sources ([NRC, 2000](#)). The RUP requirement is the total metabolizable protein requirement minus 64% of the MCP requirement. Only energy coming from sources other than added fat is considered useful for making MCP. Added animal or vegetable fat helps meet the energy requirement, but this added energy does not yield bacterial cells. Unavailable protein in the diet is set at 70% of the ADIP in forages and 40% of that in concentrates ([Weiss et al., 1992](#)). Because some of the ADIP of feeds is not included in the RUP, the ratio of digestible RUP to total RUP is set to 0.87.

Mineral requirements considered in the model include P and K. The absorbable P requirement for each animal group is the sum of the requirements for maintenance, lactation, gestation, and growth ([NRC, 2001](#)). The maintenance requirement includes urine and fecal P where urine P is 2 mg P/kg of animal BW and fecal P is 1 g/kg of DM intake. For lactating cows, the lactation requirement is 0.9 g/kg of milk yield. The gestation requirement occurs when cows or heifers are over 190 days pregnant, and the gestation requirement is an exponential function of the number of days pregnant ([NRC, 2001](#)). The growth requirement for growing animals is a function of the animal SBW and ADG ([NRC, 2001](#)). The sum of the individual requirements provides the total absorbable P requirement. A user-defined adjustment factor is used to increase or decrease this total requirement for all animal groups if an adjustment is desired. The P in forages fed to cattle is assumed to be 64% absorbable and that in concentrates is 70% absorbable. An option is available to override this calculated requirement with a value specified by the model user. The K requirement of each animal group is set at 1% of DM intake ([NRC, 1989](#)).

These requirements set the minimum P and K intakes of each animal group, and the P requirement is used to estimate the purchase of mineral supplements ([Rotz et al., 1999a](#)). Mineral supplements include phosphate, salt, and other minerals. Phosphate required is modeled as 5.3 times (assuming a 19% P concentration) the difference between the P requirement and the P contained in feeds summed over all animal groups. The P requirement can be adjusted by the user to be greater or less than that determined by the NRC ([2001](#)) relationships. Phosphorus in each feed is the user-specified P concentration times the DM fed. The quantity of salt and other minerals fed is modeled as 0.5% of the total feed DM consumed. For additional control, the model user can also set the P requirements of each animal group in the herd.

Feed Intake and Milk Production

Animal diets and performance are modeled using a linear program that simultaneously solves five constraint equations in a manner that maximizes herd milk production with minimum cost rations. The constraints include a limit on ruminal fill and constraints for each of the four requirements described above. The ruminal fill limit is the product of the fiber ingestive capacity and the average animal weight for the given animal group ([Mertens, 1987](#)). Thus, the sum of the fill units of the feeds in the ration must be less than or equal to this maximum ingestive capacity ([Table 2.2](#)). The second constraint is the roughage requirement. As described above, the sum of the roughage units of all feeds in the diet must be greater than 21% of the ration DM ([Table 2.2](#)).

The third constraint equation is that the energy consumed must equal the energy requirement. An equality is used to ensure that an energy balance is maintained and that intake and feed budgets are accurate for each animal group. The total NE from all feeds in the ration minus the energy cost of excess dietary protein must equal the requirement ([Table 2.2](#)). The energy cost of excess protein places some feed characteristic terms on the requirement side of the equation. To simplify the linear programming matrix, the equation is rearranged so that all feed characteristics are on the left side of the constraint equation.

The last two constraints specify the minimum protein requirement in the ration. The *RUP* constraint requires that 87% of the sum of the *RUP* in all feeds must be greater than or equal to the *RUP* requirement (Table 2.2). The *RDP* constraint requires that the sum of the *RDP* contents of feeds plus the rumen influx protein (15% of feed *CP*) be greater than or equal to the rumen available protein requirement (Table 2.2).

The five constraint equations are simultaneously solved with the objective of minimizing ration cost. Ration cost is determined using relative prices of feed ingredients. For grain and concentrates, the relative price is a long-term average price. For forages, the relative price is set to zero for maximum forage diets. With a low relative price, the model uses as much forage as possible in ration formulation. Another user-specified option allows a minimum forage diet for lactating animals. For this option and these animal groups, the price of forage is set high relative to concentrates forcing a minimum amount of forage in rations.

The constraint equations are solved for each of the six animal groups making up the herd. Each solution provides a ration that meets the minimum roughage, minimum protein, and energy requirements without exceeding the limit for intake. If a feasible solution is not found for early lactating animals, the milk production goal for the group is reduced by 0.5% and the procedure is repeated until a feasible solution is found. For later lactation groups, milk yield predicted by the functions of Table 2.1 is reduced in proportion to the decrease found in early lactation. A set of feasible solutions for all animal groups, therefore, gives both balanced rations and a herd production level. In this case, milk production is the maximum that can be achieved considering the nutritional value of available forage and the type and amount of concentrates fed.

An option is available for balancing rations based upon crude protein content rather than protein fractions. With this option, the degradable protein constraint is replaced with a crude protein constraint. The feed protein available becomes the DM of each feed consumed times its crude protein content and the requirement becomes the user-specified crude protein level times the total DM intake. An equality is used to force the fed protein to equal the set requirement. If a feasible solution is not found, a warning message is given. This indicates that the specified crude protein content is too low or too high to be met with the available feeds. The set crude protein content must be adjusted to allow a feasible solution.

The average annual milk production of the herd is also converted to fat and protein corrected milk using a standard milk fat content of 4.0% and milk protein content of 3.3% (IDF, 2022). A correction factor is determined as:

$$FPCF = 0.2534 + 0.1226 (MF) + 0.0776 (MP) \quad [2.3]$$

where *FPCF* = fat and protein correction factor

MF = milk fat content, %

MP = milk protein content, %

Average milk fat content is a user defined parameter, and milk protein is set as a function of the fat content:

$$MP = 1.7 + 0.4 (MF) \quad [2.4]$$

Annual milk production is multiplied by *FPCF* to obtain fat and protein corrected milk.

Manure DM and Nutrient Production

Manure DM production is the sum of the dry matters from feces, urine, bedding, and feed lost into manure. Fecal DM is the total quantity of all feeds consumed by each animal group multiplied by the fraction of indigestible nutrients (1 - *TDN*) of each feed. The *TDN* values are reduced 4% for the low production group and 8% for the medium and high production groups to account for the reductions in digestibility under multiple increases of intake over maintenance intake. Urinary DM is set as 5.7% of total urine mass. Urine production (kg/day) is predicted as a function of *DM* intake, *CP* intake, and milk production (Fox et al., 2004):

$$URINE = [3.55 + 0.16(DMIA) + 6.73(CPIA) - 0.35(MILKA)] AU \quad [2.7]$$

where *DMIA* = *DM* intake per 454-kg animal unit, kg/day,

CPIA = *CP* intake per 454-kg animal unit, kg/day,

MILKA = milk production per 454-kg animal unit, kg/day,

AU = 454 kg animal units.

Manure *DM* is increased by the amount of bedding used and by an additional 3% of the feed *DM* intake to account for feed lost into the manure. The quantity of wet manure is determined as manure *DM* divided by a user-specified value for manure *DM* content.

The nutrients in fresh manure are determined for each simulated month through a mass balance of the six animal groups. Manure nutrients tracked are N, P and K. The quantity of each nutrient excreted is the nutrient intake minus the nutrients contained in animal tissue growth and that excreted in milk. Nitrogen intake is determined from the protein content of the feeds consumed ($CP \div 6.25$). Phosphorus and K intakes are set as the greater of the sum of that contained in feeds consumed or the requirement of the animal group. Fractions of the three nutrients in body tissue are set as average values for the herd. Nutrient concentrations in body weight sold are 2.8% N, 0.72% P, and 0.20% K. Body weight produced is based upon animal mass exported from the herd (dead or alive) minus that imported. This provides a more accurate long-term balance than tracking the change in body weight of individual animals during each month of their annual cycle. Manure also includes P and K from bedding material and feed lost into the manure. That from lost feed is set at 3% of the total intake of each nutrient, and organic bedding materials are assumed to contain 0.06% P and 2.4% K.

Manure N is partitioned between organic N and ammoniacal N. Organic N is assumed to come primarily from feces. Fecal N is fecal protein divided by 6.25 where fecal protein is the sum of the undigested bacterial protein, the undigested feed protein, and the metabolic fecal protein ([Fox et al., 2004](#)). Undigested bacterial protein is defined as 26% of the microbial crude protein (MCP, [Table 2.2](#)) produced in the rumen. Undigested feed protein includes all ADIP consumed in the animal diet plus 13% of the remaining RUP (Diet RUP minus ADIP). Metabolic fecal protein is 9% of the indigestible DM consumed ([NRC, 1989](#)). Manure organic N also includes N from feed lost into manure, N contained in bedding, and the N in scruff loss of hair and other tissue from animals. Feed loss is assumed to be 3% of the total N intake, and the N from organic bedding materials is 0.69% of the bedding DM. Scruff loss of protein (SPA) is a function of the body weight in each animal group ([Fox et al., 2004](#)):

$$SPA = 0.0002 (SBW) 0.6 / 0.67 \quad [2.8]$$

Fecal and scruff N from the herd is the product of the excretions for each feeding group, the number of animals in the group, and the length of the feeding period (30.4 d/month) summed over all animal groups. Urinary N excretion is then assumed to be the total N excreted by all animal groups minus the fecal and scruff N. Fecal and scruff N is assumed to be organic N, and all remaining N (urine N) is considered to be urea, ammonium or another form that can readily transform to ammonia following deposition. Organic N is considered stable during manure handling, and ammonia N is susceptible to volatile loss.

Manure and Nutrients

The manure component simulates a variety of options in manure handling including methods of manure collection, storage, and application. Collection methods include hand scraping or gutter cleaner, an alley scraper or tractor mounted scraper, and a flush system. Storage methods include a stack for dry manure, a concrete pad and buck wall for short-term storage of semi-solid material and tanks or earthen retention ponds for slurry or liquid manure storage. Transport and application is done with spreaders or irrigation equipment with manure spread on field surfaces, injected into the soil, or irrigated.

The model allows the user to specify up to two manure collection methods used on the farm. For each collection method, the user must assign appropriate inputs that include manure type, storage method, and machinery for field application of manure. Liquid or slurry systems are best modeled with the first or primary option while solid manure systems are best modeled using the second option.

All N flows through the herd are tracked to determine a nutrient balance. Nitrogen intake is that consumed in feeds. Nutrient levels in feeds are set by the user where N concentration is protein content divided by 6.25. Nutrient outputs include animal tissue (body weight gain) and manure. Nutrient levels in animal tissue are those given above in the [Herd](#) section. The efficiency of N use is the N obtained in animal tissue divided by the total consumed in feed. A similar but simpler procedure is used to predict excretions of phosphorus, potassium and carbon. Typical contents are assumed in the growth tissue and the remainder is excreted in manure.

Manure Handling

The quantity and nutrient content of the manure produced by the animals on the farm is a function of the feeds fed as described in the [Herd](#) section above. In each manure collection method, the total quantity of manure handled is a function of the amount and type of bedding used, the amount of water contained in the manure, and the percentage of total manure handled (assigned by the user). Bedding options include manure solids, straw, sawdust, and sand. For each collection method, the user can select the bedding type and specify the amount of bedding used per mature animal in the herd. The quantity of bedding used is determined by calculating the number of animal units on the farm with the mass of an animal unit being the average mass of a mature cow in the herd. This animal mass varies with the animal breed selected. The number of animal units thus reflects the total animal mass on the farm (including young stock) expressed in units of mature animals. Bedding use is the product of mature animal units and the use per animal unit.

The quantity of wet manure handled is determined from total manure *DM* and the user selected manure type. Manure types are dry, solid, semisolid, slurry, and liquid. Total manure *DM* includes that excreted by animals plus that of bedding and feed lost into the manure. Total manure handled is manure *DM* handled divided by *DM* content. Although *DM* content can be adjusted, preset values are 70, 20, 13, 8, and 5% for dry, solid, semisolid, slurry, and liquid manures, respectively. Dry manure is manure removed from dry lots, which is typically very dry when removed. Solid manure is that from packed beds, and semi-solid represents fresh manure plus bedding. For liquid manure, additional water from rain or other sources such as flush water is assumed, and a liquid/solid separator may be used.

Two different manure handling systems can be used on a simulated farm. The first, designated as the primary system, would normally be the system handling most of the manure. If a secondary system is used, a designated portion of the total manure dry matter is handled with this system, and the remainder is handled in the primary system. Manure nutrients entering the two systems are split in proportion to the excreted dry matter handled by each. Both systems are simulated through the same processes except that an anaerobic digester can only be associated with the primary system and composting is associated with the second system.

Storage

Manure storage options include long-term storage in tanks or clay- or plastic-lined earthen retention ponds. Essentially any storage size can be selected by setting an average diameter and depth for the structure. The type and size of storage selected controls the amount of manure that can be stored, and it influences the amount of volatile loss that occurs from storage.

Storage options include short-term, four-month, six-month, and twelve-month storage periods. With short-term storage, manure must be hauled each day or frequently without storage. This option can represent short-term storage on a slab or in a small pit. With a four-month storage, manure is emptied three times each year in the spring, summer, and fall. With a six-month storage, manure is emptied twice each year in the spring and fall. For twelve-month storage, it is emptied once a year in the spring. For either of the two long-term storage options, the manure produced during that period of time each year is compared to the storage capacity. If the storage is too small to hold the manure produced, the simulation continues but a warning message is given that the user should consider increasing the storage size.

When stored in a concrete or steel tank, manure can be added to the top or bottom of the tank. Top loading represents scraping or pumping of the manure onto the top surface; whereas, bottom loading represents the pumping of manure into the bottom. With bottom loading, a crust can form readily on the manure surface. This crust helps seal the surface, reducing volatile loss from the storage facility.

Covered or enclosed tanks can also be used for manure storage to reduce volatile losses. A covered storage is defined to have some type of cover that is relatively effective in preventing volatile loss. An enclosed tank is more effective with a sealed top that is vented to prevent pressure buildup within the tank. Thus, volatile emissions are minimal with an enclosed top, but small amounts still escape through the vent. A flare is used to burn the escaping biogas to reduce methane emission.

Application

Manure deposited during grazing is applied to the grazed crop, and this portion is not included in the value for total manure handled, i.e. the manure handled is the total produced minus that deposited during grazing. The amount applied during grazing is proportional to the time the animals spend in the pasture. When animals are maintained on pasture year around, 100% of the total manure produced is deposited during grazing. For seasonal grazing, this value is about 50% but depends on the length of the grazing period.

Manure application is simulated on a daily time step. For daily hauling (or short-term storage) of manure, hauling and application occur each day with that applied being that produced on the given day. When a storage facility is emptied, manure is applied each day suitable for field operations until the storage is emptied. The amount applied each day is the total manure accumulated during the storage period divided by the days available for field application.

Manure Import and Export

Manure can be brought into the production system or exported to another use. This affects the nutrient balance of the operation and the predicted emissions. When manure is imported, the receiving operation provides a service to the manure producer by supplying land for disposal of the manure. The manure nutrients are received without an upstream burden, i.e. there are no environmental footprints associated with the incoming manure. All emissions prior to receiving the manure are associated with the operation producing the manure. Any emissions following land application are attributed to the production system receiving the manure.

When fresh manure or separated manure solids are exported, that portion of the nutrients are removed from the production system and any emissions following land application are not attributed to the cattle operation. When manure is exported in the form of compost, that portion of the nutrients are again removed, but emissions during the composting process are attributed to the cattle production system.

Nutrient Import

When manure is carried onto the cattle operation, the amount of manure imported, and the dry matter and nutrient contents of that manure are provided by the model user. The amount of manure dry matter applied to cropland is the sum of that produced on the cattle operation and that imported. Likewise, the total quantity of *N* is the sum of that produced and that imported.

The flow, transformation, and loss of the added manure nutrients follows the same relationships used for the farm-produced manure. The manure carried onto the operation has volatile losses following field application, but prior losses are not included. These losses have occurred before the manure is brought onto the farm, which should be considered when setting the *N* content of the imported manure. The *N* volatilization rate following field application is set at the same rate as that for manure produced on the farm. This is a function of the total ammoniacal *N* content of the manure and the time between spreading and incorporation of the manure. The fraction of *N* that is in a volatile form is inversely related to the organic *N* content of the imported manure.

Nutrient Export

Manure nutrients can leave the farm as fresh manure, separated solids, or compost. Similar but somewhat different relationships are used to model the effect of each type of export. The manure dry matter exported is set as a portion of the total manure dry matter produced on the farm. This can be anywhere from 0 to 100% of the manure solids produced.

When the export is raw manure, the nutrients removed are the nutrient contents of the manure following storage (or following barn scraping if no storage exists) times the manure dry matter removed from the operation. The *N* content is that determined after volatile losses occur in the barn and during storage (if manure storage is used). For the portion of the manure exported, the *N* loss that would have occurred following land application are eliminated.

When separated manure solids are removed from the farm, the nutrient removal is the dry matter removed times the nutrient contents of the removed solids. By default in the program, the *N*, *P*, and *K* contents in organic bedding material (straw or sawdust) are set at 1.4, 0.3, and 0.4%, respectively ([Chastain et al., 2001](#); [Meyer, 1997](#)). With sand bedding, fewer nutrients are retained in the solids, so the *N*, *P*, and *K* contents are set at 0.8, 0.15, and 0.4% respectively ([Van Horn et al., 1991](#); [Harrison, unpublished data](#)). The nutrient contents of the removed solids can also be set in the farm parameter file. When values are set, the default values in the program are overwritten by the user specified values.

The amount of manure handled and the nutrients in the remaining manure are adjusted for the solids removed. The solids removed are assumed to contain 40% *DM*. The manure applied to feed producing cropland is that produced minus the solids removed and the moisture contained in those solids. The *DM* content of the remaining manure is the original *DM* minus that exported divided by the remaining quantity of manure. Nutrients remaining in the production system following separation are those in manure received from the barn minus that leaving in separated solids. Nutrient losses during storage and following land application are reduced in proportion to the amount removed.

The remaining option is to remove manure and nutrients in the form of compost. The compost removed reduces the amount of manure stored and applied to cropland. When a portion of the manure is exported as compost, the nutrient content of the manure removed is that following composting. The portion removed reduces *N* losses during storage and field application in proportion to that removed. There are *N* losses during the composting process, which are included as loss from the cattle operation. The portion of the *N* lost by volatilization during composting is predicted through a simulation of the composting process ([Bonifacio et al., 2017b and 2017c](#)). This *N* loss is added to that that occurs during the storage of other manure increasing the total volatile *N* loss from the operation.

Anaerobic Digestion

Anaerobic digestion of manure on farms is becoming more common, as an energy source and greenhouse gas mitigation strategy. Another incentive may be odor reduction. In an anaerobic digester, volatile solids in manure are decomposed by microorganisms in a warm anaerobic environment to produce biogas. Biogas generally contains about 60% methane (the main component of natural gas) and 40% carbon dioxide on a volumetric basis. Biogas can be burned to create heat or used as stationary engine fuel, normally to power generators for creating electricity. Burning of the biogas converts methane to carbon dioxide, a less potent greenhouse gas. The energy produced is often used on the farm, but it can also be sold to power and natural gas companies for resale as “green” energy. The anaerobic digester is modeled in three major components: energy production, energy use, and effects on manure.

Energy Production

Biogas is produced through the microbial degradation of volatile solids in the manure. The rate of volatile solids flow into the digester is determined from the manure dry matter produced and loaded into the digester and the volatile solids content of that dry matter:

$$Q_{vs} = C_{vs} (Q_m) \quad [3.1]$$

where Q_{vs} = flow rate of volatile solids into digester, kg/d

C_{vs} = volatile solids concentration in manure influent, fraction

Q_m = loading rate of manure dry matter, kg/d

The manure loading rate is the amount of manure excreted and collected from barns (See the [Manure and Nutrient Production](#) section). The volatile solids content of the manure is primarily a function of the animal groups that produced the manure (see [Table 6.3](#)).

The amount of methane produced is a function of an assigned productivity and a conversion efficiency:

$$CH_4 = Q_{vs} (E_{vs}) (CH_{4yld}) / 100 \quad [3.2]$$

where CH_4 = methane production rate, kg/d

E_{vs} = efficiency of volatile solids conversion, %

CH_{4yld} = methane productivity per unit of volatile solids destroyed, kg CH₄/kg VS

Methane productivity from volatile solids is dependent on characteristics of the manure, and is not expected to vary substantially. Methane productivity is set at 0.35 kg CH₄/kg VS, based on predicted and measured values reported by [Hill \(1984\)](#) and measured values given in [Converse et al. \(1977\)](#) and [Moller et al. \(2007\)](#). Over all studies, reported values range from 0.23 to 0.39 kg CH₄/kg VS. The conversion efficiency is a user defined characteristic of the digester, and may range from about 20% to 45% for cattle manure, with typical values close to 30% ([Converse, 1977; Hill, 1984; Moller et al., 2004](#)). A similar relationship is used to predict carbon dioxide production where the productivity is 0.9 kg CO₂/kg VS. In practice, carbon dioxide productivity also varies. Values calculated from the data in [Converse et al. \(1977\)](#) range from 0.74 to 0.98 kg/kg, but this parameter has only a small effect on greenhouse gas emissions.

The power available in the biogas produced is a function of the energy content (lower heating value) of methane:

$$P_{bg} = E_{CH_4} (1 - L_{BG} / 100) (CH_4) / 3.6 \quad [3.3]$$

where P_{bg} = power available in the biogas produced, kW-h/d

E_{CH_4} = lower heating value of methane, 50 MJ/kg CH₄ ([Masters, 2004](#))

L_{BG} = biogas leakage rate, %

3.6 = conversion from MJ to kW-h

The biogas leakage rate is assigned by the model user; a typical value is 1-2% ([EPA, 1999](#)).

Biogas use

The total power in the biogas produced can be used on the operation to generate electricity, heat water or other uses or burned in a flare. The amount used to heat water or similar uses is set by the model user as a portion of the total produced:

$$P_{BLR} = BLR_{use} (P_{bg}) / 100 \quad [3.4]$$

where P_{BLR} = biogas power used in the boiler, kW-h/d

BLR_{use} = portion of biogas used to heat water, %

All remaining biogas power is available to generate electricity. Electricity production is a function of the efficiency of electrical generation and the capacity of the generator. The amount of electricity produced each day is limited by either the capacity of the generator and the time it is operating or the amount of biogas available:

$$ELECT = \min (24 F_{run} (CAP_g), E_g (P_{bg} - P_{BLR}) / 100) \quad [3.5]$$

where $ELECT$ = electricity produced, kW-h/d

F_{run} = portion of time engine-generator sets are running, %
 CAP_g = electric generation capacity, kW
 E_g = efficiency of electric generation, %

The portion of time engine-generator sets are running, generation capacity, and generation efficiency are all set by the model user to represent the characteristics of the system modeled. The efficiency of the engine-generator varies with the type and age of the equipment used, but will generally be about 25-35%. The goal is to keep the engine-generator sets running most of the time, but maintenance, repairs, and shut downs from lack of gas reduce this time.

Any remaining biogas that is not used for electric generation and water heating is burned in a flare. The power disposed of in the flare (P_{flr}) is determined as:

$$P_{flr} = P_{bg} - P_{BLR} - ELECT / (E_g / 100) \quad [3.6]$$

Burning the methane converts the lost carbon to carbon dioxide, which reduces the global warming potential of the emission (see the [Methane Emission](#) section). This power represents a loss of energy, and thus should be minimized.

Another option is to process and export the biogas from the operation for use as a substitute for fossil based natural gas. If the electric generator capacity is set to zero, the model exports the biogas from the operation. This removes carbon from the operation which provides a small reduction in the GHG emissions, but the cattle operation loses the benefit of reducing their fossil energy use. Digestion of the manure reduces the amount of manure (digestate) handled on the operation and the carbon returned to the soil receiving the manure nutrients.

Effects on manure effluent

A major benefit from anaerobic digestion of manure is a reduction in the volatile solids content in the effluent. The effluent is normally stored in a tank or basin, the same as that used to store raw manure without digestion. Because of the reduction in volatile solids, the odor and methane produced from this storage is less than that occurring from untreated manure.

The effluent dry matter leaving the digester is reduced to account for volatile solids converted to methane and carbon dioxide:

$$Q_e = Q_m - E_{vs} (Q_{vs}) \quad [3.7]$$

where Q_e = digester effluent dry matter entering long term storage, kg/d

The volatile solids leaving the digester are determined as the amount entering minus that decomposed in the digester. Total volatile solids can be separated into degradable and slow degrading or non degradable fractions. The more degradable volatile solids in the effluent are determined as:

$$VS_d = (B_o / E_{CH4pot} - E_{vs}) Q_{vs} \quad [3.8]$$

where VS_d = degradable volatile solids in effluent, kg/d

B_o = achievable emission of methane during anaerobic digestion, g/kg VS

E_{CH4pot} = potential methane productivity during storage of the manure, g/kg VS

The achievable emission of methane and potential methane productivity are assigned characteristics of the raw manure; typical assigned values are 0.2 and 0.48, respectively ([Sommer et al., 2004](#); see the [Methane Emission](#) section). The slow degrading or non degradable volatile solids in the effluent are determined as:

$$VS_{nd} = (1 - B_o / E_{CH4pot}) Q_{vs} \quad [3.9]$$

where VS_{nd} = nondegradable volatile solids in effluent, kg/d

The remaining volatile solids in the manure control the methane emission rate of the stored digester effluent (see the [Methane Emission](#) section).

The digestion process also affects the nitrogen fractions in the manure. A portion of the organic N in the raw manure is decomposed to TAN. Based upon data collected by [Gooch et al. \(2007\)](#), the amount of TAN in effluent entering long-term storage is modeled as 15% greater than that entering the digester. This increase in TAN potentially increases the ammonia emissions from the storage and field applied effluent (see the [Ammonia Emissions](#) section).

Manure Composting

A routine is used to simulate either a static stack or turned windrow of manure. This compost model simulates processes occurring during the biological decomposition and stabilization of organic matter and the resulting C and N gaseous emissions. These processes include organic C and N microbial decomposition (mineralization), C and N microbial consumption (immobilization), microbial respiration, NH_3 volatilization, nitrification, denitrification, leaching, runoff, and CH_4 fermentation and oxidation. Because of their influence on composting, environmental conditions within the stack or windrow, such as moisture content, temperature, aeration, and oxygen availability, and compost material properties, such as particle density and bulk density, are also modeled ([Figure 3.1](#)). Important equations used are summarized in [Table 3.1](#). A more complete description of the model, refinement of simulation settings, and model evaluation are documented in [Bonifacio et al. \(2017b, 2017c\)](#).

Two simulation profiles are used: (1) a triangular profile, which represents the shape of an actual windrow ([Figure 3.2a](#)), and (2) the equivalent soil profile, which is rectangular-shaped ([Figure 3.2b](#)) as used in modeling croplands and open lots. To simplify the model, dimensions of these two profiles are held constant. Based on published values, the height and width of the triangular profile are set to 1.5 and 3.5 m, respectively. The length is computed as a function of the amount of manure and any added material. The profile is divided into two equal parts ([Figure 3.2a](#)): the inner half, which is triangular-shaped with a height and width of 1.06 and 2.48 m, respectively, and the outer half. This simulation profile is used when modeling aeration within, evaporation from the surface, and heat transfer between the inner and outer halves of the profile. With this set-up, two sets of conditions (i.e., temperature, moisture, and C and N contents) are simulated for each half.

Model routines developed for cropland and open lots (see [Environmental Information, Nitrous oxide](#) section) are adapted to represent several N processes (nitrification, denitrification, leaching, and runoff) for stacks and windrows. A soil equivalent profile is used when modeling these processes. This profile is also divided into two equal layers, each 33.4 cm deep and 3.9 m wide ([Figure 3.2b](#)). The 33.4 cm depth is the thickness of the outer half of the original profile ([Figure 3.2a](#)) whereas the 3.9-m width is based on this depth and half of the original profile's cross-sectional area ($\sim 1.31 \text{ m}^2$). The outer layer is divided into four sublayers with depths of 3.0, 4.5, and 7.5 cm for the three uppermost layers.

Moisture content

The moisture component simulates the processes of precipitation infiltration, runoff, saturated and unsaturated flows, and evaporation. Relationships used to simulate infiltration, runoff, and saturated flows are those used for open lots. A different parameter in simulating unsaturated flows and a new model for evaporation are implemented to better represent stack or windrow conditions. In simulating unsaturated flows, the hydraulic conductivity (K_{hc}) of cattle manure is used. From data of [Sutitarnnontr et al. \(2014\)](#), K_{hc} is computed as a function of moisture content (Equation 3.10). Three stack or windrow configurations are considered: open, roofed, and covered. In simulating evaporation losses for these configurations, particularly for the absence of solar radiation, an evaporation model is used (see next section).

Parameters required to model moisture content include porosity, holding capacity, and saturation moisture content. Saturation is assumed to equal total porosity (PO_{total}), which is a function of dry bulk density (ρ_{dry}) and particle density (ρ_p) (see equation 4 of [Richard et al., 2002](#)). Holding capacity is determined as half of saturation. At the start of composting, ρ_p is initialized at $1,370 \text{ kg/m}^3$ ([Das and Keener, 1997](#)); whereas, initial ρ_{dry} is approximated from initial amounts of manure (i.e., organic + inorganic) and added material, and their corresponding bulk densities. The bulk density for manure organic and inorganic components is set to 175 kg/m^3 based on data of [Larney and Olson \(2006\)](#) and [Hao et al. \(2001\)](#). The density of added material is based on the type selected, with default settings of 135, 135, and 237 kg/m^3 for straw, cornstalks, and sawdust, respectively ([AAFRD, 2005](#); [Rynk et al., 1992](#)). Stack or windrow physical properties, such as ρ_p and ρ_{dry} , change during the simulation as amounts of manure organic and inorganic components decrease while the amount of composted components increases.

Total moisture loss is influenced by changes in water retention characteristics during composting. The raw material can potentially lose all its moisture through unsaturated flow (i.e., to adjacent layers) and evaporation. On the other hand, to represent higher water retention characteristics, the composted material can retain moisture equivalent to 60% of its water holding capacity; below this level, no water is lost through unsaturated flows and evaporation. The moisture content in each layer is limited to a minimum of 15% (wet-basis) to prevent infinite concentrations. For turned windrows, turning evenly redistributes moisture throughout the profile.

Evaporation

Moisture evaporation from stacks or windrows can occur through surface drying and aeration. The potential rate of surface evaporation (E_{sur}) is a function of a water mass transfer coefficient in the gas phase ($K_{g,w}$) and the moisture concentration gradient between the surface and ambient air ([Black et al., 2013](#)) (see Equation 4.33 of the [Animal Housing Emissions](#) section). The $K_{g,w}$ is calculated from a 10-m height effective air velocity and Schmidt number using

a relationship derived from data of [Mackay and Yeun \(1983\)](#) (Equation 3.11). Effective air velocity is set to ambient air velocity for open conditions, half the ambient air velocity when a roof is used, and 0 m/s (i.e., no surface evaporation) with a cover. Using relationships based on [MAC \(2011\)](#), ambient air moisture concentration is estimated from ambient relative humidity (RH); whereas, air moisture concentration at the surface assumes a saturated (100% RH) air layer. Ambient RH is approximated from meteorological inputs (i.e., daily maximum and minimum temperatures, precipitation, wind speed, and solar radiation) and the number of preceding consecutive days without rain using equation 3.12, which was derived using measurements taken at a cattle feedlot in Kansas ([Bonifacio et al., 2011](#)).

In calculating the potential rate of evaporation due to aeration (E_{aer}) (Equation 3.13), air flow through the stack or windrow is modeled in three stages: (1) from ambient air to the outer half, (2) from the outer half to the inner half, and (3) from the inner half to the outer half. For each stage, initial ($MC_{aer,in}$) and final ($MC_{aer,out}$) moisture concentrations of air as it flows through the profile are calculated following the same procedure explained above. In calculating $MC_{aer,out}$, air exiting each half of the stack or windrow is assumed to be at the temperature of that material and saturated. For the first two stages in which the temperature of air flowing through the profile increases, evaporation occurs because more water is required for air to be saturated at a higher temperature (i.e., $MC_{aer,in} < MC_{aer,out}$). For the last stage where air temperature decreases as air flows from the inner to outer half, condensation is modeled (i.e., $MC_{aer,in} > MC_{aer,out}$).

The overall potential evaporation rate is the sum of E_{sur} , E_{aer} for the outer half (stage 1), and E_{aer} for the inner half (stages 2 and 3). However, predicted actual evaporation rate is either equal to or less than the overall potential evaporation rate. Aside from the 15% lower limit for moisture content (wet-basis), a maximum evaporation loss is set equal to the amount of water present in the uppermost 15 cm.

Temperature

Composting has two major phases: active composting and curing ([AAFRD, 2005](#)). Each phase can be further divided into two stages in terms of temperature and microbial activity. For the active composting phase, there are mesophilic and thermophilic stages and for curing, mesophilic and maturation stages ([Cooperband, 2002; Ghazifard et al., 2001](#)). Compost temperature is primarily dependent on simulated microbial activity and the stack or windrow conditions of moisture content, aeration, and remaining material. Temperature prediction involves simulation of: (1) heat generation through microbial activity, (2) heat loss through evaporation and convection, and (3) heat conduction between outer and inner halves.

Similar to bedded pack barns (see [Environmental Information, Nitrous oxide](#) section), relationships for calculating heat generation (Equation 3.14) and heat evaporation loss (Equation 3.15) are adapted from [Cekmecelioglu et al. \(2005\)](#). The amount of C respired needed to calculate heat generation (i.e., C_{CO_2} in Equation 3.14) is based on simulated microbial activity (see C and N Processes section). Heat convection loss is calculated following [Liang et al. \(2004\)](#) (Equation 3.16). Heat conduction between the outer and inner halves is a function of their temperature difference and thermal conductivity (k_w) (Equation 3.17), with k_w calculated from the overall moisture content of the composting material using a relationship from [Sutitarnnontr et al. \(2014\)](#).

To simulate turning, the temperature of the whole windrow is set to that of ambient air. Based on findings from previous cattle manure compost studies ([Robin et al., 2002; Robinson et al. 2000](#)), no heat evaporation loss from the inner windrow is modeled until its temperature reaches 40°C, the defined starting temperature for the active thermophilic stage.

Oxygen and aeration

As an aerobic process, composting requires a continuous and sufficient supply of oxygen for microbial consumption. Depending on the type of composting, oxygen can be provided through natural convection and mechanical aeration for static piles and natural convection and turning for turned windrows. The routine simulating air entering the stack or windrow is composed of two components. The first component is for the amount of air added through turning, which we assume is equal to the volume of air-filled pore space (V_{afps}) calculated as the product of the volume and air-filled porosity (PO_{air}). The value of PO_{air} is a function of ρ_{dry} and moisture content ([Richard et al., 2002](#)).

The second component is for the air added through natural convection driven by a temperature gradient. This component is adapted from aeration models by [Richard et al. \(2004\)](#) and [Yu et al. \(2008\)](#) for cylindrical composting bioreactors. In addition to those made by [Yu et al. \(2008\)](#), additional assumptions were applied when modeling air flow through the windrow profile: (1) both ambient air enters and exhaust air exits at any given point on the outer surface, (2) air flow direction has no effect on processes such as water evaporation and heat convection, and (3) air velocity throughout the pile is constant. Based on the simulation profile used ([Figure 3.2a](#)), the volume of air passing through the inner half is driven by the temperature gradient between the outer and inner halves. Total air passing through the outer half is driven by the temperature gradient between the outer half and ambient air plus the inner aeration. For each half, daily aeration (V_{aer}) is a function of PO_{air} , surface area (A_w), compost material permeability (K_p), air density and

viscosity (i.e., both held constant), and the temperature gradient (Equation 3.18) (Yu et al., 2008). The value of A_w is a function of the length of the stack or windrow. The K_p is a function of PO_{air} , effective particle size (d_p), and the Ergun viscous component constant (Ergun viscous component constant (A) is approximated using figure 6 of Richard et al. (2004). Through refinement using Larney and Olson (2006) data, A is set to 60. With changes in ρ_p and ρ_{dry} and their effects on PO_{air} simulated (see Compost Physical Properties section), effects of compaction on aeration is not included.

The amount of oxygen added is computed from the simulated air volume (i.e., V_{aer} for turning, V_{afps} for aeration) and temperature (i.e., compost temperature for turning, ambient air temperature for aeration) using the Ideal Gas Law. In the calculations, an atmospheric air molecular weight of 28.85 kg/kmol and an oxygen weight fraction of 0.23 are used. With V_{aer} (Equation 3.18) much greater than V_{afps} , most of the oxygen in the stack or windrow is simulated through natural convection rather than turning.

Microbial decomposition, consumption, and respiration

Figure 3.3 illustrates the association and integration of the different C and N processes simulated for compost stacks or windrows. Modeling of each process and tracking of different C and N forms are performed for each defined layer (i.e., four upper sublayers and one lower layer) using the equivalent soil profile (Figure 3.2b). Organic, mineralized, and microbial C and N forms are evenly redistributed throughout the profile when turning occurs.

Relationships for simulating microbial decomposition, microbial consumption, and respiration for stacks and windrows were adapted from numerical studies on composting by Cekmecelioglu et al. (2005) and Liang et al. (2004). For each layer, organic C required for microbial decomposition is from both manure and added material while N is from manure. The different organic C forms in both manure and added material are discussed in the Compost Physical Properties section below. The total amount of organic C that decomposes within a day (C_{decomp}) is a function of the total organic C available (manure C + added material C), microbial decomposition rate (K_{decomp}) (i.e., assuming the same rate for manure and added material), a moisture content factor ($F_{m,decomp}$), and an anaerobicity factor (anaerobicity factor ($F_{anaerob}$) (Equation 3.19). The $F_{m,decomp}$, which has a value from 0.0 to 1.0, is based on Liang et al. (2004). Also ranging from 0.0 to 1.0, $F_{anaerob}$ is based on the oxygen concentration correction factor presented by Richard et al. (2006) with the half-saturation constant for oxygen set to 0.02 (Haug, 1993).

Patterned after the multi-factorial kinetic model derived by Richard (1997), K_{decomp} is a function of maximum decomposition rate ($K_{d,max}$), decomposition rate for the slow fraction ($K_{d,slow}$), number of days from the start of composting or last turning event (t), lag time in days (τ), and a first-order decay coefficient (k_{decay}) (Equation 3.20). Both $K_{d,max}$ and $K_{d,slow}$ are calculated using the model by Haug (1993) modified to have a maximum growth rate of microorganisms, and thus maximum decomposition, at 60°C (Equation 3.21). The $K_{d,slow}$ is calculated using the compost temperature (T_w in equation 3.21) while $K_{d,max}$ uses the temperature for maximum decomposition (60°C). Through refinement (Bonifacio et al., 2017c), τ is set to 2 days, k_{decay} to 0.10 per day, and x_l (in Equation 3.21) to 2.37×10^{-3} (dimensionless).

Manure organic N that decomposes within a day (N_{decomp}) is calculated from the manure component of C_{decomp} . As applied to open lot and bedded pack barn models, a manure carbon-to-nitrogen (C/N) ratio of 15 is used. Aside from N_{decomp} , other forms of N available for microbial consumption are ammonium N (NH_4^+ -N) and nitrate N (NO_3^- -N). Through refinement using data by Larney and Olson (2006), which indicated low NO_3^- -N profiles for both static stacks and turned windrows throughout composting, NO_3^- -N is treated as the primary N source over N_{decomp} and NH_4^+ -N. Evaluation also showed that whichever N (i.e., N_{decomp} or NH_4^+ -N) follows NO_3^- -N as the next N source is not critical.

Two important parameters in composting are the N availability and the C/N ratio requirement ($(C/N)_{req}$) for composting microorganisms. There are two major decomposition scenarios with respect to N availability: with and without organic N. In the first scenario, C decomposition is not limited by N availability and there is always N_{decomp} being added to the NH_4^+ -N pool depending on NO_3^- -N available and $(C/N)_{req}$. In the second scenario, C decomposition is controlled by the total mineralized N (NO_3^- -N, NH_4^+ -N) present and $(C/N)_{req}$. If not enough mineralized N is available, C decomposition is limited, with organic C from the dry material as the last to decompose.

The $(C/N)_{req}$ for mesophilic ($< 40^\circ\text{C}$) and thermophilic ($\geq 40^\circ\text{C}$) stages of composting are set to 25 and 50, respectively (Shaffer et al., 1991; Horwath and Elliot, 1996). Some of the decomposed C becomes part of microbial biomass with the rest respired as CO_2 . Assuming a C/N ratio of 6 for microbial biomass (Williamson et al., 2003), 88% and 76% of C decomposed during thermophilic and mesophilic stages of composting, respectively, are converted to CO_2 through microbial respiration. Per mole of CO_2 formed, 0.8 mole of oxygen is consumed (Richard et al., 2006) and 0.9 mole of water is generated (Stombaugh and Nokes, 1996).

Nitrification, denitrification, nitrate movement, and nitrogen runoff

Similar to cropland and animal housing (open lots and bedded pack barns), simulation of nitrification, denitrification, and leaching for stacks and windrows are based on DayCent (2007) and nitrogen runoff on

the Soil and Water Assessment Tool (SWAT) ([Neitsch et al., 2005](#)). Through refinement ([Bonifacio et al., 2016a and 2016b](#)), several changes were made to adapt the routines for stacks and windrow. For nitrification, the maximum fraction of available total ammoniacal N ($TAN = NH_4^+-N + NH_3-N$) that can be nitrified each day (K_{max}) is set to 0.27. Temperature effect on nitrification (F_{temp}) is calculated using a Poisson density equation. Compared to that for soils ([DayCent, 2007](#)), F_{temp} for composting was adjusted to have a wider range of temperature with higher nitrification rates. This enables the model to simulate a continuous decrease in NH_4^+-N concentration even at temperatures greater than 30°C. Also, if a layer enters the anaerobic phase (i.e., oxygen concentration after microbial decomposition < 5%; [AAFRD, 2005](#)), nitrification ceases in that layer.

Two revisions were made in implementing the denitrification model for compost, with the modified form given by equation 3.22. The first revision was to neglect the factor representing C availability ($F_d(CO_2)$) in equation 2 of [Del Grosso et al. \(2000\)](#) as C would always be in excess (i.e., $C/N > 20$). With predicted air flow (Equation 3.18) and oxygen availability, the second revision was to replace the moisture-based factor in the original model with an oxygen-based factor (F_{d,O_2}) (Equation 3.22), defined as 1.0 minus $F_{anaerob}$. With this parameter, denitrification rate is a function of oxygen availability, with the highest rate for anaerobic conditions and negligible for ambient-level oxygen conditions.

The NO_3^- -N leaching model for cropland and animal housing is implemented for compost stacks or windrows with the following conditions: (1) an impermeable working surface is assumed so no NO_3^- -N leaches into the soil below, and (2) the outer windrow is treated as four sublayers; whereas, the inner is one layer when representing NO_3^- -N movement within the profile.

Similar to modeling runoff from croplands, NO_3^- -N runoff for stacks and windrows is simulated using relationships from the Soil and Water Assessment Tool (SWAT) ([Neitsch et al., 2005](#)). However, organic N runoff is currently not modeled and prediction of NH_4^+-N runoff is not feasible.

Ammonia volatilization

Ammonia (NH_3) is exhausted to the atmosphere through aeration and turning. As in the numerical model of [Liang et al. \(2004\)](#), NH_3 emission rate due to aeration is a function of the Henry's law constant for NH_3 (H), the difference in aqueous phase NH_3 concentrations between adjacent outer ($C_{NH_3,out}$) and inner ($C_{NH_3,in}$) layers, and hourly aeration rate ($V_{aer}/24$) (Equation 3.23). Calculation of NH_3 emission is done on an hourly time step and for each layer ([Figure 3.2b](#)). Parameters H and C_{NH_3} are calculated using Equations 4.8 and 4.15, respectively. In calculating C_{NH_3} , pH of compost material is constant at 8.0 based on measurements by [Larney and Olson \(2006\)](#). Hourly aeration passing through each simulated layer is dependent on its position in the profile where the outermost sublayer of the outer half has the highest aeration and the inner half has the lowest aeration (see Oxygen and Aeration section). The NH_3 emission rate due to turning is computed in a similar way except that the volume of air-filled pores is used instead of hourly aeration (Equation 3.24) and calculation is done on a per turning basis. Similar to other NH_3 sources (see [Environmental Information, Ammonia Emission](#) section), ambient air NH_3 concentration is assumed negligible. As in open lots, steady-state conditions are applied. Effects of NH_4^+-N sorption, however, are neglected due to lack of appropriate values for parameters such as the sorption linear partitioning coefficient for compost materials.

Methane emissions

During composting, CH_4 may form under anaerobic conditions due to fermentation of available C. In our model, C lost as CH_4 can only come from CO_2 -C. This assumption is used to agree with trends reported by [Hao et al. \(2001\)](#) for both static and turned windrows. Two processes associated with CH_4 emission are simulated for each layer on a daily time-step: CH_4 fermentation, which converts CO_2 -C to CH_4 -C, and CH_4 oxidation, which oxidizes CH_4 -C to CO_2 -C ([Figure 3.3](#)). The CH_4 -C fermentation rate is a function of the amount of CO_2 -C, the maximum fraction of CO_2 -C that can be converted to CH_4 -C (K_{CH_4}), and a temperature factor ($F_{t,ferm}$) (Equation 3.25). The $F_{t,ferm}$ is calculated using relationships from Manure-DNDC, with the maximum production rate at 30°C ([Li et al., 2012](#)). The K_{CH_4} is set to 0.075 ([Bonifacio et al., 7c](#)). The CH_4 -C oxidation rate is a function of available CH_4 -C, and factors for moisture content (F_{m,CH_4}), temperature ($F_{t,oxid}$), oxygen concentration ($F_{anaerob}$), and air velocity within the pile (F_{vel}) (Equation 3.26). Values for F_{m,CH_4} and $F_{t,oxid}$ are computed using relationships from [Parton et al. \(1996\)](#), revised to have the highest CH_4 oxidation at a dry-basis moisture content of 15% and within a 25 to 30°C temperature range ([Stein and Hettiaratchi, 2001](#)). As mentioned, $F_{anaerob}$ is computed following [Richard et al. \(2006\)](#). Using the measured CH_4 -C emission data of [Hao et al. \(2001\)](#), an equation for F_{vel} was developed based on air velocities simulated by the model (i.e., calculated from V_{aer} and PO_{air}). Based on F_{vel} , 99% of CH_4 -C is available for oxidation at air velocities equal to or less than 0.2 m/h (0.06 mm/s) while no CH_4 -C is oxidized at air velocities equal to or greater than 0.5 m/h (0.14 mm/s).

Compost physical properties

Simulation of changes in physical properties of the compost material are calculated on a daily basis. The ρ_p is calculated as a function of percentages of raw and composted components, with individual particle densities of 1,370

kg/m³ for raw material ([Das and Keener, 1997](#)) and 2,300 kg/m³ for composted material ([Weindorf and Wittie, 2003](#)) (Equation 3.27). Similarly, ρ_{dry} is adjusted to account for conversion of some raw materials to microbial biomass. The following assumptions are applied for microbial biomass: (1) a molecular formula of C₆H₁₁O₂N ([Kling, 2010](#)) and (2) use of 2,300 kg/m³ in approximating its contribution to total volume.

Aside from simulating raw material conversion to microbial biomass, calculation of both ρ_p and ρ_{dry} requires simulation of dry matter losses. Total dry matter loss is the sum of C, N, H, and O losses. Other losses (e.g., sulfide, phosphorus) are assumed to be negligible. Calculation for C and N losses is based on predicted gaseous emissions.

For H and O, estimation of corresponding losses is more complex. Instead of tracking all H and O present in the stack or windrow (i.e., H and O from rain, added moisture and generated water; O from aeration), only that in the manure and dry material are needed to predict dry matter losses. The amounts of dry matter H and O lost during composting are approximated from C_{decomp} . The percentage losses of H and O for different organic C compounds (for both thermophilic and mesophilic stages) are presented in [Table 3.2](#). The types of organic C compounds included in the simulation (i.e., manure characterization by [Liao et al., 2007](#)), and the sequence of C consumption ([Epstein, 1997](#)) are as follows: sugar, starch, protein, hemicellulose, cellulose, and lignin. The H and O percentage losses in [Table 3.2](#) are based on decomposition reactions derived using the assumed molecular formula for microbial biomass (C₆H₁₁O₂N) and percentages of C_{decomp} respired during the thermophilic (85%) and mesophilic (76%) stages of composting. Also, among the organic C compounds simulated, only protein contains N ([Table 3.2](#)). Through refinement using data by [Larney and Olson \(2006\)](#), a 25% protein N loss setting, equivalent to 75% conversion of protein N to microbial N, is assumed in the simulation.

Ammonia Emissions

Research over the past century has developed a good understanding of how volatile compounds in solution form, migrate, react, and ultimately volatilize to the atmosphere. Mathematical models have been developed and validated that accurately represent these processes. Through adaptation of these relationships, emissions such as ammonia from manure can be predicted for livestock farming systems. Predicted emissions from each important source are summed to determine the total farm emission.

Formation and Emission Processes

Total manure *N* consists of organic *N* and ammoniacal *N* (See the [Herd](#) section) where only the ammoniacal form is readily volatilized during manure handling. Immediately upon excretion, about 95% of cattle manure *N* is in an organic form ([Muck, 1982](#)). Depending on how the cattle are fed, about 40-50% of this organic *N* is in the form of urea excreted in urine ([Nennich et al., 2006](#)). Excess protein *N* fed to cattle generally ends up in the urine, increasing the concentration of urea in the manure mixture of feces and urine. The primary source of ammoniacal *N* in manure is through the transformation of urea by the urease enzyme present in the feces. A portion of the organic fecal *N* can also transform to ammoniacal *N* during extended storage periods.

Immediately following excretion, ammonia emission from a manure surface involves five important processes: urea hydrolysis, dissociation, diffusion, aqueous-gas partitioning, and mass transport away from the manure surface to the atmosphere. Upon excretion, urea comes in contact with urease enzymes present in feces or on floor and soil surfaces. Enzymatic hydrolysis quickly decomposes the urea to aqueous un-ionized ammonia, *NH*₃ (*aq*), as shown in Reaction (4.1) ([Mobley and Hausinger, 1989](#)).



In solution, *NH*₃ (*aq*) exists in equilibrium with ammonium, *NH*₄⁺, as shown in Reaction (4.2).



The sum of *NH*₃ (*aq*) and *NH*₄⁺ is referred to as total ammoniacal *N* or *TAN*.

The rate of urea hydrolysis is dependent on temperature, pH, and the concentration of urea in the manure solution. [Muck \(1982\)](#) found that over 95% of the urea in cattle manure decomposed within 6 h of excretion at 30°C and within 24 h at 10°C. Therefore, up to 50% of the total *N* excreted (all of the urea *N*) can be transformed to *TAN* in the housing facility when manure is removed once a day or less frequently. [Muck \(1982\)](#) found that Michaelis-Menten kinetics provided a model to describe the degradation of urea by the urease present in feces. The maximum reaction velocity (V_{max}) and the Michaelis-Menten coefficient (K_{mc}) increased with temperature between 10 and 40°C, and the activity decreased linearly on both sides of a pH range of 6.8 to 7.6. Since the pH of fresh cattle manure normally falls within an optimum range for urease activity ([Sommer et al, 2006](#)), pH has little influence in this model.

The transformation of urea to *TAN* is modeled on an hourly time step as a function of temperature and urea

concentration in manure ([Muck, 1982](#)):

$$RUC = V_{max} C_U / (K_{mc} + C_U) \quad [4.3]$$

where RUC = rate of urea transformation to TAN via Eq. (1), $\text{kg/m}^3\text{-h}$

C_U = urea concentration in urine, kg/m^3

V_{max} = maximum rate of urea conversion, $\text{kg N/m}^3 \text{ wet feces-h}$

$$= 3.915 \times 10^9 e^{-6463/T} \quad [4.4]$$

K_{mc} = Michaelis-Menten coefficient, $\text{kg N/m}^3 \text{ mixture}$

$$= 3.371 \times 10^8 e^{(-5914/T)} \quad [4.5]$$

T = temperature, K

The distribution of TAN between ammonia (NH_3) and ammonium (NH_4^+) in a solution such as manure, i.e. TAN dissociation, is modeled using thermodynamic equilibrium principles ([Stumm and Morgan, 1996](#)). The ammonia fraction of TAN in a manure solution is a function of pH and a dissociation constant (K_a) that increases exponentially with temperature (Montes et al., 2009):

$$F = 1 / (1 + 10^{-pH} / K_a) \quad [4.6]$$

where $K_a = 10^{(0.05 - 2788/T)}$

pH = surface pH of manure or urine

[4.7]

Therefore, ammonia formation is very sensitive to pH and temperature. Below pH 8, a one unit increase in pH increases the ammonia fraction by about an order of magnitude, and this fraction approximately doubles with each 10°C increase in temperature. As the ammonia fraction in a solution increases, the potential emission rate increases.

Henry's Law relates the ammonia in a solution to that in a gas phase equilibrium with the solution. The Henry's Law constant, defined as the ratio of ammonia concentration in a solution in equilibrium with gaseous ammonia concentration in air, is exponentially related to temperature. A number of equations have been used to represent this relationship with a wide range in predicted values ([Montes et al., 2009](#); [Ni, 1999](#)). A model developed by [Montes et al. \(2009\)](#) based upon thermodynamic principles is used:

$$H = (T/0.2138) \times 10^{(1825/T - 6.123)} \quad [4.8]$$

where H = Henry's Law constant for ammonia, dimensionless aqueous:gas.

Because ammonia concentration is so sensitive to pH, knowing the pH at the surface of the manure is critical for accurate prediction of emission rate. Surface pH is difficult to measure and model. When manure is exposed to air, dissolved carbon dioxide is released more rapidly than ammonia due to a lower solubility. The rapid loss of carbon dioxide leads to an increase in manure surface pH, while the pH of the bulk of the manure remains relatively constant ([Montes et al., 2009](#); [Sommer et al., 2006](#); [Blanes-Vidal et al., 2009](#)). Measurements and model predictions of manure pH suggest that surface pH may be on the order of 0.5 to more than 1.0 pH unit greater than the bulk pH ([Chaoui et al., 2009](#); [Ni et al., 2009](#); [Blanes-Vidal et al., 2009](#); [Montes et al., 2009](#)). The magnitude of the pH increase is expected to depend on solution chemistry, manure depth, and environmental properties. On a barn floor with constant animal movement, there is continuous mixing of the manure, so the surface pH likely varies across a manure covered floor surface.

Equations 4.7 and 4.8 represent ammonia formation in an infinitely dilute solution. For a substance such as manure, ions in the solution affect the equilibrium of NH_3 and NH_4^+ and thus the overall emission rate. In this mixed electrolyte solution, the interaction with other ions affects chemical activity. This effect can be estimated from the concentrations of these species in solution multiplied by their corresponding activity coefficients where the activity coefficients are a function of ionic strength ([Montes et al., 2009](#)). Ionic strength in cattle manure depends on manure composition and DM content, but is fixed at 0.35 in our model ([Chaoui et al. 2009](#)), which gives an activity coefficient of 0.74 for NH_4^+ , based on the Davies equation ([Montes et al., 2009](#)). Since NH_3 has no charge, its activity coefficient will be close to 1.0. To account activity corrections, K_a from equation 4.7 is multiplied by 0.74.

The movement of ammonia away from the manure surface into the surrounding atmosphere is described in the model using a mass transfer coefficient (Eq. 4.14). The rate of transfer is a function of the air velocity over the surface, temperature of the manure and air, and the geometry of the surface in relation to air movement ([Montes et al., 2009](#)). A number of empirical relationships have been used to predict ammonia transfer from manure ([Ni, 1999](#)), but most are based on conditions different from that of a flat manure covered surface ([Montes et al., 2009](#)).

Principles are again well established for deriving the mass transfer coefficient based upon a two film model and the properties of the emitted compound and air as the transfer media ([Montes et al., 2009](#)). In our model, the mass transfer coefficient is a function of the air friction velocity and the Schmidt number ([Mackay and Yeun, 1983](#)):

$$K_g = 0.001 + 0.0462 U (SC^{-0.67}) \quad [4.9]$$

where K_g = mass transfer coefficient through gaseous layer, m/s

U = air friction velocity near surface, m/s

$$= 0.02 V_a^{1.5} \quad [4.10]$$

V_a = ambient air velocity measured at a standard anemometer height of 10 m

SC = Schmidt number ([Perry et al., 1997](#)), dimensionless

From the review by [Ni \(1999\)](#), the mass transfer coefficient through the liquid film layer (K_l) is modeled as:

$$K_l = 1.417 \times 10^{-12} T^4 \quad [4.11]$$

This coefficient has relatively little effect on the mass transfer of ammonia.

A remaining process that must be considered is mass transfer of *TAN* within the bulk material below the liquid film. For manure in a thin layer, such as on a free stall barn floor, this process is assumed to not limit emission and is thus neglected. In a large volume of manure such as in a storage tank, aqueous phase mass transfer within the tank becomes important. As the ammonia is emitted, there is a drop in the concentration of *TAN* at the surface. This forms a gradient in concentration from the bulk material to the surface, and the *TAN* migrates from the high concentration at lower depths toward the lower concentration at the surface. The rate of this migration is dependent on the distance *TAN* migrates and the degree of mixing of the manure. With no mixing, *TAN* will move by diffusion only, leading to a low rate of migration. With mixing due to manure addition, wind, or temperature gradients, migration is more accurately described as convection, and can be much greater than that by diffusion ([Cussler, 1997; Incropera, 2006](#)). This effect is modeled as a resistance to mass transfer which is the sum of the resistance to movement through the manure and the resistance of any cover material over the manure:

$$R_m = R_s + R_c \quad [4.12]$$

where R_m = resistance to mass transfer, s/m

R_s = resistance to mass transfer through the manure, s/m

R_c = resistance to mass transfer through a storage cover, s/m

The overall mass transfer coefficient is the reciprocal of the sum of the three resistances to mass transfer:

$$K = 1 / (H / K_g + 1/K_l + R_m) \quad [4.13]$$

The hourly rate of emission is then a function of the overall mass transfer rate and the difference in ammonia concentration between the manure and surrounding atmosphere:

$$J = 3600 K (C_m - H(C_a)) \quad [4.14]$$

where J = ammonia flux, kg/m²-s

C_m = concentration of ammonia in manure, kg/m³

C_a = concentration of ammonia in ambient air, kg/m³

Ammonia concentration in the ambient air is assumed to be negligible, and is thus set to zero. The ammonia concentration in the manure is calculated from the bulk *TAN* concentration and F from Eq. 4.6.

$$C_m = F \times C_{TAN} \quad [4.15]$$

where C_{TAN} = concentration of *TAN* in the manure solution, kg/m³

By linking models for the emission processes, emission rates are predicted for each of the major ammonia sources on farms. The four sources are housing facilities, manure storage, field applied manure, and direct deposits on pasture. The principles and relationships described above are used to predict emissions from each with some differences as described in the following sections.

Animal Housing

A major difference among housing facilities is the area soiled by the manure. As manure is spread over more area,

the ammonia emission rate per animal increases. Exposed manure surface area is set considering typical designs for cattle housing. The soiled areas assigned to tie stall and free stall facilities are 1.2 and 3.5 m² per cow, respectively. For growing animals, the areas are 1.0 and 2.5 m² per animal. These areas are fixed for the duration of a simulation.

Free Stall and Tie Stall Barns

The mass of N on the floor of the housing facility is a function of the time animals spend in the facility, the amount excreted, the manure removal rate, and rates of urea hydrolysis and ammonia emission. These processes occur simultaneously in our model with a fixed time step of one hour. During the day, urea N accumulates in proportion to time and the excretion rate. When animals spend a portion of their time on pasture, the amount of manure deposited in the housing facility is proportional to their time in that facility. Urine and fecal production and N excretion are functions of animal size, feed intake, protein intake, and milk production (See the [Herd](#) section). The amount of urea N excreted is set at 70% of the total urine N and 9% of the fecal N with 1% of the urine N excreted as ammoniacal N ([Bristow et al., 1992, Rotz, 2004](#)). All remaining N is in a more stable organic form that does not affect emissions from the housing facility. Removal rate is a function of housing type. Removal factors, or the fraction of the manure removed each day are 0.98, 0.98, 0.9 and 0.0 for tie stall, flushed free stall, scraped free stall, and bedded pack facilities, respectively. The portion not removed remains on the exposed surface where emissions can continue. As the urea accumulates, the rate of urea N conversion to TAN is determined using equation 4.3, and the TAN emission rate is predicted using equations 4.6 to 4.15. Emission rates are determined separately for the lactating cow and growing animal facilities due to differences in manure excretion, composition, and management.

When manure is removed by flushing, three parameters are adjusted to account for differences compared to scraped manure. Following a scraping operation, a very thin layer of manure is spread over the surface. This causes increased carbon dioxide emission, which increases surface pH. Following flushing, a cleaner and wetter floor surface follows that removes this effect on surface pH. This is modeled by setting the surface pH equal to that of the bulk manure pH for the first hour following flushing. As noted above, the removal factor is also increased to 0.98 to represent a cleaner floor immediately following removal. The third factor is that the urinary N deposited following flushing is diluted by increasing the volume of solution on the floor by 20%.

Important parameters for predicting housing emissions are temperature, air velocity, and manure pH. For naturally ventilated facilities, temperature is set to that of the ambient air. For enclosed, mechanically ventilated barns, air temperature in the barn is modified as a function of the ambient air temperature:

$$T = \max(-5.0, 0.63 T_a + 6.0) \quad [4.16]$$

where T_a = ambient air temperature, °C

Hourly temperatures are estimated from daily maximum and minimum temperatures using a hyperbolic tangent fitting algorithm ([USAF, 1991](#)):

$$T_a = H_x(T_{max} - T_{min})/2 + (T_{max} + T_{min})/2 \quad [4.17]$$

$$\text{where } H_x = -\tanh((H + 3.5)/3.5) \quad \text{for } H \leq 4 \quad [4.18]$$

$$H_x = \tanh((H - 9.5)/2.5) \quad \text{for } 4 < H \leq 14$$

$$H_x = -\tanh((H - 21.5)/3.5) \quad \text{for } H > 14$$

H = hour of the day from 1 to 24

For bedded pack facilities, the air speed near the manure surface is set equal to the ambient wind speed. For naturally ventilated barns, this speed is set at half the ambient wind speed. For mechanically ventilated barns, the air velocity in the barn (V_a) is determined as a function of ambient temperature with an increase in ventilation rate as temperature increases:

$$V_a = \max(0.3, 0.1 T_a) \quad [4.19]$$

where V_a = air velocity in barn, m/s

As described above, manure pH is influenced by the characteristics of the manure and environmental conditions. The pH of excreted cattle manure is about 7 for feces and 8 for urine. The mixture has a pH of about 7.5, which is assumed to be the bulk pH of the manure laying on the floor or in the bedded pack. Since the ammonia concentration at the surface controls emission rate, the pH at the surface is most important. Based upon experimental data ([Chaoui et al., 2009; Ni et al., 2009; Blanes-Vidal et al., 2009](#)), the surface pH for manure in all housing facilities is set 0.7 units greater than the average bulk pH of the excreted manure.

Hourly emissions from each animal facility are totaled to obtain a daily emission. For barns where manure is removed on a daily basis, the mass of *TAN* removed is all urea and ammoniacal *N* in the excreted manure minus the *TAN* emitted during the day. This provides the mass placed into storage or that applied to fields through a daily application strategy.

Open Lots

For open lot facilities, the exposed manure surface area is based on typical animal densities for dairy operations. An animal density of 60 m² per head is assigned to represent the surface areas for dairy open lots. This area is fixed for the duration of a simulation.

The mass of *N* on the open lot is a function of the amount of urine excreted, the time spent by animals on open lots, and manure pack conditions, such as moisture content and the amount of organic matter present (see [Nitrous Oxide](#) section). For open lots, effects of processes such as urine infiltration and ammonium adsorption on ammonia emissions are considered. These processes are modeled simultaneously on an hourly time step.

For open lot facilities, manure harvesting is normally done after months of operation. Until the manure pack is harvested, organic forms of *N* in the urine excreted can undergo decomposition into urea *N* or other forms of *N* that can transform into ammoniacal *N* ([Bristow et al., 1992](#)). Depending on soil/manure temperature, open lots have the capacity to hydrolyze all urea *N* due to urease activities in both fresh and non-fresh manure areas. As stated previously, over 95% of urea decomposed within 6 h at 30°C and within 24 h at 10°C ([Muck, 1982](#)). Assuming a manure *N* content of 7 g *N*/kg feces for cattle manure ([Lorimor et al., 2000](#)), an expression is derived for estimating the fraction of urine *N* (urea *N*, ammoniacal *N* and other organic *N*) excreted on open lots that hydrolyzes within 24 h:

$$F_{ur} = \min(1, 0.4232 e^{0.0901T_{s,avg}}) \quad [4.20]$$

where F_{ur} = fraction of urine *N* that hydrolyzed, 0.0 to 1.0

$T_{s,avg}$ = daily average manure temperature, °C

Applying equation 4.20, all urine *N* hydrolyzes within 24 h at manure temperatures above 10°C. Below 10°C, the fraction of urine *N* that hydrolyzes within 24 h decreases exponentially with manure temperature. The daily average manure temperature is the average of daily maximum and minimum manure temperatures approximated using relationships presented by [Parton \(1984\)](#).

When excreted on the open lot, a portion of the urine infiltrates the manure pack while the remaining stays on or near the surface and becomes available for ammonia volatilization. The degree of urine infiltration depends on the moisture content of the manure pack. A dry manure pack has a capacity to hold more moisture and thus leads to greater infiltration whereas a wet manure pack will not hold much additional moisture reducing infiltration. The fraction of urine infiltrating into the manure pack (*IR*) is computed as a function of the runoff curve number (*CN*):

$$IR = 1 - CN/100 \quad [4.21]$$

For open lots, *CN* is computed daily and estimated from the initial abstraction of the manure pack ([USDA, 2005](#)). As initial abstraction is the amount of moisture needed to exceed field capacity ([Dahlke et al., 2012](#)), the initial abstraction (I_a) for the manure pack on open lots is:

$$I_a = \max(0, FC - MC) D \quad [4.22]$$

where FC = field water holding capacity of the manure pack, cm H₂O/cm soil

MC = water content of the manure pack, cm H₂O/cm soil

D = depth of the manure pack, 5 cm

CN is then calculated from I_a using:

$$CN = 36.486 I_a^2 - 89.571 I_a + 96.895 \quad [4.23]$$

A regression equation derived using I_a - *CN* values presented in Table 2-4 of the Engineering Field Handbook ([USDA, 2012](#)).

The moisture content of the manure pack is predicted using a soil water model adapted from relationships described by [Jones and Kiniry \(1986\)](#). Moisture is predicted in layers considering the water entering (i.e., precipitation minus runoff, urine), moving through (i.e., moisture flow among the soil layers) and leaving the manure pack or soil profile (i.e., evaporation and leaching). The open lot soil profile is modeled in four layers, with the top 3 layers of 3.0- (surface), 4.5- and 7.5-cm depths representing the manure pack and a fourth layer with 100-cm depth representing the underlying soil. Prediction of the moisture content requires several parameters such as porosity, field capacity and saturation

moisture content. In calculating the total porosity for open lots, a particle density of 1.89 g/cm³ ([Pepple et al., 2011](#)) and bulk density of 1.7 g/cm³ ([Mielke et al., 1974](#)) are used. Equations developed for calculating field capacity and saturation moisture content for open lots are:

$$SAT = PO + 0.4 OM_{mp} \quad [4.24]$$

$$FC = 0.5 SAT \quad [4.25]$$

where SAT = water content at saturation, cm H₂O/cm soil

FC = water content at the drained upper limit, cm H₂O/cm soil

PO = porosity, fraction

OM_{mp} = organic matter content of the manure pack, fraction

Stage 2 water evaporation ([Ritchie, 1972](#)) starts at a water-filled pore space of 30%, which is under dry/near dry conditions for feedyard soils ([Razote et al., 2006](#)).

As manure lays on the open lot until removal, ammonia can be emitted from fresh and non-fresh manure areas. Hourly ammonia emission rates from fresh manure are determined using equations 4.6 to 4.11 and 4.13 to 4.15, with the resistance to mass transfer (R_m in equation 4.13) equal to the inverse of the manure pack's hydraulic conductivity (equations 4.28 to 4.30). The same equations are used in estimating hourly ammonia emission rates from non-fresh manure areas. However, instead of using equation 4.6, ammonium adsorption is considered in calculating the ammonia fraction in TAN for non-fresh manure areas due to its higher degree of organic matter decomposition. As organic matter decomposes, the adsorption capacity of the manure pack increases ([Bernard et al., 2009; Waldrip et al., 2012](#)), which then gives more sites to adsorb cations that can include ammonium. The ammonia fraction in TAN (F) is computed by:

$$F = 1 / [1 + (10^{-pH_f}/K_a) + (K_f C_s 10^{-pH_n}/K_a)] \quad [4.26]$$

where K_a = dissociation constant, computed using equation 4.7

pH_f = pH of fresh manure, 8.0

pH_n = pH of non-fresh manure, 7.5

K_f = reference linear partitioning coefficient for ammonium adsorption
= 10 L/kg ([Waldrip et al., 2012](#))

C_s = concentration of solids available for ammonium adsorption, kg solids/L

An equation for predicting C_s is derived using the manure pack characteristics reported in previous studies ([Mielke et al., 1974; Razote et al., 2006](#)):

$$C_s = [(OM + F_{clay})/OM_{ref}] (\rho_{s,avg}/WFP) \quad [4.27]$$

where OM = organic matter content of the manure pack, fraction, 0.38

F_{clay} = clay content of the manure pack, fraction, 0.06

OM_{ref} = organic matter content at which K_f was measured, 0.70

$\rho_{s,avg}$ = average density of the whole manure pack layer, 1.25 g/cm³

WFP = water-filled pore space of the manure pack, fraction

Important parameters for predicting ammonia emissions from open lots are air velocity, temperature of the manure pack, and mass transfer resistance through the manure pack. Hourly manure pack temperatures are estimated from daily maximum and minimum manure temperatures calculated using relationships presented by [Parton \(1984\)](#). Effects of solar radiation on the manure pack temperature is accounted for in the daily maximum manure temperature computation. Similar to hourly ambient air temperatures, hourly manure temperatures are calculated from daily maximum and minimum values using a hyperbolic tangent fitting algorithm ([USAF, 1991](#)) (equations 4.17 to 4.18).

The resistance to mass transfer in the soil is the inverse of its hydraulic conductivity ([SSDS, 1993](#)). For fresh manure, the mass transfer resistance is based on its saturated hydraulic conductivity assuming that fresh manure is at 100% saturation. For non-fresh manure areas, the mass transfer resistance is based on its unsaturated hydraulic conductivity to account for effects of lower moisture on the flow of ammonia solution through the manure pack. The saturated hydraulic conductivity is estimated from the clay and silt contents using the relationship ($R^2 = 0.95$) derived by [Delgado-Rodriguez et al. \(2011\)](#):

$$K_{hc,sat} = 0.101176 FINES^{-1.62}/(24 \times 3600) \quad [4.28]$$

where $K_{hc,sat}$ = saturated hydraulic conductivity, m/s

$FINES$ = average of clay and silt contents combined, fraction

$FINES$ is calculated from clay and silt contents of the manure pack layer, 6 and 32%, respectively ([Razote et al., 2006](#)),

and the underlying soil layer, which are available as input through the soil characteristics menu of the software. Assuming that the particle density remains constant throughout the manure pack, the calculated saturated hydraulic conductivity, $K_{hc,sat}$, is adjusted to account for the lower porosity at the surface using the Kozeny-Carman equation ([USDOE, 2009](#)):

$$K_{hc,adj} = K_{hc,sat} (f_{sur}^3 / (1-f_{sur})^2) ((1-f_{mp})^2 / f_{mp}^3) \quad [4.29]$$

where $K_{hc,adj}$ = adjusted saturated hydraulic conductivity, m/s

f_{sur} = porosity of the surface, fraction

f_{mp} = porosity of the manure pack, fraction

Mass transfer resistance for fresh manure is the inverse of the adjusted saturated hydraulic conductivity, $K_{hc,adj}$. For computation of the mass transfer resistance for non-fresh manure, the unsaturated hydraulic conductivity is estimated from the adjusted saturated hydraulic conductivity based on manure pack moisture content and texture. The relationships used in calculating the unsaturated hydraulic conductivity are based on [Saxton and Rawls \(2006\)](#):

$$K_{hc,unsat} = K_{hc,adj} (WFP/100)^{(3+2/\gamma)} \quad [4.30]$$

where $K_{hc,unsat}$ = unsaturated hydraulic conductivity, m/s

WFP = manure pack water-filled pores space, %

γ = slope of the logarithmic tension-moisture curve

The variable γ is a function of soil texture as computed using equations 1, 2, 15 and 18 of [Saxton and Rawls \(2006\)](#).

Similar to computations for other facilities, hourly emissions from open lots are summed to obtain daily emissions. At the end of each day, remaining *TAN* either infiltrates the manure pack or stays on or near the surface for potential volatilization the next day depending upon the infiltration characteristics of the surface for that day.

Bedded Pack Barns

For bedded pack barns, there are three general ways of managing the bedded manure pack (i.e., manure pack with bedding): 1) the bedded manure pack, or just bedded pack, is scraped and removed at regular short intervals from daily to every few weeks; 2) the bedded pack is allowed to accumulate; and 3) the bedded pack is allowed to accumulate and is aerated through regular stirring or tilling to enhance microbial decomposition. Barns that practice the last two bedded pack management styles are typically called deep-bedded pack barns and compost barns, respectively. In the model, bedded pack barns represent those that fall under the category of deep-bedded pack with infrequent removal.

Animal spacing for bedded pack barns is set at 5.0 m² per cow and 3.0 m² per growing animal. With the presence of a bedded pack, which is similar to the manure pack in open lots, simulation of ammonia emissions for bedded pack barns follows the procedure implemented for open lot facilities (see [Ammonia Emission Open Lot](#) section above; [Bonifacio et al., 2015](#)). The mass of *TAN* for bedded pack barns is calculated based on daily urine excretion, and the amount of organic matter present in the bedded pack (see [Nitrous Oxide](#) section). Expressions used in simulating processes such as urea hydrolysis (equation 4.20) and ammonia volatilization from fresh (equations 4.6 to 4.11, 4.13 to 4.15) and non-fresh manure areas (equation 4.26) are those used for open lot facilities. Simulation of ammonia emissions is done on an hourly time step and the daily emission is obtained by summing hourly emissions within the day.

Unlike open lots, however, bedded pack barns are structures with sidewalls and a roof resulting in lower air velocity in the barn with negligible effects from solar radiation. As a result, bedded pack barns have wet manure pack conditions throughout the year, with moisture contents ranging from 60% to 75% ([Spiehs et al., 2011](#); [NRCS South Dakota, 2011](#)). To provide drier conditions for cattle, bedding materials such as straw and manure solids are added to the surface of the manure pack to absorb some of the excess moisture. Effects of these manure pack conditions (i.e., wet) and management (i.e., bedding use) on ammonia emissions are modeled for bedded pack barns.

Presence of bedding materials on the pack can reduce ammonia emission by absorbing some urine and immobilizing some of the ammonium ([Misselbrook and Powell, 2005](#); [Gilhespy et al., 2009](#)). In the model, the fraction of urine absorbed by the bedding material is computed as a function of total absorbance capacity of the bedding and the amount of urine excreted:

$$F_{abs} = \min(F_{abs,max}, ABS_{total} / URINE) \quad [4.31]$$

where F_{abs} = fraction of urine absorbed

$F_{abs,max}$ = maximum fraction of urine that can be absorbed

ABS_{total} = total absorbance capacity of the bedding material on the surface, kg H₂O

$URINE$ = daily urine production calculated using equation 3.5, kg/day

The setting for $F_{abs,max}$ is 0.50, based on refinement using measurements by [Gillespy et al. \(2009\)](#) and [Misselbrook et al. \(2000\)](#), from which 30%, 73%, and 80% reductions in ammonia emissions were approximated for 3-lb, 10-lb, and 20-lb amounts of straw bedding, respectively. In a simulation performed, the model predicted that application of 3-lb, 10-lb, and 20-lb straw bedding would lead to ammonia emissions lower than those from no bedding by 37%, 76%, and 78%, respectively, with the maximum amount of urine absorbed limited to half of the total excretion.

The ABS_{total} is given by:

$$ABS_{total} = ABS_{unit} (BED_{animal}) (ANIMALS) \quad [4.32]$$

where ABS_{unit} = absorbance per unit mass of bedding, kg H₂O/kg bedding
 BED_{animal} = mass of bedding per animal per day, kg bedding/animal-day
 $ANIMALS$ = number of animals kept in the bedded pack barn.

Properties, which include ABS_{unit} , for several types of bedding materials ([Misselbrook and Powell, 2005](#); [Bickert et al., 2000](#)) are summarized in [Table 4.1](#). The BED_{animal} is a user-defined parameter.

Ammonium adsorption is considered in calculating the ammonia fraction in TAN for non-fresh manure areas (equation 4.26). The adsorption capacity of the bedded pack is based on its two components: decomposed/non-fresh manure and bedding. An ammonium adsorption linear partitioning coefficient (K_f) for manure is set to 10 L/kg ([Waldrip et al., 2012](#)) whereas for bedding, it is approximated from the cation exchange capacity of the material used ([Table 4.1](#)). For both manure and bedding, concentration of solids for ammonium adsorption (C_s in equation 4.26) is calculated from their corresponding dry matter masses and the total volume of bedded pack moisture.

The water routine for bedded pack barns was evaluated and found to be applicable in predicting water movement for cattle bedded manure packs ([Ayadi et al., 2015a](#)). The moisture content of the bedded pack is predicted using the soil water component based on relationships by [Jones and Kiniry \(1986\)](#). However, relationships by [Jones and Kiniry \(1986\)](#) for simulating water evaporation and calculating water diffusivity do not apply for bedded pack barns due to the absence of solar radiation and significantly wetter pack conditions. For bedded pack barns, the amount of water evaporated is a function of the difference in moisture concentrations between ambient air and the air layer right above the bedded pack surface ([Black et al., 2013](#)):

$$EVAP = K_{g,w} (C_{sur} - C_{air}) (3,600) (24) (AREA) \quad [4.33]$$

where $EVAP$ = amount of water evaporated, kg H₂O/day
 $K_{g,w}$ = overall surface mass transfer coefficient of water, m/s
 C_{sur} = moisture concentration of the air layer right above the surface, kg H₂O/m³ dry air
 C_{air} = moisture concentration of ambient air, kg H₂O/m³ dry air
 $AREA$ = surface area of the bedded pack, m²

The $K_{g,w}$ value is calculated using an empirical equation derived using data by [Mackay and Yeun \(1983\)](#) (equation 3.11). The C_{sur} and C_{air} values are estimated from corresponding relative humidities (i.e., 100% and ambient air relative humidity, respectively) and ambient air temperature ([Black et al., 2013](#)). Ambient air relative humidity is calculated using equation 3.12 (see [Manure Composting](#) section). The surface area is just the product of animal spacing and the total number of animals in the barn. In situations in which $EVAP$ exceeds urine excretion ($URINE$), $EVAP$ will be limited by the total amount of moisture in the first 3 cm of the bedded pack (i.e., similar to assumption used by [Jones and Kiniry \(1986\)](#)).

The water diffusivity used in simulating unsaturated flows ([Jones and Kiniry, 1986](#)), and also in calculating the resistance to ammonia mass transfer in the manure (R_m in equations 4.12 and 4.13), is estimated using an empirical equation derived using hydraulic conductivity data by [Sutitarnnontr et al. \(2014\)](#) (equation 3.10). In simulating water movement, the bedded pack profile is modeled in four layers. Depths of 7 and 8 cm are assigned for the first and second layers, respectively. The remaining depth of the bedded pack (i.e., total depth minus 15 cm) is divided equally into third and fourth layers. Saturation moisture and field capacity contents of the bedded pack used in the simulation are calculated using equations 4.24 (i.e., without the OM_{mp} variable) and 4.25, respectively. Simulated total bedded pack depth and assumed particle density are discussed in the [Nitrous Oxide](#) section.

Manure Storage

When long term storage of manure is used on livestock farms, the storage facility is another important source of ammonia emission. Manure is stored in a liquid, slurry, or solid form depending upon the manure management strategy

used. By the time manure is placed into storage, most of the urea has been converted to *TAN*. Any remaining hydrolysis has no effect on ammonia emission, so urea conversion to *TAN* is assumed to be complete once manure is removed from the barn. Bedding and manure solids can be separated from manure to form liquid manure (about 5% DM). This liquid portion, containing most of the *TAN*, is typically stored in an earthen basin or tank. Due to wind-induced mixing and the mixing created when manure is pumped into the storage, this liquid portion remains relatively well mixed. When manure is stored as slurry (7-12% DM), less mixing occurs within the storage structure, so diffusion is more important. If the slurry is pumped into the bottom of the storage tank or basin, a crust can form on the manure surface. This crust provides additional resistance, further reducing the rate of migration to the surface. Manure mixed with bedding material may also be stored as semi-solid or solid manure (greater than 12% DM). In this form, diffusion through the manure becomes a major constraint to the emission rate. For each type of storage, equations 4.6 to 4.15 are used to describe diffusion, dissociation, aqueous to gas partitioning, and mass transport away from the manure surface to predict emission rate. As described below, the difference among storage types is in the diffusion properties of the manure and the constraint they place on the movement of *TAN* to the surface.

On a given day, the amount of *TAN* in storage is that accumulated up to that day minus that lost from the storage between the date loading began and the given date. The accumulated *TAN* is that removed from the barn plus the portion of the organic *N* that mineralizes to an ammoniacal form during long-term storage. Mineralization is calculated on a daily time step where the rate of mineralization is a function of the manure temperature:

$$TAN_o = N_o \min (0.007, 0.007 (1.2^{(T_m - 20)})) \quad [4.31]$$

where TAN_o = rate of organic *N* transformation to *TAN*, kg/d

N_o = organic *N* in storage, kg

T_m = temperature of stored manure, °C

Manure temperature in the storage is set as the average ambient temperature over the previous 10 days.

The daily emission rate is a function of the exposed surface area, *TAN* concentration, temperature, air velocity, and surface pH. Slurry and liquid manures are assumed to spread across the exposed surface of the storage where the surface area is determined by the storage dimensions set by the model user. Thus in the early stages of loading, manure is in a relatively thin layer with a large surface area per unit volume stored. As the storage fills, this surface area to volume ratio decreases. *TAN* concentration on a given day is the total *TAN* remaining in the storage divided by the liquid mass in the storage. This liquid mass on a given day is the total manure mass in the storage minus the manure *DM* loaded into the storage. Daily changes due to precipitation and evaporation are not specifically modeled, but the total mass includes the long-term moisture added from wash water and rain. Air friction velocity at the surface is determined using equation 4.10 where the ambient air velocity is the average daily wind velocity.

Manure pH is a function of the solids content of the manure. A relationship was developed to vary the bulk pH of stored cattle manure from 7 with no manure solids to 8.5 with a relatively high solids content:

$$PH = \min (8.5, 15.3 - 8.2 (1 - DMC)) \quad [4.32]$$

where DMC = dry matter content of the stored manure, fraction

PH = pH in the bulk of the manure

Surface pH also varies with solids content. With no solids in the manure, carbon dioxide is not formed and emitted, so the surface pH is the same as the bulk pH. With increasing solids, there is greater opportunity for microbial decomposition, formation and emission of carbon dioxide, and thus a greater increase in surface pH relative to bulk pH:

$$PHS = \min (8.5, PH + 8.0 - 8.0 (1 - DMC)) \quad [4.33]$$

where PHS = manure surface pH.

This effect on surface pH is included for stacked manure and top-loaded slurry or liquid storages. For bottom loaded storages, this surface pH effect is not included since fresh manure is not exposed at the surface.

The resistance to ammonia loss is the sum of the resistances to transport through the bulk manure to the surface and from the surface to the free atmosphere (Equation 4.13). The effective resistance of the manure is a function of manure type with assigned values of 3×10^5 , 2×10^5 , 33×10^3 and 0 s/m for solid, semi solid, slurry, and liquid manure types, respectively. The additional resistance for covered and enclosed manure storages is 2×10^5 and 2×10^6 s/m, respectively.

Daily loss of ammonia *N* is determined such that the cumulative loss up to a given date cannot exceed the

accumulated *TAN* loaded into the storage. This is particularly important in the early stages of loading when a thin layer of manure on the bottom of the storage creates maximum exposure for the loss of *TAN*. By summing daily emissions over the full year, an annual storage loss is determined. For storages with a six-month capacity, the storage is emptied in early April and again in early October. With a twelve-month capacity, the storage is emptied only in April. The mass of *TAN* available for field application is the mass remaining in the manure when the storage is emptied.

Field Application

Manure is applied to fields either through daily hauling or from long-term storage. With a daily strategy, smaller amounts of manure are applied each day. When storage is used, large amounts of manure are applied over a period of several days. The same model is used to simulate each of these approaches. With daily hauling, the manure produced each day is applied the same day. With six-month storage, half of the annual manure produced and stored on the farm is applied to cropland over ten-day periods in early-to mid-April and early-to mid-October. For twelve-month storage systems, all manure for the year is applied in a ten-day period in April.

Four manure application methods are modeled: broadcast spreading, irrigation, band spreading, and direct injection into the soil (Rotz et al., 2010). Some *TAN* is lost as the manure moves through the air in the actual application process. This loss is 1% and 10% of the applied *TAN* for broadcast spreading and irrigation with no loss in band spreading and injection. Thus, the manure *TAN* reaching the field surface is that hauled from the barn or manure storage on a given day minus this loss.

When applied to a soil surface, the manure is applied in a thin layer where remaining *TAN* can readily volatilize as ammonia. Emission from the manure applied on a given day is determined by integrating equations 4.6 to 4.15 over the period until the manure is incorporated by a tillage operation. A maximum of 15 d is set for this period since all *TAN* is normally lost or infiltrated into the soil after this much time on a field surface. Because the emission rate is very rapid when manure is first applied, this integration is done on a 2-hour (0.08 d) time step. Loss during each time step is determined using the average ambient temperature of each day over this period. Manure pH is set to increase to 8.6 immediately following application due to the rapid release of CO₂ (Sommer et al., 1991). As the manure lays in the field, the pH decreases at a rate of 0.3 units per day until it reaches a neutral pH of 7.0 (Sommer et al., 1991).

The mass of water contained in the manure (M_w) on the field surface varies through time. The initial amount following application is set assuming a manure application rate of 0.3 kg DM/m². The contained water is calculated from the application rate and the manure *DM* content (*DM* application rate divided by the manure *DM* content minus the manure *DM*). The remaining manure moisture is adjusted during each time step by subtracting infiltration and evaporation and adding moisture from rain.

Evaporation is predicted as proportional to the incident solar radiation of the day. Daily evaporation (*EV*) varies from 0 to 60% of the available solution mass as solar radiation varies between 0 and a maximum level of 30 MJ/m². When rain occurs, the manure solution is increased assuming a uniform rate of rainfall over the daily period.

Infiltration is determined as a function of the manure *DM* content (Hutchings et al., 1994):

$$IR = e^{(6.95 - 31.9 DMC)} \quad [4.34]$$

where *IR* = infiltration rate, kg/m²-d or mm/d

DMC = manure *DM* content, fraction

Daily infiltration is limited to a maximum of 70% of the available manure water content. The remaining mass of water at each time step is M_w minus *EV*. During each time step, the mass of water is reduced by the infiltration and evaporation rates times the length of the time step (0.08 d) and increased by the rainfall rate times the time step length.

Manure *TAN* on the soil surface also varies through time. The initial *TAN* is that reaching the soil following the application process. During each time step, ammonia loss occurs to the atmosphere and *TAN* moves into the soil with the infiltration of moisture. The *TAN* moving into the soil is set in proportion to the manure solution that infiltrates into the soil, i.e., if *IR* is 10% of M_w , 10% of the available *TAN* is removed from the surface pool and is thus unavailable for volatilization. Ammonia emission is determined for each time step using equations 4.6 to 4.15. This loss is a function of the *TAN* and M_w on the field surface at a given point in time. At the completion of each time step, *TAN* and M_w are adjusted to provide initial values for the next time step.

Ammonia loss is determined by integrating these relationships over the period from application until incorporation into the soil or 15 days. This provides an exponential decline in the emission rate through time as influenced by changes in manure *TAN* content, infiltration rate, and *DM* content along with the effects of rainfall and ambient air temperature. When manure is incorporated the same day as applied, an average exposure time of 8 h is assumed. When manure is

not incorporated, remaining TAN becomes negligible after a few days, and the emission rate approaches zero.

To predict loss from manure directly injected into the soil, a simpler approach is used. Because little manure remains on the surface, the process level simulation of surface emissions is bypassed. Ammonia *N* loss is about 5% of the *TAN* in manure applied through deep injection into cropland and 8% of the *TAN* in manure applied through shallow injection to grassland. This provides relatively small losses, similar to those measured in field experiments.

Losses occurring from daily applications are summed to determine an annual loss. The total loss includes ammonia volatilized during the application process plus that volatilized from the field surface following application. Any remaining *TAN* not volatilized is available in the soil for plant uptake along with mineralized organic *N*.

Grazing Deposits

When grazing is used, ammonia emission occurs from fecal and urine deposits in the pasture. The *N* in feces is primarily organic, so about 90% of the ammonia emission occurs from the *N* in urine (Rotz, 2004). A portion of the urine (about 30-50%) infiltrates into the soil where urea hydrolyzes and the resulting *TAN* binds to soil. The remaining portion settles on plant and soil surfaces where it comes in contact with urease. Urease enzyme activity quickly transforms the urea to *TAN* that can volatilize.

To model ammonia emission from pastures, a similar approach is used as that for field application of manure, but some simplifying assumptions are made. The *TAN* available for volatilization is the urea *N* and *TAN* excreted by grazing animals. Although hydrolysis must occur to transform the urea to *TAN*, this process is relatively fast compared to the time animals are on pasture. Thus hydrolysis is assumed to immediately transform all urea to *TAN*. The *N* excreted is determined by how they are fed (See the [Herd and Feeding](#) section), and the portion applied to pasture is set proportional to the time each animal group spends on pasture. The amount of *TAN* applied is 71% of the urine *N* plus 9% of the fecal *N* excreted on pasture.

The daily solution mass applied is the total urine from all animals on pasture. Of this total, a portion is assumed to immediately infiltrate into the soil and the remainder infiltrates at a slower rate. The amount remaining on the soil surface immediately after excretion (M_w) varies from about 3 to 7 kg/m² (or mm/d) as a function of the moisture-absorbing ability of the soil (Rotz and Oenema, 2006):

$$M_w = 16.5 - 0.146 CN \quad [4.35]$$

where CN = the runoff curve number for the user-specified soil.

Of this remaining solution, a portion infiltrates at a daily rate:

$$IR = 1 - 0.55 M_w / (M_w + RN) \quad [4.36]$$

where IR = daily infiltration rate into soil, mm/d

RN = daily rainfall, mm/d

If rainfall occurs on a given day, the manure mass is diluted by the rain, i.e., M_w is increased by the daily rainfall amount. This dilution reduces the concentration of the remaining *TAN* in the solution and increases infiltration. The portion of the *TAN* deposited that infiltrates into the soil is determined by the amount of manure moisture that infiltrates and the concentration of *TAN* in that moisture.

Hourly emission rates are determined using equations 4.6 to 4.15 based upon temperature, air velocity, and manure solution pH. Hourly ambient temperature is set using equation 4.17, and ambient air velocity is the average daily wind speed. The pH is set at 8.5 to reflect an increase that normally occurs in urine patches over the first few days following deposition (Haynes and Williams, 1992).

Daily ammonia loss from grazing animals is determined for each day animals are on pasture. When animals are maintained on pastures throughout the winter, a daily loss is determined for each day of the year. Otherwise, losses are integrated over the grazing season set by the model user considering the time each animal group spends on pasture. Calculated losses are summed over the time on pasture to obtain an annual loss. Remaining *N* is available for fertilization of the pasture.

Hydrogen Sulfide Emissions

Hydrogen sulfide is a toxic compound that is regulated by the US EPA under the Clean Air Act. In response to the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA; EPA, 2010), there is a reporting requirement for any point source that emits more than 100 lb (454 kg) of this compound on any given day. Therefore, it is important for producers to know the amount of this compound emitted from their farms. Normally emissions of

hydrogen sulfide from cattle operations are well below this limit.

Hydrogen sulfide is primarily created and emitted from decomposing manure under anaerobic conditions. Major sources include the barn floor and long-term manure storage with minor losses following field application. Hydrogen sulfide is a contributor to the nuisance of manure odor. It is also a toxic compound when the concentration builds up in a confined space such as an enclosed manure storage. Therefore, it can be a threat to human and animal health in poorly ventilated facilities. Hydrogen sulfide is also very corrosive, which can lead to deterioration, greater maintenance, and shortened life of farm facilities.

Formation and Emission Processes

Cattle feeds contain minor amounts of sulfur with most of this sulfur present in the amino acids cystine and methionine. Hard drinking water is another potential source. In the rumen, sulfur in amino acids and sulfate are reduced to sulfide by bacteria ([Van Soest, 1994](#)). Excess sulfur in the diet is processed by bacteria to hydrogen sulfide, which is transported through the digestive track, absorbed, and oxidized to sulfate in the liver. Sulfate is then excreted in urine or recycled through salivary excretion. Although much of the excreted sulfur is in the form of sulfate, microbial activity in the manure can transform the sulfur to a sulfide form.

Hydrogen sulfide forms a weak diprotic acid that dissociates into hydrogen (H^+), bisulfide (HS^-), and sulfide (S^{2-}) ions when dissolved in an aqueous solution. The following reactions govern the presence of the different forms ([Arogo et. al., 1999](#)):



The fractions of H_2S , HS^- , and S^{2-} (α_0 , α_1 , α_2 , respectively) present in an infinitely dilute solution can be calculated from the pH of the solution and the ionization constants using the following equations ([Snoeyink and Jenkins, 1980](#)):

$$\begin{aligned} \alpha_0 &= [H^+]^2 / ([H^+]^2 + K_{a,1}[H^+] + K_{a,1} K_{a,2}) & [5.4] \\ \alpha_1 &= K_{a,1} [H^+] / ([H^+]^2 + K_{a,1}[H^+] + K_{a,1} K_{a,2}) & [5.5] \\ \alpha_2 &= K_{a,1} K_{a,2} / ([H^+]^2 + K_{a,1}[H^+] + K_{a,1} K_{a,2}) & [5.6] \end{aligned}$$

where $K_{a,1}$ = first ionization constant, $10^{-7.1}$ at 25 °C
 $K_{a,2}$ = second ionization constant, 10^{-14} at 25 °C

[Figure 5.1](#) shows the change in concentrations of the different sulfide species in an aqueous solution with respect to pH at 25°C. Only $H_2S_{(aq)}$ can be released from the liquid phase. As the pH changes from basic to acidic, the concentration of molecular hydrogen sulfide in water increases, increasing the potential for $H_2S_{(g)}$ emission. The sulfide anion forms at pH levels above 12. This condition is significantly above the pH of cattle manure, and therefore is ignored in our model.

The ionization constants for H_2S and HS^- are a function of temperature. Based on Van't Hoff's equation ([Snoeyink and Jenkins, 1980](#)):

$$\ln (K_{T1} / K_{T2}) = \Delta H^\circ (1/T_2 - 1/T_1) / R \quad [5.7]$$

where T = temperature, K

K_{T1} = equilibrium constant at temperature T_1 , mol/L

K_{T2} = equilibrium constant at temperature T_2 , mol/L

ΔH° = standard enthalpy change, 21673 J/mol

R = universal gas constant, 8.3145 J/K-mol

The hydrogen sulfide dissociation constant ($K_{a,1}$) can be estimated at different solution temperatures (T_L) with:

$$\ln K_{a,1} = \ln (1.26 \times 10^{-7}) - (2606 (1 / (273 + T_L) - 1 / 298)) \quad [5.8]$$

where T_L = solution temperature, °C

To determine the hydrogen sulfide emission rate, the $H_2S_{(aq)}$ concentration in the aqueous solution or liquid manure must be known. This cannot be directly measured, but the total sulfide concentration (sum of the three sulfides) is easily measured. At a typical manure pH of 6 to 8, the fraction of S^{2-} is negligible ($\alpha_2 \approx 0$ and $K_{a,1} K_{a,2} = 0$), so a simplified version of equation 5.4 and $C_{T,S}$ can be used to estimate the concentration of $H_2S_{(aq)}$:

$$C_L = C_{TS} (10^{-PH}) / (10^{-PH} + K_{a,1} / 0.7) \quad [5.9]$$

where C_L = concentration of hydrogen sulfide in manure solution [$H_2S_{(aq)}$], kg/m³
 C_{TS} = total sulfide concentration in manure solution, kg/m³
 PH = pH of the manure solution, $-\log H^+$]

In Eq. [5.9], the thermodynamic ionization constant calculated from Eq. [5.8] is corrected for the activity coefficient of HS^- , which is taken as 0.7 (see [Ammonia Emissions](#) section). The activity coefficient of H_2S was assumed to be unity.

The mass transfer or emission process is often described using the two-layer film model of molecular exchange between water and air ([Figure 5.2](#)). As described below, this model is a major simplification of the processes thought to control H_2S emission. In our model, we assume that H_2S diffuses from the bulk liquid through the liquid film to the air-liquid interface, where it further diffuses through the air film to the surrounding turbulent air ([Blunden et. al., 2008](#)). Using this theory, the main body of each fluid is assumed to be well mixed and the main resistance to gas transport is from the gas and liquid interfacial layers, where the gas transfer is by molecular processes ([Liss and Slater, 1974](#)). The overall flux is represented as ([Liss and Slater, 1974; Cussler 1997; Lewis and Whitman, 1924](#)):

$$J = K (C_L - H (C_a)) \quad [5.10]$$

where J = emission flux, kg/m²-s
 K = overall mass transfer coefficient, m/s
 H = Henry's Law constant, g liquid/g gas
 C_a = concentration of hydrogen sulfide in ambient air [$H_2S_{(g)}$], kg/m³

Equation 5.10 gives the overall emission flux used to estimate hydrogen sulfide mass transfer across the gas-liquid interface, with K being a function of the transfer resistances of the aqueous and gas layers:

$$K = 1 / (H / k_a + 1 / k_L + R_m) \quad [5.11]$$

where k_L = mass transfer coefficient through the liquid layer, m/s
 k_a = mass transfer coefficient through the gaseous layer, m/s
 R_m = resistance to mass transfer created by a cover, s/m

The Henry's Law constant for H_2S is modeled using a function developed by [Blunden et al. \(2008\)](#). For a dimensionless Henry's Law constant (aqueous:gas), this equation is:

$$H = 1 / (-4 \times 10^{-7} T_L^3 + 4 \times 10^{-5} T_L^2 + 0.0067 T_L + 0.2147) \quad [5.12]$$

The mass transfer coefficients (k_a and k_L) are related to the properties of the gas and liquid layers. For our model, these are the properties of the air and manure solution. Important properties include the density, viscosity, and diffusivity of both the gas and liquid components. The density of moist air is related to both temperature and relative humidity ([Arogo et al., 1999](#)):

$$\rho_a = (353 / T_a) (760 - 0.3783 RH e^{(0.0596 T_a - 14.6135)}) / 760 \quad [5.13]$$

where ρ_a = density of moist air, kg/m³
 T_a = air temperature, K
 RH = relative humidity, fraction

The density of the manure solution is assumed to be that of water. [Holman \(1981\)](#) reported values for water density as a function of temperature from 0 to 315°C. These values were fitted to a linear trend line to obtain an equation for the density as a function of temperature:

$$\rho_w = 1033.3 - 0.934 T_L \quad [5.14]$$

where ρ_w = density of water, kg/m³

The dynamic viscosity of air is estimated as a function of temperature using the following empirical expression ([Jacobson, 1999](#)):

$$\mu_a = 1.8325 \times 10^{-5} (416.16 / (T_a + 120)) (T_a / 296.6)^{1.5} \quad [5.15]$$

where μ_a = dynamic viscosity of air, kg/m-s
 T_a = air temperature, °K

The dynamic viscosity of water is predicted using a relationship from [Xiang et al. \(1997\)](#):

$$\mu_w = 4.57 \times 10^{-5} (TR / 647.1)^{-(1.77 THETA - 0.25 + 2.95 THETA)} \quad [5.16]$$

where μ_w = dynamic viscosity of water, kg/m-s
 $THETA = (1 - TR)^2 / TR$ [5.17]
 TR = temperature T_L expressed as a fraction of absolute temperature

Based on the [Wilke and Chang \(1955\)](#) correlation, the following equation was used to determine the diffusion coefficient for hydrogen sulfide in water.

$$D_w = 0.00074 (273 + T_L) (\phi MW)^{0.5} / (\mu_w V^{0.6}) \quad [5.18]$$

where D_w = diffusion coefficient of H₂S in water, cm²/s
 ϕ = solute-solvent interaction factor, 2.6
 MW = molecular weight of water, 18.01 g/mol
 V = molar volume of hydrogen sulfide at the boiling point, 32.9 cm³/mol

As presented in ([Cussler, 1997](#)), the diffusivity of hydrogen sulfide in air was derived from:

$$D_a = 10^{-7} ((273 + T_a)^{1.75} (1/MW_1 + 1/MW_2)^{1/2}) / P (V_{i1}^{1/3} + V_{i2}^{1/3})^2 \quad [5.19]$$

where D_a = diffusivity of H₂S in air, m²/s
 MW_1 = molecular weight of H₂S, 34 g/mol
 MW_2 = molecular weight of air, 29 g/mol
 V_{i1} = diffusion volume of H₂S, 20.96 cm³/mol at 1 atm
 V_{i2} = diffusion volume of air, 20.1 cm³/mol at 1 atm
 P = atmospheric pressure, 1 atm

The mass transfer coefficients were obtained from existing mass transfer correlations recommended as generally applicable for compounds including hydrogen sulfide ([EPA, 1994](#)). The gas and liquid mass transfer coefficients are functions of wind speed at a reference height of 10 meters, kinematic viscosity, and diffusivity. The air mass transfer coefficient equation was taken from [Mackay and Yeun \(1983\)](#):

$$k_a = 0.001 + 0.0462 (U^*) S_{ca}^{-0.67} \quad [5.20]$$

where k_a = air mass transfer coefficient, cm/s
 U^* = friction velocity, m/s
 $= 0.02 U^{1.5}$ [5.21]

U = wind speed at reference height of 10 m
 S_{ca} = Schmidt Number in air, dimensionless
 $S_{ca} = \mu_a / (\rho_a / D_a)$ [5.22]

The liquid mass transfer coefficient equations were obtained from [Springer et al. \(1984\)](#) as applied by the [EPA \(1994\)](#):

For $U < 3.25$
 $k_L = 2.78 \times 10^{-6} (D_w / D_{ether})^{2/3}$ [5.23]

For $U > 3.25$
 $k_L = (2.6 \times 10^{-9} FD + 1.277 \times 10^{-7}) U^2 (D_w / D_{ether})^{2/3}$ [5.24]

where k_L = liquid mass transfer coefficient, m/s
 D_{ether} = diffusion coefficient for ethyl ether in water, cm²/s
 FD = linear distance across surface over depth
 S_{cw} = Schmidt Number in the liquid, dimensionless
 $= \mu_w / (\rho_w / D_w)$ [5.25]

The diffusion coefficient for ethyl ether (D_{ether}) is determined using equation 5.18 with a molar volume for ether of 107 cm³.

This model has some potential shortcomings in representing the full emission process for hydrogen sulfide. First, our model only includes diffusion of hydrogen sulfide in the liquid film. Diffusion of HS^- is expected to also transport sulfide through the liquid film, but is not included. The assumption of a well-mixed bulk solution below a liquid film may not be an accurate description of manure in storage, where a gradient in redox potential may cause a gradient in total sulfide. Moreover, liquid phase diffusion may not be the only mechanism responsible for transferring sulfide to the manure surface, since biogas bubbles emitted from manure may be a significant mechanism of hydrogen sulfide transport (Ni et al., 2009). Despite these shortcomings, our model is able to match measured emission rates of hydrogen sulfide from farms, suggesting that the model is a reasonable approximation, or contains compensating errors. Simulation results suggest that hydrogen sulfide emission is limited by sulfide production. Therefore, accurate predictions of hydrogen sulfide emission will ultimately require a better understanding of sulfide production in manure.

Enteric Emission

A major source of emission on cattle operations is direct emission from the cattle through belching or flatulence. Microorganisms in the digestive tract produce gases during the digestion of feed, particularly during fermentation in the rumen (Dewhurst et al., 2001). Therefore, enteric and other direct emissions of hydrogen sulfide from the animals must be considered.

Hydrogen sulfide, methyl sulfide, and dimethyl sulfide are the predominant sulfur containing gases present in the rumen headspace of cattle (Dewhurst et al., 2001). As stated by Dewhurst et al. (2001), neither Elliot-Martin et al. (1997) or Mottram et al. (2000) found hydrogen sulfide above 2 mg/kg in expired breath, confirming that most of the hydrogen sulfide is absorbed via the lungs and detoxified (Bird, 1972). Studies by Dewhurst et al. (2001) confirmed significant production of dimethyl sulfide in the rumen. Although the dimethyl sulfide levels were 10-fold lower than hydrogen sulfide in rumen gas, only dimethyl sulfide was detected in the cows' breath (Mottram et al., 2000). Therefore, enteric hydrogen sulfide emission was assumed to be insignificant and is ignored as an emission source.

Housing Floor

Manure on the floor of housing facilities is a potential source of hydrogen sulfide emission. This hydrogen sulfide may form from sulfide in the manure excreted by the animal or it may be formed through microbial decomposition of sulfate in the manure. Floor emission is predicted on an hourly time step using the two-layer thin film model described above. The hourly emission is a function of temperature, air velocity, sulfide content in the manure, and manure pH. Hourly air temperature is predicted as a function of the daily maximum and minimum temperatures using equations 4.17 and 4.18. When the cattle are in an enclosed barn, the indoor temperature is a function of outdoor temperature (Eq. 4.16). Manure temperature is set to the average daily temperature. Air velocity in outdoor facilities is set equal to the mean daily wind velocity measured at a 10 m height as obtained from the weather input file. When animals are in an open barn, this velocity is reduced by 50%. For an enclosed barn with mechanical ventilation, the velocity is set as a function of the outdoor temperature (Eq. 4.19) to reflect an increase in ventilation rate with temperature.

Little information is available on the sulfide content of freshly excreted cattle manure on a barn floor or open lot surface. Data reported by Zhao et al. (2007) and Finke and Jorgensen (2008) indicate that sulfate reduction to sulfide increases exponentially from 0°C to around 35°C and then declines. Based upon the work of Zwietering et al. (1991), the following relationship was developed to predict the sulfide concentration that results from microbial activity in excreted manure laying on the barn floor:

$$C_{TS} = C_S (0.0033 (T_L + 5))^2 (1 - e^{(0.75 (T_L - 45))}) \quad [5.26]$$

where C_S = total sulfur concentration in excreted manure, kg/m³

C_{TS} = total sulfide concentration in manure solution, kg/m³

This sulfur concentration is a function of the diet fed with a value of 0.625 kg m⁻³ when the sulfur requirement for the herd is met (ASABE, 2010). This value is increased or decreased in proportion to the amount of sulfur fed above or below the requirement. As temperature increases, increased microbial activity leads to greater decomposition of sulfate in the manure to sulfide.

When a flushing system is used for manure removal, manure solids are typically removed from the manure liquid, and the liquid portion is recycled as the flushing solution. With this process, the sulfide concentration in the liquid increases and becomes less influenced by temperature:

$$C_{TS} = C_S (0.125 + 0.0074 (T_L)) \quad [5.27]$$

This relationship was also developed based upon data collected in the National Air Emissions Monitoring Study ([EPA, 2011](#)).

As illustrated in [Figure 5.1](#), manure pH has a strong influence on the amount of hydrogen sulfide formed. The pH controlling volatilization is that at the manure surface or the interface between the liquid and gas phases. This surface pH is influenced by the rates of volatilization of carbon dioxide and ammonia (see [Ammonia Emission](#) section). For a freshly disturbed manure surface, the volatilization of carbon dioxide is greater than that of ammonia causing an increase in pH. For manure on a barn floor, this surface pH is set at an average value of 0.7 units greater than the bulk manure pH, which is set at 7.5.

Hourly emissions are summed to obtain a total emission for each day. This emission is proportional to the amount of time the animals spend in the housing facility assuming that the amount of manure excreted is proportional to the time spent in the barn or open lot. Daily emissions are summed to obtain the annual emission from the housing facility.

Manure Storage

When long term manure storage is used on the farm, this storage is typically the largest source of hydrogen sulfide emission. Stored manure emissions are modeled on an hourly time step as a function of manure and air temperatures, air velocity, sulfide concentration, manure pH, and the amount of manure in the storage. Manure temperature is predicted as the average ambient temperature over the previous 10 days. Hourly air temperature is predicted as a function of the daily maximum and minimum temperatures using equations 4.17 and 4.18. Air velocity is the reported mean daily wind velocity obtained from the weather input for the model.

The pH controlling the sulfide emission process is that at the manure surface, which can be greater than that within the storage. Bulk pH is determined as a function of the solids content of the manure using equation 4.32. For top loaded slurry storages or manure stacks, the surface pH can be greater than that of the bulk pH (See [Ammonia Storage Emissions](#) section). This increase is predicted as a function of the manure solids content using equation 4.33.

The amount of manure in the storage on a given day is the sum of that removed from the housing facility since the manure storage was last emptied. The sulfide accumulated in the manure is the balance between that added through sulfate decomposition and that emitted. That added on a given day is proportional to the sulfur content of the manure in the storage as influenced by temperature:

$$TS = C_S (M_m) (\max(0., 0.00032 + 0.000073 T_L)) - E_{H_2S} \quad [5.28]$$

where C_S = total sulfur concentration in manure, 0.625 kg/m³
 TS = total sulfide contained in manure on a given day, kg
 M_m = mass of manure in storage, m³
 E_{H_2S} = hydrogen sulfide emitted, kg

Sulfur concentration is that remaining in the manure removed from the barn. The temperature effect on sulfide production is modeled based upon data from various sources (ex. [Finke and Jorgensen, 2008](#); [Zhao et al., 2007](#)) indicating an increase in hydrogen sulfide production with increasing temperature within the normal range of temperature for stored manure. This reflects greater microbial activity and reduction of sulfate with increasing temperature.

When a natural crust forms on the manure surface or a cover is used over the stored manure, a resistance is added to the transfer of sulfide to the surface (Equation 5.11). Resistances for the natural crust, unsealed cover and fully enclosed storage are 4.6×10^5 , 9.2×10^6 , and 9.2×10^7 s/m.

When the storage is emptied, the model is reset and the storage begins to fill. As the storage fills, the potential emission of hydrogen sulfide increases in proportion to the amount of manure in the storage and the sulfide contained in that manure. As described, the amount emitted in a given hour is a function of the manure and environmental conditions of that hour. Predicted hourly emissions are summed to obtain the daily emission, and daily emissions are summed to get an annual emission.

Field Applied Manure

When manure is spread on a field surface, the thin layer applied is exposed to aerobic conditions. Under these conditions, sulfide is not expected to form. Therefore, that emitted is that contained in the applied manure. The amount of sulfide applied is that remaining in the manure removed from the storage. Considering that the transformation of

sulfide to hydrogen sulfide is very fast, we assume all sulfide will transform and be emitted. This hydrogen sulfide is assumed to quickly emit on the day that it is applied. Daily emissions are then summed to obtain an annual emission.

If manure is applied using a daily haul strategy, the assumption is made that no sulfide exists in the manure. Without long term storage of the manure under anaerobic conditions, no further sulfide forms. Therefore, any hydrogen sulfide from excreted manure would be emitted as it lies on the barn floor, and that emitted following application is negligible.

Grazing Animals

Little data exists on hydrogen sulfide emissions from the excretion of grazing animals. This is a minor source, but some emission is expected from fecal deposits on the pasture.

The emission from grazing animals is modeled similar to that from animal housing floors except that only feces deposits are considered as an emission source. Hydrogen sulfide is not expected to form under the more aerobic conditions of urine deposits, but sulfide excreted in feces can be emitted. As the feces decompose, further emission may occur. The feces is assumed to decompose within 60 days with no further sulfide formation after this period.

Emissions are predicted on an hourly time step as a function of temperature, air velocity, pH, and the sulfide concentration in the feces. Hourly temperature of the feces and air are assumed to be equal. This temperature is predicted as a function of daily maximum and minimum temperatures using equations 4.17 and 4.18. Air velocity is set as the mean daily wind velocity at a 10 m height as obtained from input weather data. The pH of the feces is set at a constant value of 7.0, and the sulfide concentration is set at a constant value of 1 g/m³. Hourly emissions are summed to obtain the total daily emission and daily emissions are summed over the time animals are on the pasture to obtain total annual emissions. This emission source is typically very small relative to other farm sources of hydrogen sulfide, so the simplifying assumptions in this component of the model are justified.

Greenhouse Gas Emissions

Important greenhouse gases (GHG) emitted from cattle operations are carbon dioxide (CO₂), methane (CH₄) and nitrous oxide (N₂O), with various sources and sinks of each throughout the operation. A major CO₂ sink occurs through the fixation of carbon in crop growth with emission sources including plant respiration, animal respiration, and microbial respiration in the soil and manure. Major sources of methane include enteric fermentation and the long-term storage of manure with minor sources being the barn and pen floors, field applied manure, and feces deposited by grazing animals. Nitrous oxide is a product of nitrification and denitrification processes in the soil and these processes can also occur in the crust on a slurry manure storage or during the storage of solid manure in a bedded pack or stack.

A comprehensive evaluation of production systems is obtained by considering the integrated effect of all sources and sinks of the three gases. Various processes affecting emissions interact with each other as well as with the climate, soil, and other components. Therefore, all individual processes and their interactions must be integrated in a comprehensive whole-farm analysis to determine the net result.

Carbon Dioxide

Multiple processes emit CO₂ from cattle operations. The major source is animal respiration, followed by less significant emissions from manure storages and barn floors. Cropland assimilates CO₂ from the atmosphere through fixation during crop growth and emits CO₂ through plant and soil respiration. Typically, over the course of a full year, croplands assimilate C from CO₂. In other words, the plants capture more CO₂ through photosynthesis than is emitted through respiration.

Cropland Emissions

A relatively simple but robust approach is used to predict net CO₂ emission from feed production in cropland. By default, the long-term carbon balance for the cropland producing feeds is assumed to be zero. Therefore, the sum of all carbon leaving the cropping system in feed and emissions is equal to that assimilated during the growth of the crop (i.e., the capture of CO₂ through photosynthesis) plus any other C entering the cropping system. Emissions of CO₂ from cropland include that from plant respiration (autotrophic) and soil respiration (heterotrophic), as well as microbial respiration during the decomposition of manure. The primary source of non photosynthetic C entering the system is land applied manure. A user option is provided to allow an annual net sequestration (or loss) of soil carbon to modify the default soil C balance. This allows the user control over the soil C balance and the resulting effect on CO₂ emissions and C footprint.

A carbon balance is determined considering all flows in and out of cropland during the production of feeds used in the cattle production system. By enforcing a long term balance, the net difference between that fixed during crop growth

and that emitted through plant and soil respiration must equal the C removed in harvested feed minus that applied to the cropland in manure. Applied manure is that excreted by the animals minus all C lost in the barn, during manure storage, and following land application plus any C in manure imported to the farm and minus that exported from feed production. Therefore, the net flux of C in feed production is determined as:

$$C_{net} = C_{feed} - (C_{exc} - C_{CH4} - C_{CO2} - C_{exp} + C_{imp}) \quad [6.1]$$

where C_{net} = net flux of C assimilated in feed production minus plant and soil respiration, kg
 C_{feed} = C in feed produced plus that in bedding minus that in excess feed, kg
 C_{exc} = C in manure excreted by animals on the farm, kg
 C_{CH4} = C lost as CH₄ from barn floor, during storage, and following land application, kg
 C_{CO2} = C lost as CO₂ from the barn floor and manure storage, kg
 C_{exp} = C in manure exported from feed production, kg
 C_{imp} = C in manure imported to farm, kg

The C content of most feeds is set at 40% of DM, but that in high protein concentrates is set at 45% of DM and that in added fat is set at 70%. The C in manure excreted by the animals is determined using a C balance of the herd where the C intake must equal the C output. Therefore, the C excreted is equal to that consumed in feed minus that emitted by the animals in CH₄ and CO₂ and that contained in the animal weight produced. Carbon in exported manure is determined as the user-defined portion of manure exported times the C remaining in excreted manure after storage. Imported manure is assumed to have a C content of 40% of DM. Emissions of CH₄ and CO₂ are as defined in the following sections.

Since the net flux of C in feed production, C_{net} , represents a net exchange of CO₂ with the atmosphere, it can be converted to units of CO₂. A conversion is done by multiplying the units of C by the ratio of the molecular weight of CO₂ (44 g/mol) to that of C (12 g/mol). Therefore, there are 3.67 kg of CO₂ assimilated or released per kg of C.

Lime is often used to neutralize the acidity of soil and this provides an additional carbon source for emission as CO₂. Lime use is determined from the user selected soil acidity level. For a soil pH of 7.0 (neutral) or greater, the calcium carbonate equivalent requirement is zero. By totaling the requirements for all crop areas, a total requirement is determined. Since this requirement is normally applied every three years, the total is divided by 3 to obtain an average annual requirement. Over the three year period following lime application, most of the added carbon transforms to carbon dioxide that is volatilized to the atmosphere. We assume that 10% of the total applied will be lost through leaching, runoff or other non volatile means; therefore, 90% is lost through CO₂ volatilization. This primary emission of CO₂ is determined considering that there are 0.12 units of CO₂ carbon emitted per unit mass of calcium carbonate equivalent applied ([IPCC, 2006](#)).

$$E_{CO2, lime} = 0.12 (44/12) (0.9) A_{CaCO3} \quad [6.2]$$

where $E_{CO2, lime}$ = CO₂e emitted from applied lime, kg
 A_{CaCO3} = Average annual application of calcium carbonate equivalent, kg.

The default approach does not allow for long term sequestration or depletion of soil C. By forcing a long term balance, it is assumed that there is no net change in soil C content over time. If major changes in tillage and cropping practices are made, soil C levels can change over a number of years until the soil again reaches an equilibrium level. An example of this type of change is the conversion of row cropland to perennial pasture. Substantial amounts of soil C can be sequestered over 25 to 50 years until equilibrium soil conditions are maintained. Another example is the conversion of conventional tillage to reduced tillage or no tillage practices. Such conversions can increase the net flux of C into feed production, i.e. reduce net CO₂ emission. Our model does not account for this potential change in soil C, but this change can be added or subtracted from the net value determined by DairyGEM. To obtain values for quantifying long term changes in soil C, soil test or literature values can be used. Another model such as COMET-FARM (available at <https://comet-farm.com/>) may also be used to generate values for potential change in soil C.

Animal Respiration

Carbon dioxide emission through animal respiration is sometimes ignored as a GHG emission source ([IPCC, 2001](#) and [2007](#)). This respired CO₂ is part of the C cycle that initially begins with photosynthetic fixation by plants. When the animals consume the crop (fixed C in the plant material), they convert it back to CO₂ through respiration ([Kirchgeßner et al., 1991](#); [IPCC, 2001](#)). On a farm, animal respiration of CO₂ is a major source relative to other CO₂ emissions. In the overall farm balance, the CO₂ released largely offsets the CO₂ assimilated in the plant material. However, some of the feed intake of C is converted and released as CH₄ and some is contained in the animals produced. To obtain a full accounting and balance of all C flows through the farm, all sources of C emissions, including animal

respiration, are considered.

A relationship developed by [Kirchgeßner et al. \(1991\)](#) relating CO₂ emissions to DMI is used to predict animal respiration. Respired CO₂ is determined as:

$$E_{CO_2,resp} = -1.4 + 0.42 M_{DMI} + 0.045 M_{BW}^{0.75} \quad [6.3]$$

where $E_{CO_2,resp}$ = emission of CO₂ from animal respiration, kg CO₂/head/day
 M_{DMI} = daily intake of feed dry matter for each animal, kg DM/head/day
 M_{BW} = animal body weight, kg.

The DMI and body weight for each animal group are available from the herd component. Dry matter intake is determined based upon the nutrient requirements (fiber, energy and protein) of a representative animal for each group within the herd and the amount and nutrient content of available feeds including pasture (See [Herd](#) section). Body weight is determined based upon animal breed, as specified by the model user, and the age and stage of lactation as simulated in the herd component.

Barn Floor Emissions

Floors of housing facilities can be a source of CO₂ emissions due to decomposition of organic matter in manure deposited by animals. Although not a major source, barn floor emissions are included to obtain a comprehensive simulation of biogenic CO₂ emissions from all sources.

Published models to predict CO₂ emissions from barn floors were not found. Using emissions data measured from manure covered floors in a free stall barn at the Penn State dairy facility ([Wheeler et al., 2008](#)), an equation was developed through regression analysis relating CO₂ emission to the ambient temperature in the barn and the manure covered floor area ($R^2 = 0.74$).

$$E_{CO_2,floor} = \max(0.0, 0.0065 + 0.0192 T) A_{barn} \quad [6.4]$$

where $E_{CO_2,floor}$ = daily rate of CO₂ emission from the barn floor, kg CO₂/day
 T = ambient temperature in the barn, °C
 A_{barn} = floor area covered by manure, m²

Equation 6.4 represents the best available information describing CO₂ emissions from barn floors. As a function of temperature, this relationship provides a simple process-based model that predicts reasonable emission rates over a full range in potential ambient barn temperatures. Because barn floor emissions are so small compared to other sources, development of a more sophisticated model was not justified at this time.

Manure Storage

Compared to other farm sources, slurry storages emit relatively low amounts of CO₂. Because of this minimal contribution to whole-farm emissions, there were no models and few data available quantifying CO₂ emissions from storages. Lack of available data, as well as the relative importance of this loss to overall farm emissions did not support the development of a detailed model. Therefore, a constant emission factor represented the best available method for predicting this emission. To determine an emission factor, emission rates were obtained from two published studies and the average was used as our emission rate ([Table 6.1](#)).

The average emission rate of 0.04 kg CO₂/m³-day is applicable to uncovered slurry storages. Covers are sometimes used to reduce gaseous emissions, but no data were available documenting the effect of covers on CO₂ emissions. To model this effect, we assumed that CO₂ emissions are reduced by a similar proportion when using a cover as found for more important gases such as ammonia. For ammonia, a cover reduces emission by about 80%, depending upon the storage dimensions ([Rotz et al., 2015](#)). Therefore, to simulate CO₂ emissions from a covered storage, the emission rate was reduced to 0.008 kg CO₂/m³-day. To represent a sealed storage where biogas is burned, the loss of CO₂ is that in the biogas produced. The total emission from this type of storage includes the CO₂ created through the combustion of CH₄ (see the following section on CH₄ emission).

Engine Combustion

During the operation of tractors and other engine powered equipment, C in fuel is transformed to CO₂, which is released in engine exhaust. The amount of CO₂ produced is proportional to the amount of fuel consumed. The emission factor used is 2.637 kg CO₂/liter of diesel fuel consumed ([Wang, 2007](#)). Fuel consumption is estimated using fuel use factors for each feed produced and the amount of manure handled (see section on [Energy Use](#)). Total fuel use is the sum of that used for producing and feeding each feed and that used in manure handling.

Methane

Methane is a strong GHG with a global warming potential around 27 times that of CO₂ (Forster et al., 2021). Multiple processes emit CH₄ from cattle operations. The majority of CH₄ is created through enteric fermentation, followed by emissions from manure storages (EIA, 2006; Chianese et al., 2009a). In addition to these major sources, smaller emissions result from field-applied manure and manure deposited by animals inside barns or on pasture. Most field studies report croplands as a negligible source, or very small sink, of CH₄ over full production years. However, field-applied manure can result in significant emissions for a few days after application. In DairyGEM, emissions from cropland are neglected except for this small emission that occurs immediately after manure application.

Enteric Fermentation

Ruminant animals subsist primarily on forages. Like most animals, ruminants do not have the enzymes necessary to break down cellulose. Instead, enteric methanogens, which exist in a symbiotic relationship with other microorganisms in the rumen, break down and obtain energy from cellulose. During this process, hydrogen is produced and can build up in the rumen, leading to acidosis, a health problem in cattle. However, these methanogens decrease the amount of hydrogen in the rumen by using the excess to reduce CO₂ to CH₄, preventing this health effect. The CH₄ produced is released to the atmosphere by eructation and respiration. The amount of CH₄ produced from enteric fermentation is impacted by various factors including animal type and size, digestibility of the feed, and the intake of dry matter, total carbohydrates, and digestible carbohydrates (Monteny et al., 2001; Wilkerson et al., 1995).

After considering the various mechanistic and empirical models available to predict enteric fermentation emissions (Wilkerson et al., 1995; Benchaar et al., 1998; and Mills et al., 2003), a relatively simple approach is used. For cows and other cattle on a relatively high forage diet, the Mitscherlich 3 (Mits3) equation developed by Mills et al. (2003) is used. Mits3 is a simplified process model that is well suited for use in whole-farm simulation. The model is based on dietary composition and is capable of accounting for management practices that alter the animal's intake and diet. Mits3 is process-based, relating CH₄ emissions to dietary intake as well as animal type and size. When compared to data from the U.S., Mits3 has yielded a regression slope of 0.89 with an intercept of 3.5 and a square root of the mean square prediction error (MSPE) of 34% (Mills et al., 2003). In addition, Mits3 predicts realistic emissions at the extremes of the parameter ranges. With zero feed intake, the model predicts zero CH₄ production; at the other extreme of very high feed intake, the nonlinear model predicts that CH₄ emission approaches a maximum. Thus, the model can be applied to conditions outside those for which it was originally developed without predicting unreasonable emissions.

Three model inputs are required: starch content of the diet, acid detergent fiber (ADF) content of the diet, and metabolizable energy intake. These inputs are readily obtained from the feed and animal components of DairyGEM. Through these inputs, CH₄ production is directly related to diet and indirectly related to animal size and type. This allows prediction of changes in CH₄ production as affected by changes in animal nutrition and management. A detailed description of the selected model can be found in Mills et al. (2003).

Enteric emission of CH₄ is predicted as:

$$E_{CH4,ent} = [E_{max} - E_{max} e^{(-c \cdot MEI)}] F_{kgCH4} \quad [6.5]$$

where $E_{CH4,ent}$ = emission due to enteric fermentation, kg CH₄ /head-day

E_{max} = maximum possible emission, MJ CH₄ /head-day

c = shape parameter for how emissions change with increasing MEI , dimensionless

MEI = metabolizable energy intake, MJ/head-day

F_{kgCH4} = conversion of MJ to kg of CH₄, 0.018 kg CH₄ /MJ

From Mills et al. (2003), the maximum possible emission is defined as 45.98 MJ CH₄ / head-day. This maximum possible emission is constant for all animals; the effect of animal size and type is indirectly provided through the value of MEI . The shape parameter, c , is calculated as:

$$c = -0.001 (Starch / ADF) + 0.0045 \quad [6.6]$$

where $Starch$ = starch content of the diet, fraction

ADF = acid detergent fiber content of the diet, fraction

Equation 6.5 models the observed trend of increased CH₄ emission with high fiber diets and decreased emission with high starch diets.

To use the above equations, values are needed for the starch and ADF contents of diets and the metabolizable energy intake of animal groups making up the herd. The herd component determines the ration that each animal group

is fed based upon a representative animal's nutritional requirements and the available feeds (See [Herd](#) and [Feed](#) Sections). This information includes the required energy content of the diet [MJ/kg DM], the total dry matter intake [kg DM/day/head], and the amount of each feed used. The first two parameters are used to calculate M_{EI} . The ADF contents of feeds are determined assuming a linear relationship with neutral detergent fiber (NDF) for each feed type ([Table 6.2](#)). These relationships were developed using feed composition data from the National Research Council ([NRC, 2001](#)). The starch contents of feeds are determined assuming a linear relationship with the amount of non fiber carbohydrate (NFC) in the feed ([Table 6.2](#)). The fraction of NFC is determined as:

$$F_{NFC} = 1 - (F_{NDF} + F_{CP} + F_{fat} + F_{ash}) \quad [6.7]$$

where F_{NFC} = fraction of NFC in the diet
 F_{CP} = fraction of crude protein (CP) in the diet
 F_{fat} = fraction of fat in the diet
 F_{ash} = fraction of ash in the diet.

The fractions of NDF and CP are available in the herd component; typical fractions of fat and ash ([Table 6.2](#)) were obtained from the National Research Council ([NRC, 2001](#)). A given animal group is typically fed a mixture of feeds making up the whole diet. A weighted average of the individual feed characteristics in the ration is used to determine the starch and ADF contents of the full ration fed to each of the six possible animal groups making up the herd.

For cattle on feedlots, empirical equations from NASEM (2016) were used. For backgrounding cattle on a high forage diet, enteric methane was determined as:

$$E_{CH4,ent} = 71.5 + 0.12 (BW) + 0.01 (DMI)^3 - 244.8 (FAT) \quad [6.8]$$

For finishing cattle on a low forage diet, the following relationship was used:

$$E_{CH4,ent} = 10.1 + 0.21 (BW) + 0.36 (DMI)^2 - 0.69.2 (FAT) + 13. (F_{NDF}/F_{CP}) - 4.9 (F_{CP}/F_{CP}) \quad [6.12]$$

where BW = Body weight of animal, kg
DMI = Dry matter feed intake, kg/day
FAT = Fat fed in animal diet, kg/day

Predicted daily emissions are summed over all cattle and days on the feedlot to obtain annual emissions.

Housing Emissions

Manure on housing facility floors is also a small source of CH₄. No published model or data were found for this emission source. Therefore, unpublished CH₄ emission data measured from free stall barn floors ([Wheeler et al., 2008](#)) were used to develop an empirical equation relating CH₄ emission to the ambient temperature in the barn ($R^2 = 0.48$). The resulting model is:

$$E_{CH4,floor} = \max(0.0, 0.13 T) \cdot A_{barn} / 1000 \quad [6.9]$$

where $E_{CH4,floor}$ = daily rate of CH₄ emission from the barn floor, kg CH₄ /day
 T = ambient barn temperature, °C
 A_{barn} = area of the barn floor covered with manure, m²

This relationship represents the best available information describing CH₄ emissions from free stall and tie stall barn floors. The temperature dependence of CH₄ production is well-documented ([Zeikus and Winfrey, 1976](#); [van Hulzen et al., 1999](#)). This simple relationship predicts reasonable emission rates for ambient temperatures of 0°C and greater.

When manure is allowed to accumulate into a bedded pack, CH₄ emissions are increased. For this management option, an adaptation of the tier 2 approach of the IPCC (2006) is used. Emission on a given day is determined as a function of the ambient barn temperature and a methane conversion factor (MCF).

$$E_{CH4,floor} = VS (B_m) (0.67) (MCF) / 100 \quad [6.10]$$

where $E_{CH4,floor}$ = daily CH₄ emission, kg CH₄ /day
VS = volatile solids excreted in manure, kg VS
 B_m = maximum CH₄ producing capacity for cattle manure, 0.24 m³ CH₄ /kg VS
0.67 = conversion factor of m³ CH₄ to kg CH₄
MCF = CH₄ conversion factor for the manure management system, %.

MCF is modeled as an exponential function of ambient barn temperature through a regression of the data provided by the [IPCC \(2006\)](#):

$$MCF = 7.11 e^{0.0884(T_b)} \quad [6.11]$$

where T_b = ambient barn temperature, °C

MCF is limited to a minimum value of 0 and maximum of 80.

In warm dry climates, animals are often housed in open, non vegetated areas normally referred to as open lots. Manure typically accumulates on the soil surface for weeks or months before being removed. To predict emissions from this surface, the tier 2 approach of [IPCC \(2006\)](#) is again used. Based upon the IPCC (2006) data, MCF was modeled as a linear relationship with ambient outdoor temperature:

$$MCF = 0.0625 T_a - 0.25 \quad [6.12]$$

where T_a = ambient temperature, °C

MCF is limited to a minimum value of 0. In systems that combine free stall and open lot housing, the assumption is made that half of the manure is deposited in free stall allies with the remainder deposited on the open lot. The total emission from housing facilities is then the sum of the two sources modeled using the appropriate relationships.

Manure Storage

During manure storage, CH_4 is generated through a reaction similar to that described for enteric fermentation. The cellulose in the manure is degraded by microbes, with products of this process serving as substrates for methanogenesis. Temperature and storage time are the most important factors influencing CH_4 emissions from stored manure because substrate and microbial growth are generally not limited ([Monteny et al., 2001](#)). Although the processes are similar, there are important differences between the rumen and manure storage. The temperature in the storage varies, in contrast to the relatively constant temperature in the rumen, and the manure in storage is more heterogeneous (e.g., the substrate is less well mixed and some carbohydrates are already partially decomposed) as compared to the consistency of the rumen ([Monteny et al., 2001](#)).

As with enteric fermentation, both mechanistic and empirical models have been developed to predict CH_4 emissions from manure storages. Unlike some of the empirical enteric fermentation models that simply use statistical correlations, the majority of empirical manure storage models are biologically based. After considering two mechanistic ([Hill, 1982](#); and [García-Ochoa et al., 1999](#)) and four empirical models ([Chen and Hashimoto, 1980](#); [Hill, 1991](#); [Zeeman, 1994](#); and [Sommer et al., 2004](#)), the model of [Sommer et al. \(2004\)](#) was selected as the most appropriate approach for our application. Their model employs commonly used empirical relationships (e.g., Arrhenius relationship) that are more general and thus more applicable to conditions outside of which they were developed. Unlike most of the other models, the model of [Sommer et al. \(2004\)](#) was developed for more general application to either digested or untreated slurry manure.

The model of [Sommer et al. \(2004\)](#) simulates the production and emission of CH_4 from manure storages based upon the degradation of volatile solids (VS). Additional factors affecting CH_4 production are temperature and storage time. Some extension of their model was done to better fit the needs of our simulation. Whereas their model was developed to predict emission based upon the volatile solids entering storage, we modified the relationship to determine the emission rate as a function of the volatile solids contained in the manure storage on any given day. The emission rate from a slurry storage with a crust on the surface is given by:

$$E_{CH_4,man} = 0.024 VS_T (VS_d \cdot b_1 + VS_{nd} \cdot b_2) \exp[\ln(A) - (E/RT)] \quad [6.13]$$

where $E_{CH_4,man}$ = emission of CH_4 from the storage, kg CH_4 /day

VS_T = VS contained in the storage on a given day, kg

VS_d and VS_{nd} = degradable and nondegradable VS fractions in the manure, kg/kg VS

b_1 and b_2 = rate correcting factors, dimensionless

A = Arrhenius parameter, g CH_4 /kg VS-h

E = apparent activation energy, J/mol

R = gas constant, J/K/mol

T = temperature, °K

Values used for these parameters are listed in [Table 6.3](#).

The portion of degradable volatile solids in the storage is the difference between that loaded into the storage and that lost from the storage where all of that lost is assumed to be in a degradable form. From [Sommer et al. \(2004\)](#), the degradable fraction of the VS can be determined from the potential methane yield and the achievable emission:

$$VS_d = VS_{in} (B_o / E_{CH_4,pot}) - VS_{loss} / VS_T \quad [6.14]$$

where VS_{in} = VS loaded into the storage up to the given day, kg

VS_{loss} = VS lost from the storage up to the given day, kg

B_o = achievable emission of CH₄ during anaerobic digestion, kg CH₄/kg VS

$E_{CH_4,pot}$ = potential CH₄ yield of the manure, kg CH₄/kg VS

$E_{CH_4,pot}$ can be estimated using Bushwell's equation and the carbohydrate, fat, and protein contents of the manure. For cattle slurry, [Sommer et al. \(2004\)](#) defined B_o as 0.2 kg CH₄ / kg VS and $E_{CH_4,pot}$ as 0.48 kg CH₄ / kg VS.

Total VS in the manure storage at any point in time is the difference between that entering the storage and that lost from the storage up to that point. The amount entering is determined from the manure mass removed from the barn and the total solids and VS contents of that manure:

$$VS_T = M_{manure} \cdot P_{TS} \cdot P_{VS} - VS_{loss} \quad [6.15]$$

where M_{manure} = accumulated mass of manure entering the storage, kg

P_{TS} = total solids content in the manure, kg TS / kg manure

P_{VS} = fraction of VS in the total solids, kg VS / kg TS ([Table 6.3](#))

VS_{loss} = accumulated VS loss, kg.

To obtain a similar rate of VS loss as that reported by [Sommer et al. \(2004\)](#), this loss was predicted as three times the methane loss from the stored manure. The fraction of nondegradable volatile solids is determined using a mass balance:

$$VS_{nd} = VS_T - VS_d \quad [6.16]$$

The inputs required are the mass and temperature of the manure in storage. The amount of manure in storage is the accumulation of that produced by the herd while in the barn with daily manure excretion determined in the animal component (See [Manure DM and Nutrient Production](#) section). The temperature of the manure in storage on a given simulated day is estimated as the average ambient air temperature over the previous ten days.

This predicted storage emission is for an uncovered, bottom-loaded storage of slurry (7 - 12% DM) manure where a crust forms on the surface. For a top-loaded tank or with manure containing less DM, this emission rate is increased 60% ([IPCC, 2006](#)). Storage covers are sometimes used to reduce emissions. With a non-sealed cover, the emission rate is reduced to 50% of that occurring from the open storage. A more tightly sealed cover or enclosed storage can be used where the biogas produced is burned to convert the emitted CH₄ to CO₂. This technique greatly reduces the emission of CH₄, although it does increase the emission of CO₂ through the combustion of CH₄. To simulate this storage treatment, the emission of CH₄ from an enclosed manure storage is calculated as:

$$E_{CH_4,cov} = E_{CH_4,man} (1 - \eta_{eff}) \quad [6.17]$$

where $E_{CH_4,cov}$ = CH₄ emitted from the enclosed manure storage, kg CH₄ /day

$E_{CH_4,man}$ = CH₄ emission from the storage with no cover using equation 6.13, kg CH₄ /day

η_{eff} = efficiency of the collector, dimensionless

The efficiency of the collector and flare is assumed to be 90%. The subsequent flaring of the captured CH₄ releases CO₂, which adds to the overall farm emission of this gas. Assuming complete combustion, the additional emission of CO₂ from the combustion of CH₄ is calculated as:

$$E_{CO_2,flare} = 2.75 E_{CH_4,cov} \quad [6.18]$$

where $E_{CO_2,flare}$ = emission of CO₂ from the combustion of captured CH₄, kg CO₂ /day

2.75 = ratio of the molecular weights of CO₂ and CH₄.

Semi-solid (8-14% DM) and solid manure (>15% DM) can be stored in stacks. Methane emission from this type of storage is modeled as described in the [manure composting section](#). For both static piles and turned windrows, a dynamic process model tracks C transformation and emission through multiple layers on a daily time-step ([Bonifacio](#)

[et al. 2017a, 2017b](#)). Processes include CH₄ fermentation, which converts CO₂-C to CH₄-C, and CH₄ oxidation, which oxidizes CH₄-C to CO₂-C. Daily emissions are summed over the storage period to obtain annual emissions.

Field-Applied Manure

Research has shown that field-applied slurry is a source of CH₄ for several days after application, emitting between 40 to 90 g CH₄/ha-day ([Sommer et al., 1996](#); [Chadwick and Pain, 1997](#); [Sherlock et al., 2002](#)). Emissions drastically decrease within the first few days, and the soil returns to a neutral source of CH₄ by 11 days ([Sherlock et al., 2002](#)).

[Sherlock et al. \(2002\)](#) related CH₄ emissions from field-applied slurry to the volatile fatty acids (VFAs) concentration in the soil. Because the VFAs in the soil are due to the application of the slurry ([Sherlock et al., 2002](#)), their model is used to relate CH₄ emissions to the VFA concentration in the slurry. Emission of CH₄ from field-applied slurry is predicted using the following derived empirical relationship:

$$E_{CH_4,app} = (0.170 F_{VFA} + 0.026) 0.032 A_{man} / r_{app} \quad [6.19]$$

where $E_{CH_4,app}$ = emission of CH₄ from field-applied slurry, kg CH₄ /day
 F_{VFA} = daily concentration of VFAs in the slurry, mmol /kg slurry
 A_{man} = amount of manure applied, kg
 r_{app} = application rate, kg/ha

[Sherlock et al. \(2002\)](#) found that the daily VFA concentration exponentially decreased in the days following the application of manure slurry and approached background levels within approximately four days. Using this information, we derived a relationship predicting the daily concentration of VFA in the field-applied slurry:

$$F_{VFA} = F_{VFAi} e^{-0.6939 t} \quad [6.20]$$

where F_{VFA} = daily concentration of VFAs in the slurry, mmol /kg slurry
 F_{VFAi} = initial VFA concentration in the slurry at application, mmol /kg slurry
 t = time since application with $t = 0$ representing the day of application, day

Paul and Beauchamp ([1989](#)) developed an empirical model relating the pH of manure slurry to VFA and total ammoniacal nitrogen (TAN) concentrations:

$$pH = 9.43 - 2.02 - [F_{VFAi} / F_{TAN}] \quad [6.21]$$

where pH = pH of the manure slurry, dimensionless
 F_{TAN} = concentration of TAN (NH₄⁺ + NH₃) in the slurry, mmol /kg slurry

Rearranging Equation 6.21, we obtained an equation to predict the initial concentration of VFAs based on the pH and TAN content of the manure slurry:

$$F_{VFAi} = (F_{TAN} / 2.02) (9.43 - pH) \quad [6.22]$$

To predict emissions from field applied manure, equation 6.22 was used to determine an initial VFA concentration and equation 6.20 was used to track the VFA concentration through time following field application. Using this concentration, an emission rate was determined until the remaining VFA concentration approached zero.

Grazing Animals

On farms that incorporate grazing for at least a portion of the year, freshly excreted feces and urine are directly deposited by animals on pastures. Studies have shown that feces are a small source of CH₄ and that emissions from urine are not significantly different from background soil emissions (e.g., [Jarvis et al., 1995](#); [Yamulki et al., 1999](#)). Because animal-deposited feces contribute only minimally to overall farm CH₄ emissions, there are few data quantifying these emissions.

Due to the lack of supporting data and the relatively low importance of this emission source, a constant emission factor is used to predict CH₄ from the feces deposited by grazing animals. To determine this emission factor, emission rates were obtained from four published studies and the average (0.086 g CH₄ /kg feces) was used for our emission rate ([Table 6.4](#)). Therefore, for grazing systems, the daily emission of CH₄ is predicted as the product of this emission rate and the daily amount of feces deposited by grazing animals.

Nitrous Oxide

Nitrous oxide is the strongest of all greenhouse gases emitted in agricultural production with a global warming potential about 273 times that of CO₂ (IPCC, 2007). In 2005, agriculture had the greatest overall impact on N₂O emissions, contributing 78% of the U.S. total (EIA, 2006). In fact, this contribution has become increasingly important, with reported emissions increasing by 10% between 1990 and 2005 (EIA, 2006). Multiple sources emit N₂O on cattle operations. The majority is emitted from soil, followed by manure storages, with relatively small amounts emitted from manure in bedded pack barns or open lots (Groenestein and Van Faasen, 1996; EPA, 2008).

Cropland Emissions

Croplands are the largest source of N₂O emitted from farms. Although undisturbed soils emit N₂O naturally, the rate of emission from cultivated soils is much greater because of the greater N inputs. Two pathways can lead to emissions of N₂O: denitrification and nitrification. Denitrification is the microbial reduction of NO₃ to N₂ under anaerobic conditions, with the production of NO and N₂O as intermediates (Figure 6.1). Nitrification is an aerobic process that oxidizes NH₄⁺ to NO₃, with the production of NO and N₂O as intermediates (Figure 6.2). A conceptual model published by Davidson et al. (2000) describes how denitrification and nitrification are connected (Figure 6.3). This model, known as the “hole-in-the-pipe” (HIP) model, connects the two pathways and thus links the emission of NO and N₂O (Davidson et al., 2000).

To simplify the model, soil processes are not simulated in DairyGEM. Therefore, a relatively simple emission factor approach had to be used to estimate N₂O emissions in the production of feeds. Based upon the recommendation of the IPCC (2007), the N₂O-N emission from cropland is set at 1% of the N applied and that from pasture land is set at 2% of applied N. Since crop production is not simulated, N applied is set as 40% greater than that removed in harvested feed. This approach assumes relatively efficient use of N fertilizer in producing the feed crops. The over application of 40% allows for the loss of N that naturally occurs when N is applied at a recommended rate to meet nutrient removal. To predict N application, the total N in the feed consumed by the herd is determined as the sum of the DM for each feed consumed times the protein content divided by 6.25. This N is increased by 40% and multiplied by the appropriate emission factor and an N to N₂O conversion factor of 1.57. The N deposited in pasture is proportioned by the time animals spend in the pasture, which is a function of the grazing system used. When animals are maintained outdoors all year, 85% of excreted N is applied to pastureland.

This approach was evaluated by comparing predicted emissions from this simple model to those predicted by a more complex process-based approach in the Integrated Farm System Model (IFSM, Rotz et al., 2015). In general, average annual values predicted by the two approaches were similar even though this simple approach did not account for differences in soil type and climate conditions. To account for the effect of soil texture and density, an adjustment was added to increase the emission in clay soil and reduce the emission in sandy soils. This adjustment was set to better represent the predictions using the dynamic soil model of IFSM. For further control over this factor, an adjustment was added to allow the model user to increase or decrease soil N₂O emission to align the model with known data from other sources.

Barn Emissions

Free Stall and Tie Stall Barns

Manure on the floors of free stall and tie stall barns appears to be a negligible source of N₂O emission. Based upon limited available data, the emission of N₂O is modeled as zero from the floors of these facilities where manure is typically removed on a daily basis (Chianese et al., 2009b).

Open Lot Facilities

For open lots, prediction of N₂O emissions involves simulation of other processes that affect the nitrogen balance and forms in the manure pack. These processes include mineralization, nitrification, denitrification and leaching. Urine N hydrolyzes and manure organic N mineralizes to form NH₄⁺. Through nitrification, NH₄⁺ is converted to NO₃⁻, which can undergo leaching and denitrification. Based on the Nitrate Leaching and Economic Analysis Package (NLEAP) model (Shaffer et al., 1991), the mineralization rate of manure organic N is a function of temperature, moisture content and a mineralization rate coefficient. Using the experimental data by Pratt and Castellanos (1981), the derived daily mineralization rate coefficient for cattle manure is set at 0.052/day. Hydrolyzed urine N that infiltrates the manure pack (see Ammonia Emission - Open lots section) undergoes nitrification. Modeling of nitrification, denitrification and leaching processes are based on relationships from the DAYCENT model (DAYCENT, 2007).

DAYCENT is process-based, accounting for how management scenarios affect the moisture content, pH, soil ammonium and nitrate concentrations and gaseous N emissions for croplands. Detailed documentation of the N₂O module of DAYCENT can be found in Del Grosso et al. (2000) and Parton et al. (2001). Some relationships have been modified for open lot predictions. This section provides a brief description of the relationships as incorporated in

DairyGEM.

Emission of N₂O from the manure pack is predicted as the sum of nitrification and denitrification losses:

$$E_{N_2O,soil} = E_{N_2O,soil,N} + E_{N_2O,soil,D} \quad [6.23]$$

where $E_{N_2O,soil}$ = total emission of N₂O from the manure pack, kg N₂O/ha-day

$E_{N_2O,soil,N}$ = emission due to nitrification, kg N₂O/ha-day

$E_{N_2O,soil,D}$ = emission due to denitrification, kg N₂O/ha-day

Emission from nitrification is predicted as:

$$E_{N_2O,soil,N} = K_2 \cdot R_{NO_3} \cdot F_{N,conv} \quad [6.24]$$

where K_2 = fraction of nitrified N lost as N₂O flux, g N/g N

R_{NO_3} = nitrification rate, g N/m²- day

$F_{N,conv}$ = conversion factor, 15.7 (kg N₂O/ha-day)/(g N/m²- day)

[Parton et al. \(2001\)](#) defined K_2 as 0.02 g N flux/g N nitrified. The equation used for computing the nitrification rate in the manure pack, R_{NO_3} , is:

$$R_{NO_3} = K_{max} \cdot N_{NH_4} \cdot F_{wfp} \cdot F_{ph} \quad [6.25]$$

where K_{max} = maximum fraction of ammonium concentration nitrified

N_{NH_4} = ammonium concentration in the manure pack, g N/m²-day

F_{wfp} = factor for the effect of manure pack moisture, dimensionless

F_{ph} = factor for the effect of manure pack pH, dimensionless

The effects of manure pack moisture and pH on the nitrification rate are computed using relationships described in [Parton et al. \(1996\)](#). Unlike the model described by [Parton et al. \(2001\)](#), the effect of temperature on nitrification is not considered because a relationship was not established between manure pack temperature and nitrification for open lots ([Woodbury et al., 2001](#)). The K_{max} is set to 0.40 based on a feedyard soil experiment ([Stewart, 1970](#)). Nitrification is also predicted for the first 3 upper layers only (see [Ammonia Emission - Open lots](#) section). Because there is no NH₄⁺ source for the lower layer (100-cm depth) and NH₄⁺ in the upper layers does not leach, it is assumed that no nitrification occurs in the lower layer.

For both upper and lower soil layers, emission of N₂O due to denitrification is predicted as:

$$E_{N_2O,soil,D} = [(\min(F_{d,NO_3} \cdot F_{d,CO_2}) \cdot F_{d,WFPS}) / (1 + R_{Nratio})] \rho_{soil} \cdot d_{soil} \cdot F_{N,mass} \quad [6.26]$$

where $E_{N_2O,soil,D}$ = emission of N₂O from the manure pack, kg N₂O/ha-day

F_{d,NO_3} = factor for the effect of manure pack nitrate concentration, µg N/g soil-day

F_{d,CO_2} = factor for the effect of respiration in the manure pack, µg N/g soil-day

$F_{d,WFPS}$ = factor for the effect of manure pack moisture, dimensionless

R_{Nratio} = ratio of N₂ to N₂O emission, µg N/µg N

ρ_{soil} = bulk density of the manure, g/cm³

d_{soil} = active depth of layer simulated (upper, lower), cm

$F_{N,mass}$ = unit conversion factor, 0.157 (kg N₂O/ha-day)/(µg N/cm²-day)

Similar to the model of [Parton et al. \(1996\)](#), the effect of nitrate concentration on the N₂O flux due to denitrification, F_{d,NO_3} , is calculated using an arctangent function ([DAYCENT, 2007](#)). The nitrate concentration for the upper layer is estimated from the amount of nitrified N (equation 6.25) and for the lower layer, is estimated from the amount of nitrate that leached from the upper layers to the lower layer (equation 6.35). The effect of soil respiration on the N₂O flux due to denitrification, F_{d,CO_2} , is predicted as ([Parton et al., 2001](#)):

$$F_{d,CO_2} = 0.1 (C_{CO_2})^{1.3} \quad [6.27]$$

where C_{CO_2} = CO₂ flux in the feedyard soil layer, µg C/g soil.

The model of [Parton et al. \(2001\)](#) assumes that denitrification does not occur at a soil moisture below approximately 55%. Above 55%, denitrification increases exponentially and asymptotically approaches a maximum as soils approach saturation. This effect is predicted as:

$$F_{d,WFPS} = 0.45 + \arctan [0.6 \pi (0.1 w_{wfps} - a)] / \pi \quad [6.28]$$

where w_{wfps} = water-filled pore space, percent

a = factor controlling soil moisture content where denitrification is half the maximum rate

$\arctan$ = arctangent function, radians

Parameter a is calculated as:

$$a = 9.0 - M C_{CO_2} \quad [6.29]$$

$$M = 0.145 - 1.25 \cdot \min(0.113, D_{fc}) \quad [6.30]$$

where M = interaction between soil moisture and respiration, dimensionless

D_{fc} = gas diffusivity coefficient, dimensionless

As in DAYCENT ([Del Grosso et al., 2000](#)), the ratio of gas diffusivity in the manure pack to gas diffusivity in the air, D_{fc} , is computed using the method described by [Potter et al. \(1996\)](#).

The ratio of N_2 to N_2O , R_{Nratio} , is predicted as:

$$R_{Nratio} = F_{r,NC} \cdot F_{r,WFPS} \quad [6.31]$$

where $F_{r,NC}$ = ratio of electron donor (NO_3) to substrate (CO_2), dimensionless

$F_{r,WFPS}$ = effect of manure pack moisture on the relative emissions of N_2 and N_2O , dimensionless

DAYCENT uses empirical equations to model $F_{r,NC}$ and $F_{r,WFPS}$. The effect of the ratio of NO_3 to CO_2 is predicted as:

$$F_{r,NC} = \max[(0.16 K_I), (K_I e^{-0.8r})] \quad [6.32]$$

$$K_I = \max[1.7, (38.4 - 350 \cdot D_{fc})] \quad [6.33]$$

where K_I = intercept of $F_{r,NC}$, dimensionless

r = ratio N_{NO_3} to C_{CO_2} , g N/g C

The effect of manure pack moisture is predicted as:

$$F_{r,WFPS} = \max[0.1, (0.015 w_{wfps} - 0.32)] \quad [6.34]$$

Leaching affects the amount of nitrate available for denitrification. The fraction of the total nitrate that leached from a layer is a function of the nitrate concentration, the texture of the layer, the amount of water leached, and empirical parameters from DAYCENT:

$$N_{leach} = 0 \quad \text{when } W_{leach} = 0 \quad [6.35]$$

$$N_{leach} = N_{NO_3} \cdot K_{texture} \cdot F_{leach} \quad \text{when } W_{leach} > 0$$

$$K_{texture} = 0.6 + 0.2 \cdot F_{sand} \quad [6.36]$$

$$F_{leach} = \min[1.0, 1.0 - ((CF_{leach} - W_{leach}) / CF_{leach})] \quad [6.37]$$

where N_{leach} = amount of nitrate leached from a layer, g N/m²- day

W_{leach} = water drained from the manure pack or soil layer, mm

$K_{texture}$ = effect of soil texture on leaching, dimensionless

F_{sand} = sand content, decimal

F_{leach} = leaching intensity, dimensionless

CF_{leach} = critical water flow for nitrate leaching, mm

The WF_{leach} is calculated using the soil water model described for open lots (see [Ammonia Emission - Open lots](#) section). The CF_{leach} is set to 1.0 mm for the upper layers and to 3.0 mm for the lower layer. In calculating nitrate leaching, the lowest layer (100-cm depth) is subdivided into five sublayers with depths of 10, 15, 15, 30 and 30 cm. The total N leaching loss reported by the model is the amount of nitrate that leached through the lowest sublayer.

To implement the above equations, input values are needed for soil bulk density, CO_2 flux, water-filled pore space, air-filled pore space, and total porosity. Bulk density and total porosity are both constants for an open lot simulation (see [Ammonia Emission - Open lots](#) section). Water-filled pore space is calculated using the open lot soil water model

(see [Ammonia Emission - Open lots](#) section). Air-filled pore space is calculated from water-filled pore space and total porosity. Relationships have been developed using the Integrated Farm System Model ([Rotz et al., 2015](#)), which has a component for predicting CO₂ flux based on [DAYCENT \(2007\)](#), to approximate maximum CO₂ fluxes in both upper and lower layers of the manure pack. In the relationships developed, the maximum CO₂ flux is a function of the amount of fecal organic *N* in the manure pack, number of animals, and type of facility (i.e., dairy open lots with 60.0 m² per cow). On each simulation day, the flux computed for each layer is multiplied by a factor to account for temperature, moisture and rain effects on respiration ([DAYCENT, 2007](#)). For the amount of fecal organic *N*, it is assumed that there is an average 3-month accumulation of manure on open lots.

Bedded Pack Barns

Bedded pack barns are modeled similar to open lots with some important differences. Temperature of the bedded pack is modeled because of its influence on *N* transformations, and consequently N₂O emissions. Even without aeration, microbial decomposition (also referred to as organic matter mineralization) taking place in a deep-bedded pack is high enough to raise bedded pack temperatures above ambient levels. As an example, [Spiehs et al. \(2011\)](#) reported average bedded pack temperatures of 15°C, 19°C, and 29°C for periods with barn air temperatures of < 0°C, 0°C to 20.6°C, and > 20.6°C, respectively, which corresponded to average temperature differences between the bedded pack and barn air of 18°C, 7°C, and 5°C, respectively. Compared to open lots, bedded pack barns have a greater potential for organic C and N mineralization because of wetter conditions and additional carbon from bedding.

In predicting *N* transformations and N₂O emissions for bedded pack barns, the equations for mineralization, nitrification, denitrification, and leaching in soil are used (equations 6.23 to 6.37). Both mineralization ([Shaffer et al., 1991](#)) and nitrification (equation 6.25) are functions of temperature. Through these two processes, temperature can affect the amount of nitrate *N* available for both denitrification and leaching.

For compost barns, temperature at the surface of the bedded pack is similar to ambient air temperature while temperature within does not vary significantly with depth ([Barberg et al., 2007](#)). Bedded pack barns would likely have similar temperature profiles. Using simulated 33-cm deep non-aerated bedded packs, [Ayadi et al. \(2015c\)](#) reported that median temperatures varied with depth by 1.2°C or less. Therefore, in modeling temperature, the bedded pack is simulated as two layers: the surface layer (i.e., 1 cm depth) and the rest of the bedded pack. The depth of the bedded pack is approximated from amounts and properties of manure excreted and bedding applied. Similar to open lots, it is assumed that there is a 3-month accumulation of manure and bedding on bedded pack barns throughout the year, and the manure C/N ratio is set at 15.

The temperature model for bedded pack barns is adapted from [Cekmecelioglu et al. \(2005\)](#). On a daily time step, bedded pack temperature is computed by considering heat gain from microbial decomposition and heat losses due to evaporation and convection. As bedded pack barns are covered structures, net heat gain or loss due to radiation is neglected. Calculation of heat gain requires the amount of C respired as CO₂-C. Evaporation heat loss is the product of the amount of water evaporated and the latent heat of evaporation ([Cekmecelioglu et al., 2005](#)). Following [Cekmecelioglu et al. \(2005\)](#), convection heat loss is a function of the temperature difference between the bedded pack and ambient air. But since the model described by [Cekmecelioglu et al. \(2005\)](#) is limited to above freezing ambient conditions only, another approach is used in calculating convection heat loss for periods with freezing ambient conditions. In simulating these periods, convection heat loss is estimated through iteration, which involves the following steps: 1) a step heat transfer of 1 MJ from the bedded pack to the surface layer is applied; 2) based on [Barberg et al. \(2007\)](#), heat loss from the surface layer to the atmosphere is simulated until the surface layer temperature is equal to ambient air temperature + 1°C; and 3) the iteration cycle is repeated until the temperature difference between the surface layer and the rest of the bedded pack is less than 20°C. Convection heat loss from this procedure, which is just the sum of all simulated heat losses in step 2, is lower than the corresponding value based on [Cekmecelioglu et al. \(2005\)](#). The 20°C temperature difference criterion in step 3 is based on temperature observations by [Spiehs et al. \(2011\)](#).

As particle density is an important parameter in modeling moisture contents ([Jones and Kiniry, 1986](#)), it can affect simulation of bedded pack temperature through amounts of moisture that can be potentially evaporated and calculated thermal properties of the bedded pack. In the absence of published values appropriate for each manure-bedding material combination simulated, particle density used in simulating the bedded pack is calculated on the first day of each simulation year:

$$\rho_p = \rho_{w,i} / (1 - PO_{air}) \quad [6.38]$$

where ρ_p = particle density, g/cm³
 $\rho_{w,i}$ = initial wet bulk density, g/cm³
 PO_{air} = air-filled porosity, fraction

The $\rho_{w,i}$ value is approximated from amounts of manure, bedding, and moisture in the bedded pack. At the start of a

simulation, a 65% wet-based moisture content is assumed based on yearly averages by [Spiehs et al. \(2011\)](#) and [NRCS South Dakota \(2011\)](#). The PO_{air} is initially set to 0.45, which is approximated from gas pore measurements by [Ayadi et al. \(2015b\)](#) for simulated bedded packs. The computed ρ_p is held constant throughout the simulation year.

Similar to open lots, C balance in bedded pack barns is not completely simulated in DairyGEM, i.e., simulation of CO_2 -C respiration is not included in the model. Still, in order to simulate N decomposition/mineralization, the amount of C decomposed is simulated following the procedure in the NLEAP model (i.e., equations 10 to 14 of [Shaffer et al. \(1991\)](#)). For bedded packs, daily mineralization rate coefficients for manure and bedding are computed as functions of temperature:

$$K_{manr}, K_{resr} = x_l [1.066^{(T_{bp}+20)} - 1.21^{(T_{bp}-20)}] \quad [6.39]$$

where K_{manr}, K_{resr} = mineralization rate coefficients for manure and bedding, respectively, 1/day
 x_l = effectiveness of decomposition rate, dimensionless
 T_{bp} = bedded pack temperature, °C

Equation 6.39 is based on [Haug \(1993\)](#) modified to have the maximum decomposition rate at 30°C. This modification is made to have simulated bedded pack temperatures agree with measurements by [Spiehs et al. \(2011\)](#). Assuming that the decomposition rate for manure is four times that for bedding, x_l is set to 1.35×10^{-3} for manure and 3.58×10^{-4} for bedding through refinement using measurements from simulated bedded packs ([Ayadi et al., 2015b](#)). Because K_{manr} and K_{resr} already account for effects of temperature on decomposition, the temperature factor (TFAC) in equation 11 of [Shaffer et al. \(1991\)](#) is not used in calculating C and N decomposition rates. With a slower decomposition rate for bedding, most of organic N that decomposes comes from manure and is approximated from decomposed manure C using a C/N ratio of 15. In simulating decomposition, a microbial C/N ratio requirement of 23.8 is assumed ([Shaffer et al., 1991](#)). Given that microbial C/N ratio is greater than manure C/N ratio (i.e., N microbial requirement < N decomposed), some of the decomposed N stays as NH_4^+ and becomes available for nitrification.

Nitrification for bedded packs is computed using equation 6.25 but with another factor accounting for effects of temperature on nitrification (F_{temp}). Adapted from [DAYCENT \(2007\)](#), the equation for F_{temp} , refined using ammonium concentration data by [Ayadi et al. \(2015b\)](#), is given by:

$$F_{temp} = (-25^\circ C - T_{bp})/(-60^\circ C)^{1.5} \times \exp[(1.5/18)(1 - ((-25^\circ C - T_{bp})/(-60^\circ C))^{18})] \quad [6.40]$$

With equations 6.39 and 6.40 incorporated in simulating decomposition (i.e., using NLEAP equations, [Shaffer et al. \(1991\)](#)) and nitrification (i.e., equation 6.25 with F_{temp}), respectively, the model was able to predict the profile of ammonium concentration with time for simulated bedded packs at both low (10°C) and high (40°C) ambient temperature conditions ([Ayadi et al., 2015b](#)). Assuming that trends of NH_4^+ -N/ NO_3^- -N ratio for bedded packs are comparable to those for compost barns ([Shane et al., 2010](#)) (i.e., average NH_4^+ -N/ NO_3^- -N ratios of 267 and 608 for summer and winter conditions, respectively), K_{max} in equation 6.25 is set to 2.67×10^{-4} for bedded packs.

Denitrification, and leaching are simulated using the same expressions used for open lots ([Bonifacio et al., 2015](#)). However, the leaching routine is slightly revised for bedded pack barns such that nitrate within the bedded pack can move in both downward and upward directions depending on simulated water movement, and no nitrate leaches out of the bedded pack based on the assumption that the bedded pack barn is built with an impermeable floor (e.g., concrete slab, lining).

Simulation of bedded pack temperatures (i.e., heat generation) and denitrification requires CO_2 flux. Similar to open lots, relationships have been developed for predicting maximum CO_2 fluxes for bedded pack barns. Derived using the Integrated Farm System Model ([Rotz et al., 2015](#)), a more detailed process-based model, the maximum CO_2 flux is a function of several parameters that include bedding type, bedding amount, total amount of organic C in the bedded pack, and type of facility (dairy bedded pack barns with 5.0 m² per cow). In addition, there are two sets of relationships, one applied for both first and second simulation layers and the other applied for third and fourth layers. For each layer, the computed flux is multiplied by a factor to account for effects of moisture on respiration ([DAYCENT, 2007](#)).

Manure Storage Emissions

Manure is stored as a liquid or in stacks. Nitrous oxide emission from slurry or liquid manure is predicted as a function of the exposed surface area of the manure storage and the presence of a crust on the surface. For an open slurry storage tank with a crust, an average emission rate of 0.8 g N_2O /m²-day determined by [Olesen et al. \(2006\)](#) is used to predict N_2O emissions:

$$E_{N_2O,manure} = E_{F,N_2O,man} \cdot A_{storage} / 1000 \quad [6.41]$$

where $E_{N_2O,manure}$ = emission of N_2O from slurry storage, kg N_2O /day
 $E_{F,N_2O,man}$ = emission rate of N_2O , 0.8 g N_2O /m²-day
 $A_{storage}$ = exposed surface area of the manure storage, m²

This relatively simple model is justified given the lack of available information to support a more complex model and because the N_2O emission from this type of manure storage is typically a relatively small portion of the whole farm emission of GHGs ([Olesen et al., 2006](#)).

The emission factor of 0.8 g N_2O /m²-day is applicable to bottom-loaded, uncovered slurry storage tanks where a natural crust forms on the manure surface. When a crust does not form, no N_2O is formed and emitted ([Külling et al., 2003](#); [Sneath et al., 2006](#)). This occurs if the manure DM content is less than 8%, manure is loaded daily onto the top surface of the storage, or an enclosed tank is used. Therefore, when any of these manure handling options are selected, the emission rate is zero.

For stacked manure with a greater DM content, N_2O emission is modeled as described in the [manure composting section](#). For both static piles and turned windrows, a dynamic process model tracks N transformation and emission through multiple layers on a daily time-step ([Bonifacio et al. 2017a, 2017b](#)). Daily emissions are summed over the storage period to obtain annual emissions.

Volatile Organic Compound Emissions

Emissions of volatile organic compounds (VOCs) from farms can contribute to the formation of ground-level ozone and other components of photochemical smog. Silage has been identified as a significant source of VOC emissions from farms, but manure also contributes. Development of emission inventories requires estimates of VOC emissions, but on-farm measurement is difficult and expensive. Simulation of emission processes provides an alternative method for estimating VOC emissions. Integration of VOC emission processes in DairyGEM provides a tool for estimating whole farm emissions and evaluating the effects of alternative management strategies for mitigating those emissions.

The contribution of a particular VOC to ozone formation is determined by the emission rate of the compound and its reactivity in the atmosphere. Following physical and chemical principles, emission rates are controlled by the concentration of VOCs in silage or manure and their volatility (Henry's law constant). A compound's volatility will control emission rate when the concentration is not limiting. When the concentration is limiting, i.e., when cumulative emission approaches the total quantity of a compound present, volatility is less important. These relationships are described in more detail in Hafner et al. (2012) and Hafner et al. (2013).

A process model was developed to predict emissions, but to this point the limited measured data available has not permitted a complete evaluation of the model. This portion of DairyGEM should be considered as preliminary. The effects of management changes on the relative changes in emission levels should be representative of those experienced on real farms. The absolute values predicted should be considered as only a representative level of emissions until further model evaluation can be done with comparisons to measured farm emission data.

Silage Sources

Although many different organic compounds are emitted from silage, alcohols (which can be formed by both bacteria and yeasts) appear to be the most important (Howard et al., 2010; Hafner et al., 2013). To represent total VOC emission, we consider four groups of VOCs which have the most potential to contribute to poor air quality: acids, alcohols, esters, and aldehydes (Hafner et al., 2013). VOC emission from silage is determined by the production of VOCs in the silage and the amount of each compound that is volatilized. VOC production can vary greatly among silages, and the sources of this variability are not yet known (Hafner et al., 2013). Therefore, in our model, VOC production is set based on typical values for different types of silage. From these fixed initial concentrations, we simulate VOC emissions.

For each VOC group, a given concentration in silage after fermentation is assigned. Emission losses are predicted and the remaining VOC mass is tracked as silage moves through three stages: storage removal (when silage is exposed following daily or more frequent feed removal), feed mixing, and feeding. VOC emission during storage removal and mixing reduces the concentration of VOCs present in the remaining stages. From the storage face and during feeding, cumulative VOC emission is determined over a defined exposure period using a numerical solution to the convection-diffusion model described by Hafner et al. (2012). Description of the numerical solution is provided in Bonifacio et al. (2017a). VOC emission from the mixing stage is simply based on the assumption that all VOC in the gaseous phase of silage is lost during mixing (Bonifacio et al., 2017a).

Emission processes

Simulation of VOC emissions from silage storages and feed lanes is based on the convection-diffusion model by [Hafner et al. \(2012\)](#). In this model, silage emissions take place from exposed surfaces through convection, but VOC molecules from deeper layers are lost as well once transported to the surface through dispersion or diffusion ([Hafner et al., 2010](#); [Hafner et al., 2012](#)). To simplify simulation of VOC emissions, assumptions include no VOC production/destruction after fermentation (i.e., once storage is opened), no VOC sorption to particles, and equilibrium partitioning between gas and aqueous phases ([Hafner et al., 2012](#)).

The governing equations defining the convection-diffusion model can be solved analytically ([Hafner et al., 2012](#)) and numerically ([Bonifacio et al., 2017a](#)). However, analytical and numerical solutions are both computationally intensive in nature. Thus, the simulation model described below is basically a numerical solution implemented using a very coarse computational domain (2 to 3 simulation layers only) and time step (1 hour) instead of using a fine resolution (e.g., 1-mm grid size, 1-sec time step) typical of numerical solutions.

For storages and feed lanes, the overall modeling approach for VOC emissions is illustrated in [Figure 7.1](#). Simulation inputs include silage source type (storage or feed lanes) and meteorological parameters (temperature and wind speed). Silage source type is used in setting bulk density, moisture content, and exposed surface area. Initial VOC concentrations for storages are fixed regardless of storage type while those for feed lanes depend on the remaining silage VOC mass after simulating losses during silage removal and feed mixing. The mass of VOC is transferred from a simulation layer to the adjacent outward layer by diffusion. Through convection, the mass of VOC is emitted from the surface (i.e., first simulation layer) of the silage source. VOC emission from the surface and transport within silage is performed on an hourly time step.

Following [Hafner et al. \(2012\)](#), the hourly flux of VOC emitted from the surface of the silage source is given by:

$$j_{sur} = 3600 \alpha C_{b,sur} \quad [7.1]$$

where j_{sur} = hourly VOC emission flux, g/m²-hr

α = effective surface mass transfer coefficient, m/s

$C_{b,sur}$ = bulk concentration at the silage surface (first simulation layer), g/m³.

It is assumed that VOC concentration in the ambient air is negligible. Hourly flux of VOC transferred from one layer to the adjacent upper layer is calculated as:

$$j = -3600 D (C_{b,l+1} - C_{b,l}) / \Delta x \quad [7.2]$$

where j = hourly VOC transport flux, g/m²-hr

D = effective diffusion coefficient, m²/s

$C_{b,l+1}$, $C_{b,l}$ = bulk concentrations for layers $l+1$ and l , respectively, g/m³

Δx = depth from the midpoint to the top edge of layer l , m.

Effective transport parameters are related to gas-phase values ([Hafner et al., 2012](#)):

$$D = E_{sg} / (H\rho_w w + \Phi) \quad [7.3]$$

$$\alpha = K_g / (H\rho_w w + \Phi) \quad [7.4]$$

where E_{sg} = diffusion-dispersion coefficient for VOCs through silage gas pores, m²/s

K_g = surface mass transfer coefficient, m/s

c_b = bulk volumetric concentration of a VOC group, g/m³

ρ_w = wet silage density, kg/m³

w = gravimetric water content of silage, kg/kg

Φ = gas-phase porosity, m³/m³.

VOCs in aqueous and gas phases are assumed to be in equilibrium at all times and locations ([Hafner et al., 2012](#)) and VOC partitioning between these two phases is based on Henry's Law:

$$K_H = m / P \quad [7.5]$$

where K_H = Henry's constant, mol/kg-atm

m = molal concentration of VOC, mol/kg

P = partial pressure of VOC in equilibrium with m , atm.

Following [Warneck \(2006\)](#), K_H can also be written as:

$$K_H = 1 / (P_{sat} MW_{H2O}) \quad [7.6]$$

where P_{sat} = saturated vapor pressure of VOC, atm

MW_{H_2O} = molecular weight of water, 18 g/mol

Since mass transfer calculations are based on concentrations, it is useful to transform the Henry's law constant into one based on concentrations (i.e., aqueous mol/kg per gaseous mol/m³ = m³/kg):

$$H = m / c_g \quad [7.7]$$

$$H = K_H R T \quad [7.8]$$

where H = concentration-based Henry's law constant, m³/kg

c_g = gas-phase concentration

R = universal gas constant, 8.2057 × 10⁻⁵ m³ atm/K-mol.

The computational domains for silage storages and feed lanes are set-up through refinement using experimental data from [Montes et al. \(2010\)](#) and [Hafner et al. \(2010\)](#) ([Bonifacio et al., 2017](#)). For silage storages, only the first 1 m from the surface (silo face) is considered where this 1 m is simulated in 3 layers. Depths for these 3 layers are functions of friction velocity and dry bulk density:

$$d_1 = (9.21 \times 10^{-3} - r_{dry}(1.47 \times 10^{-5})) + 1053.6 U r_{dry}^{-1.668} \quad [7.9]$$

$$d_2 = 40.5 U r_{dry}^{-1.336} \quad [7.10]$$

$$d_3 = 1.0 - (d_1 + d_2) \quad [7.11]$$

where d_1 , d_2 , and d_3 = depths for first (surface), second, and third layers, respectively, m

U = friction velocity, m/s

r_{dry} = silage dry bulk density, kg/m³.

For feed lanes, the depth of the feed is set constant at 0.15 m, which is simulated as two layers. Depths for these layers are given by:

$$d_1 = \max(4.7 \times 10^{-3}, 1.23 \times 10^{-2} - r_{dry}(5.87 \times 10^{-5})) + U(1.469 - 0.263 \ln r_{dry}) \quad [7.12]$$

$$d_2 = 0.15 - d_1 \quad [7.13]$$

Derivation of these depth equations for storages and feed lanes is described in [Bonifacio et al. \(2017a\)](#). As these equations were derived using ethanol emission measurement data ([Hafner et al., 2010](#); [Montes et al., 2010](#)), calculated depths are adjusted when simulating other VOCs to account for the difference in volatility relative to ethanol.

For feed mixing, it is assumed that all gas-phase VOCs in the silage are lost during mixing. Effects of mixer operating parameters and presence of other feed ingredients on silage VOC emissions during mixing are neglected. The initial mass of VOCs in silage to be mixed with other total mixed ration (TMR) feed ingredients is the average concentration for the total depth removed from the face of the silage storage (i.e., after accounting for VOC losses from the silo face). With very short mixing time (i.e., several minutes only), simulation of VOC emissions from feed mixing is done on a per load basis, with the number of loads approximated from the total weight of TMR feed ingredients to be mixed and feed mixer capacity.

Equal to the total mass of gas-phase VOCs in the silage prior to mixing, total VOC loss due to feed mixing is given by ([Bonifacio et al., 2017a](#)):

$$j_{mix} = C_g V_g \quad [7.14]$$

where j_{mix} = mass of VOC loss, g

C_g = gas-phase VOC concentration, g/m³

V_g = silage gas-filled pores volume, m³.

C_g is approximated from bulk concentration following [Hafner et al. \(2012\)](#) and V_g is the product of feed mixer capacity and gas-phase porosity (Φ) of silage during storage (prior to being mixed with other feed ingredients). Calculation of Φ follows the procedure of [Hafner et al. \(2012\)](#).

Calculated emissions from the four groups of compounds are aggregated after normalizing emissions based on the ozone formation potential of each group. Normalized emission for a VOC group is calculated as:

$$M_{O_3} = r M_{VOC} \quad [7.15]$$

where M_{O_3} = potential ozone forming emission, kg O₃

r = Equal Benefit Incremental Reactivity, kg O₃ per kg VOC

M_{VOC} = mass of VOC emitted, kg VOC.

The Equal Benefit Incremental Reactivity (EBIR) is a measure of the ozone formation potential of VOCs that is more suitable for rural environments than that of the maximum incremental reactivity (MIR).

Emission parameters

Characteristics of each VOC group were assigned based upon available data. With the exception of acids, data on VOC concentrations within silage are limited. Mean VOC concentrations from a compilation of silage data ([Hafner et al. 2013](#)) are presented in [Table 7.1](#). Data for alcohols include ethanol, 1-propanol, methanol, and other alcohols for corn and grass silage, but only ethanol for other feeds. Aldehyde data include acetaldehydes and several others for corn, grass, and alfalfa. Several esters have been measured in corn and grass silage, but not in other types of silage. Aldehyde data include acetaldehydes and several others for corn, grass, and alfalfa. Several esters have been measured in corn and grass silage, but not in other types of silage. We estimated concentrations for groups for which data were not available based on measurements for other silages.

The Henry's law constant is based on a single representative compound for each group: acetic acid (CAS number 64-19-7) for acids, ethanol (CAS 64-17-5) for alcohols, ethyl acetate (CAS 14178-6) for esters, and acetaldehyde (ethanal; CAS 75-07-0) for aldehydes. In calculating the Henry's law constant (Eq. 7.6), P_{sat} for the representative compounds is computed using the Antoine equation:

$$P_{sat} = 10^{(A - B/(C + T)) / 760} \quad [7.16]$$

where A , B , and C = compound-specific parameters
 T = temperature, °C.

Values used for A , B , and C for the representative compounds are obtained from [DDBST \(2015\)](#) and [NIST \(2015\)](#) (summarized in Table S-2 of [Bonifacio et al., 2017](#)).

To determine K_g and E_{sg} , we use relationships derived using ethanol measurement data of [Montes et al. \(2010\)](#) and validated using data of [Hafner et al. \(2010\)](#). Both parameters are functions of U and are given by:

$$K_g = 0.0002 + 0.1625 U - 0.1257 U^2 \quad [7.17]$$

$$E_{sg} = (0.0256 + 7.82 U) \times 10^{-4} \quad [7.18]$$

Derivation of these equations is described in [Bonifacio et al. \(2017a\)](#). Similar to the computational domain, calculated K_g and E_{sg} are adjusted when simulating other VOCs to account for the difference in volatility relative to ethanol.

Equal Benefit Incremental Reactivity values used to aggregate emissions were assigned based upon the work of [Carter \(2009\)](#) ([Table 7.2](#)). The potential ozone formation from each VOC group (MO_3) is summed over all groups to give an estimate of the total potential ozone formation from the emitted VOCs.

Farm processes

VOC emissions are determined for each silage source on the farm each year at the completion of the storage period. As shown in [Figure 7.1](#), input parameters include silage source properties (bulk density, moisture content, exposed surface area, and initial concentrations), daily ambient temperature, and wind speed. These parameters are based on user-inputs or computed in other components of the model. Silage bulk density and moisture content are modeled from the type of silage storage facility used and the characteristics of the crop harvested. Exposed surface area for the silo face is computed from the size of the storage facility whereas for feed lanes, this is based on the number of feedings per day and the amount of TMR delivered per feeding. Initial concentrations at the start of simulation are set based on the type of feed stored ([Table 7.1](#)). Effective wind speed is a function of the type of structure where silage is stored or the type of barn where animals are fed for feed lanes.

Daily emissions are determined for each silage source through 365 days of weather for each simulated year. For each storage, emissions of each VOC group are predicted for each day in which silage is being removed, using the emission process relationships described above (Equations 7.1 to 7.13). Emissions are first determined for the silage face exposed to the ambient atmosphere. The portion of each VOC group emitted is removed from the silage and the mass is moved to the feed mixer. Emissions from the mixer are then predicted (Equation 7.14), losses of each VOC group are removed, and the remaining mass moves to the feed bunk. Emissions continue from the feed bunk until the feed is consumed. The temperature of the silage and surrounding air at each stage is the average daily ambient temperature.

Five different types of storage structures are considered: stave tower silo, sealed tower silo, bunker, silage bag, and bale silage. Sealed tower silos are assumed to be open during feed removal for only two hours per day, and the air speed across the face is assumed to be very low (0.01 m/s). The air speed is also set to this low value for bale silage where

removal from storage is essentially immediate. Because of complexities in estimating reduction in the wind speed profile due to the presence of structures, air speed for all other storages during silage removal is set to 70% of the ambient wind speed. Required in calculating transport coefficients and the computational domain, U is calculated from the effective air speed using Equation 11.10. Other information needed to calculate emissions from the silo face are silage bulk density, dry matter content (i.e., moisture content), and the exposed surface area. For tower silos, density is calculated as a function of silo height and for bunker silos, density is a function of the moisture content of the silage entering the silo ([Savoie and Jofriet, 2003](#)). For bagged silage and bale silage, wet densities are 550 and 450 kg/m³, respectively. Silage dry matter content is determined in the silage component of IFSM based upon the harvest moisture content and storage conditions (see Silo Storage section). The exposed surface area is calculated from the radius of tower silos and bagged silage or the width and settled depth of bunker silos.

For feed lanes, density of the TMR is set to 160 kg/m³ and dry matter content to 55% (i.e., 45% moisture content). Air speed setting and U calculation are based on the type of animal housing. For open lots, air speed is set at ambient wind speed and U is calculated using Equation 4.10. For mechanically ventilated barns, air speed is calculated from ambient temperature (Equation 4.19), with U also calculated using Equation 4.10. For naturally ventilated barns, effective air speed inside the barn is set to 20% of the ambient wind speed ([Stowell et al., 2001](#)) to represent the decrease in air speed due to the presence of the structure and animals. Calculation of U is based on the log wind profile:

$$U = kV / \ln(z/z_f) \quad [7.19]$$

where V = air speed at animal height, m/s
 k = von Karman's constant, 0.4
 z = animal height, m
 z_f = surface roughness of feed, m.

In the simulation, animal height is set at 1.2 m and surface roughness of feed is assumed to be 25% of the total feed depth (15 cm).

The exposed surface area for feed lanes is calculated from the amount of feed delivered per feeding, TMR density, and feed depth. But as the amount of feed in feed lanes is consumed by animals over time, the decrease in the exposed surface area is simulated. Dairy cows have access to feed 24 hours a day with feed delivered once per day. Based on the observations of [DeVries et al. \(2005\)](#) on animal feeding behavior, the exposed surface area for feed lanes over time is computed as:

$$A_{feed} = A_i [1.0 (0.10 + (2.1/\pi) \tan^{-1}(0.04 \pi (F t - 2.0)))] \quad [7.20]$$

where A_{feed} = exposed area, m²
 A_i = initial exposed area of the feed (at the start of feeding), m²
 F = number of feedings per day,
 t = nth hour after feed delivery.
 π = 3.14159

In the simulation, the minimum value of A_{feed} is set to 10% of A_i .

For feed mixing, the number of loadings per day is calculated from the total amount of TMR to be fed within the day and feed mixer capacity. In the model, the total amount of TMR to be fed is based on animal groups and numbers, nutrient requirements, and feed availability. Default capacities for small, medium, and large feed mixers are 7.0, 8.5, and 12.0 tonnes.

Output from the silage VOC model includes daily emissions of each of the four VOC groups (kg of VOC) and corresponding daily values of the potential ozone formed (kg ozone, based on EBIR). Daily values of the four VOC groups are summed to obtain a total daily value.

Manure Sources

Several VOCs have been measured in cattle manure, and these measured compounds fall within three groups: acids, alcohols, and aromatics ([Table 7.3](#)). It is not clear if other compounds are present at much lower concentrations or if other compounds simply have not been measured within manure. Emissions of other VOCs have been measured indicating their presence in some form.

In general, volatile fatty acids are the most concentrated VOCs in manure ([Figure 7.2](#)). However, their importance for ozone formation is reduced by ionization in solution (which effectively lowers volatility) and low reactivity. Ethanol has been measured at high concentrations in some cases, and is the only alcohol that has been measured in multiple studies. Measurements suggest that concentrations of most aromatic compounds are lower than concentrations of acids

and alcohols, although some compounds may be present at high concentrations.

Measurement of VOC concentrations in manure during incubations has shown that production and consumption of organic compounds significantly impact VOC concentrations. In incubations of beef manure at room temperature, [Varel et al. \(2010\)](#) found that alcohol concentrations doubled within a few days, and acetic acid concentrations more than doubled over two weeks. Alcohol concentrations began to decline after a week of incubation, and the total alcohol concentration (mostly ethanol) was less than half of the initial concentration after four weeks. Aromatic compounds showed less change over time.

These production processes complicate modeling efforts. The magnitude of changes in VOC concentrations during manure storage are probably dependent on numerous variables, including cattle feed, manure handling and storage, and weather. With only limited data on changes in VOC concentrations over time, it is not currently possible to develop a robust model for predicting these changes, so fixed initial concentrations are used. Since the goal of our model is to predict the impact of manure handling strategies on emissions, initial concentrations are not particularly important as long as reasonable levels are assumed.

Volatility, reactivity, and implications for emission and ozone formation

The principles of volatility and reactivity were incorporated into two indices for estimating the relative importance of VOCs with regard to emission rate and ozone formation. Concentration alone provides an indication of the total mass available for emission, and therefore can serve as an index of relative emission (mass units) when concentrations are limiting. The second index is the product of concentration and Henry's law constant, which indicates the emission rate potential (mass units) when concentration is not limiting.

For manure in the barn, where exposure time is short, the second index (which includes volatility) seems most relevant. For stored manure, where exposure time is long but the depth of manure is high, volatility is also likely controlling, since it is unlikely that emission loss will be high enough for concentrations to be limiting. For field-applied manure, where losses of moderately- to highly-volatile compounds may approach 100%, an index without volatility seems most relevant.

Volatility of the compounds found in manure varies widely ([Table 7.4](#)). Alcohols have the highest volatility of the compounds considered. Reactivity also varies widely. In general, aromatic compounds have higher MIR values than alcohols and acids. However, this pattern is not true for EBIR, for which some aromatic compounds have negative values.

Alcohols have the highest emission potential (product of concentration and Henry's law constant), although variability is high, reflecting the variability in concentrations ([Figure 7.3](#)). The acid (acetic acid) and aromatic (cresol) with the highest values have mean values about 10% of that of ethanol.

We considered MIR and EBIR to evaluate reactivity and ozone forming potential ([Table 7.4](#)). The relationship among the compounds differs substantially among the indices; no one compound dominated in all cases. Considering reactivity and concentration, acids are the most important compounds for index 1, but for index 2 (with volatility included) alcohols are most important. Ethanol is the most important alcohol for both indices. Aromatic compounds generally have low values, with some exceptions. For index 1, the aromatic acids approach the values of some acids. For index 2, values of cresol and skatole are within a factor of 10 of the value for ethanol, while the indices of all acids are low.

Assuming that concentration and volatility control emission rates, these results suggest that alcohols, and ethanol in particular, are the most important VOCs emitted from manure, in terms of both mass emitted and ozone formation potential. This conclusion is consistent with emission measurements. Results suggest that some compounds can be ignored, but, unfortunately, numerous compounds in each group have the potential to make a significant contribution to ozone formation.

Based upon concentration, volatility and reactivity, five groups of compounds are defined as important: two groups of acids, one group of alcohols, and two groups of aromatics. Including each individual compound may provide a more accurate model, but given the large uncertainty in concentrations of VOCs in manure, this accuracy would not be realized. Furthermore, a lumped parameter approach provides a more usable model. Bulk concentrations of compounds are fixed as constant, or set at an initial value and allowed to decline due to emission with a fixed time step. Initial VOC concentrations for fresh manure within the barn are set at different levels (typically lower) than for manure in storage, to reflect an accumulation of VOCs over time ([Table 7.4](#)).

Ethanol is used as the representative compound for alcohols. Two groups are used for acids to capture differences in volatility and reactivity: C2 and C3 acids (group 1), and C4 acids (group 2). Two groups are also used for aromatic

compounds: aromatic acids and others, since the acids are generally less volatile than the other aromatic compounds present in manure. Parameter values for these five groups are given in [Table 7.5](#).

Emission processes

Emission is modeled using a two-film model with an additional resistance term that incorporates any gradient below the liquid film as well as resistance due to a surface cover or crust:

$$j = K c \quad [7.15]$$

where j = VOC flux, g/m²-s

K = overall mass transfer coefficient in aqueous phase units, m/s

c = VOC concentration in manure, g/m³.

This relationship assumes that the VOC concentrations in the ambient air are negligible. The overall mass transfer coefficient is given by:

$$K = 1 / (1/ (H k_g) + 1/ k_l + R_m) \quad [7.16]$$

where k = individual mass transfer coefficients for the gas (g) and liquid (l) films, m/s

R_m = additional resistance term, s/m

For the alcohol and aromatic groups, c in Eq. 7.15 is the total aqueous volumetric concentration of each group. For the acid groups, ionization must be considered:



For a given group of acids, the fraction of the total concentration in the free form (α) is determined as:

$$\alpha = 1 - \gamma_{\text{RCOO}} K_a / (10^{\text{pH}} + K_a) \quad [7.18]$$

where K_a = dissociation constant, dimensionless

γ_{RCOO} = activity coefficient of the ionized species, dimensionless

pH = solution pH, taken as the activity of H⁺

We assume that γ_{RCOO} is 0.7.

The gas phase mass transfer coefficient is related to air velocity near the surface based on the correlation of [MacKay and Yuen \(1983\)](#), as is currently used for ammonia and hydrogen sulfide emission components:

$$k_g = 0.001 + 0.0462 U \cdot SC^{-0.67} \quad [7.19]$$

where U = friction velocity, m/s

Friction velocity is given by:

$$U = 0.02 V^{1.5} \quad [7.20]$$

Determination of the liquid-phase mass transfer coefficient is more difficult. Correlations have been developed for solutions, but the higher viscosity of manure is expected to increase the thickness of the liquid film. The liquid mass transfer coefficient (k_l , m/s) is determined as a function of temperature:

$$k_l = 1.417 \times 10^{-12} (T^4) \quad [7.21]$$

where T = temperature (K).

Farm processes

VOC emissions can occur from manure in the housing facility, during long term storage, following land application and from feces deposited on pasture. Each of these processes is simulated on an hourly or daily time step, and daily emissions from each VOC group are converted to potential ozone forming units using the EBIR. Daily emissions are summed to give an annual emission from each manure source.

Daily VOC emissions from the housing facility are predicted using a procedure similar to that used to predict ammonia emissions (see [Ammonia emission section](#)). Emissions are determined for each hour of the day using Eq. 7.15 to 7.20. Hourly ambient temperature throughout the day is set as a function of maximum and minimum daily temperatures using Eq. 4.17 and 4.18. Air and manure temperature within barns is determined as a function of the ambient temperature using Eq. 4.16. For outdoor facilities, the temperature is the ambient temperature. The air velocity is equal to the average daily wind speed for outdoor facilities and half the ambient wind speed for open structures. For enclosed barns, air velocity is a function of ventilation rate which is directly related to ambient temperature (Eq. 4.19).

Surface pH of the manure is set as determined in the ammonia emission routine. For most barn types, the surface pH is 0.7 units greater than the bulk manure pH.

VOC concentration in the manure decreases each hour following excretion, i.e. the initial concentration is reduced each hour by the amount volatilized. At the end of 24 h, the amount and concentration of each VOC group remaining moves into long term storage or they provide the amount applied through daily spreading of manure.

When long term manure storage is used, emissions of each VOC group are again predicted each hour using Eq. 7.15 to 7.20. Air velocity over the storage is set to the average wind speed of the day. Temperature throughout the day is predicted using Eq. 4.17 and 4.18. Bulk manure pH and surface pH are determined as a function of manure dry matter content using Eq. 4.32 and 4.33. The amount of each VOC group in the storage is tracked by adding that coming into the storage and subtracting that emitted. When the storage is emptied, these amounts are reset. Hourly emissions are totaled to give daily and annual emissions of each VOC group.

Covers are sometimes used on manure storages. To represent cover effects, an additional transfer resistance is included in Eq. 7.16. For lack of better information, resistance values are those used to represent the effect on ammonia emission from covered storages (see [Ammonia emission section](#)).

Emissions following field application are determined on a 2 h time step beginning the day of application and continuing until the manure is incorporated into the soil. With incorporation, all emissions are assumed to cease. Emissions are predicted using Eq. 7.15 to 7.20 and mean daily air temperature and wind velocity. Manure pH increases to 8.6 immediately following application due to the rapid release of CO₂ (See [Ammonia emission section](#)). As the manure dries in the field, the pH decreases at a rate of 0.3 units per time step until it reaches a neutral pH of 7.0. Emissions for each time step are totaled for each VOC group.

Field emissions are also affected by infiltration of the manure into the soil. Following the procedure used to predict ammonia emission, the infiltration rate is a function of the dry matter content of the manure (Eq. 4.34). When rain occurs, the dry matter content is reduced in proportion to the amount of rain, and this increases the infiltration rate (see [Ammonia emission section](#)). The VOCs contained in the portion of the manure that infiltrates into the soil are no longer available for volatilization.

Feces deposits are the only VOC source considered from pasture. This source is tracked on a daily time step for up to 15 days following excretion. Emissions are predicted for each VOC group using equations 7.15 to 7.20. Temperature and air velocity are set to the mean daily ambient temperature and wind speed. Surface pH of the manure pat is set at 0.5 units greater than the bulk pH or about 8.0. As the manure dries, an additional transfer resistance is assumed to increase by 2×10^5 s/m each day, which decreases the potential emission. As with the other sources, daily emissions from each VOC group are converted to potential ozone forming emissions and totaled for the year.

Environmental Footprints

Environmental footprints are defined as the effect on the environment expressed per unit of product produced. In DairyGEM, three environmental footprints are assessed: water use, energy use, and GHG emissions. Functions or factors are used to estimate values for important uses or sources of each in the production system. This includes the major uses of water and fossil energy and the GHG emissions that occur during the manufacture of resources used in the production system. These secondary or upstream uses or sources can include the manufacture or production of fuel, electricity, machinery, fertilizer, pesticides, seed, and plastic used on the operation. Other major upstream inputs include any feed or replacement animals purchased and imported to the production system.

Another issue in determining an environmental footprint is the proper allocation of the environmental issue between co-products produced on the cattle operation. Co-products can include extra feed or crops produced and sold. In DairyGEM, a mass allocation is used to separate unused feed from that used in cattle production. The total resource use or emission associated with all feed production is determined. The portion of this total included in the cattle footprint is determined by subtracting that used to produce feeds not fed. The water or energy used to produce the unused crop is the total used in feed production times the ratio of feed dry matter not used or exported from the production system over the total produced. Similarly, the GHG emission associated with the unused feed is the total times the portion of the total feed dry matter not used.

An important issue in determining an environmental footprint is the proper allocation of the environmental metric between the primary product and co-products produced on the farm. Farm co-products can include extra feed or crops produced and sold from the farm and animals sold for beef production or other uses. [Cederberg and Stadig \(2003\)](#) discuss four options for allocating between milk and co-products in a life cycle assessment: no allocation, economic allocation, physical or biological allocation, and system expansion. With no allocation, all emissions are attributed to the

primary product (milk on a dairy farm) with no allocation toward the feed or animals sold. For an economic allocation, whole farm emissions are allocated between the products based upon the annual income received from each. A number of criteria can be used as a basis for a physical or biological allocation. Suggested approaches are to allocate based upon the mass of each produced or the energy required to produce each. The final option of system expansion avoids allocation by expanding the system to include the alternative method of producing the co-product.

In DairyGEM, a mass-based allocation is used to allocate between crops sold and that used in dairy or beef production. The total resource use or emission associated with all crop production is determined, but only that actually used in dairy or beef production is included in their footprints. The portion included is determined by subtracting that used to produce any crops sold. The water or energy used to produce the crop sold is the total used in crop production times the ratio of crop dry matter sold or exported from the production system over the total produced. Similarly, the GHG emission associated with the crop sold is subtracted from the total of the production system.

The animal co-product from dairy farms includes extra calves, heifers and cull cows sold from the farm. As discussed above, resource use and emissions associated with heifers produced on the farm are included in the total for the production system. The portion of these heifers used as dairy replacements is determined from the replacement rate of the lactating cows and the heifer mortality rate. Any additional heifers raised but not used are exported from the production system. Extra calves and cull cows are also exported from dairy production systems for use in meat production or other products.

Following the recommendation of the International Dairy Federation ([IDF, 2022](#)), a bio-physical allocation procedure is used to allocate resource use or emissions between milk and animal products in dairy production systems. For heifers produced on the farm, the resource use and emissions associated with the exported heifers is removed from that associated with milk production. That associated with exported heifers is the footprint of heifer production (per unit weight) times the heifer live weight leaving the farm. For calves and cull cows sold, an allocation factor is calculated based upon the mass of each sold from the production system ([IDF, 2022](#)). The allocation factor (AF) is determined as:

$$AF = 3.1 (M_{milk}) / (3.1 (M_{milk}) + 27.5 (M_{calf}) + 15.0 (M_{cow})) \quad [8.1]$$

where M_{calf} is the annual calf live weight sold (kg), M_{cow} is the annual cow live weight sold (kg) and M_{milk} is the annual amount of milk sold (kg) from the production system. This factor varies among production systems, but generally attributes about 90% of the resource input or net farm emission to milk production with the remainder attributed to the production of the calves and cull cows used for meat production. This allocation factor provides the portion of the total water use, fossil energy use, or GHG emission included in milk production.

Water Use

Water use in agricultural production is an important environmental concern, particularly in drier regions of the country. With a growing demand for water, the amount available for agriculture can be restricted. Knowing the amount required to produce cattle and where it is used can be useful in assessing the long term sustainability of production systems. The water use footprint calculated by DairyGEM should be used only as a general estimate of water use. There is much variability among production systems as affected by climate and production practices, and these differences may not be fully accounted in this model. The predicted water footprint is most useful for evaluating the relative differences obtained through management changes.

In DairyGEM, blue water use is calculated. Blue water is defined as that which could be used for other purposes. The major water requirement is irrigation for the production of feed. Other uses include drinking water for the animals, dust control, and animal cooling. Blue water does not include precipitation falling on cropland. A footprint is determined by summing the estimates for each of these uses, removing that allocated to unused feed and cattle sold, and dividing by the milk (FPCM) weight produced.

When irrigation is used, large amounts of blue water are required to produce crops. In DairyGEM, the amount of water used is determined using the user defined average annual irrigation water applied to produce each feed crop. This application rate is divided by a national average yield to get a water use per unit of feed produced. By multiplying the amount of each feed consumed on the operation by this water use factor, a total is estimated.

Drinking water use by the herd is determined using relationships from [NRC \(2000\)](#) for estimating water requirement. For lactating cows:

$$WI = 37.0 + 1.2 ATMP + 0.00088 ATMP^2 \quad [8.2]$$

where WI = water intake, kg/cow/d

$ATMP$ = average monthly ambient temperature, °C

For nonlactating cows, the drinking water requirement is determined as:

$$WI = 39.0 - 0.034 BW - 0.013 ATMP + 0.026 ATMP^2 \quad [8.3]$$

where BW = animal body weight, kg

For all other cattle:

$$WI = 0.9 + 0.067 BW - 0.0034 ATMP + 0.017 ATMP^2 \quad [8.4]$$

Water intake is determined each month for each animal group making up the herd, and these are summed to obtain the annual water intake. To obtain blue water intake, WI is increased 5% to account for evaporation, and the water contained in consumed feed is subtracted. Water contained in feed is determined from the amount of feed consumed and the water content of that feed.

Another relatively small water use is that for animal cooling or dust control on open lots. The amount of water used is primarily a function of the daily temperature. This is modeled by assuming that cooling is used on any day when the maximum daily temperature exceeds 25 °C. On days when cooling is used, water use is set at 30 kg/animal.

Upstream water use in the production of farm inputs is considered only for purchased feed, seed and animals. Water used in the production of machinery, fertilizer, pesticides, and plastic is considered to be very small and unimportant. That used for producing feed not produced on the cattle operation is determined using the same procedure as that used for feed produced on the operation. For cattle imported to the operation, a water footprint of 30 kg/kg live body weight can be assigned. The remaining upstream water use is in producing seed. A water footprint of 2.0 kg/kg of seed production is assigned based upon the amount of water required to produce grain seed crops. This use is small and relatively unimportant, so a simple factor is adequate to include this source.

Energy Use

Another important consideration in the evaluation of the sustainability of production systems is fossil energy use. This is defined as the total fossil energy required to produce the milk. This includes all fuel and electricity directly used in the production system as well as the secondary energy used in the production of resources used on the farm.

A major use of energy on dairy operations is the fuel used to operate tractors and other equipment for feed production, feeding, and manure handling. Fuel consumed is estimated through the use of fuel use factors. These factors represent a typical or average amount of fuel used to produce and deliver a unit of feed to the herd or remove a unit of manure. Fuel use factors were determined with the use of the Integrated Farm System Model ([Rotz et al., 2015](#)). This farm model simulates feed production and use over many years of weather. By simulating various feed production systems, average amounts of fuel use per unit of feed produced and fed were determined for each of the major types of feed used in cattle production ([Table 8.1](#)). This same approach was used to determine a factor for manure handling of 0.6 liter/t of manure removed from the housing facility. By summing the products of the fuel use factors and the amount of each feed used or the amount of manure handled, an estimate of total fuel use is obtained. Fuel use is converted to energy units assuming 38.6 MJ per liter of fuel.

Electricity is primarily used for milking, ventilation, and lighting. To estimate electricity consumption, electric use factors were obtained from a survey by [Ludington and Johnson \(2003\)](#). Electricity required for milking activities using a pipeline, parlor or automatic milking system is estimated as 0.015, 0.04 and 0.06 kWh/kg of milk produced, respectively. This factor times the total annual milk production provides annual use. Electricity use in lighting is 60 kWh per cow for a drylot and 80 kWh per cow for all other facilities. That used in ventilation is 0, 50, and 120 kWh per cow for drylots, naturally ventilated barns, and mechanically ventilated barns, respectively. When drylot and free stalls are combined, the electrical use is the average of the two facility types. When grazing is used, electrical use for lighting and ventilation are set proportional to the time animals spend in the barn.

Energy is also required for heating water used in cleaning dairy facilities. This requirement is estimated based upon the amount of milk received. The energy required for water heating is 0.08 MJ/kg of milk produced, and this energy can be provided by either electricity or natural gas.

Other energy inputs are the secondary energy uses during the production of farm inputs. These resource inputs include fuel, electricity, machinery, fertilizer, pesticides, seed, and plastic. Energy use factors for the production of each of these resources are used to calculate that included. For fuel and electricity, the energy consumed in their production is set at 4.1 MJ per liter and 5.7 MJ per kWh, respectively. For fertilizers, energy use in production is 30, 55, 12 and 0.45 MJ per kg of nitrogen, phosphate, potash and calcium carbonate used, respectively. The secondary energy use for

pesticide production is 275 MJ per kg of active ingredient where pesticide use is determined by feed crop using the factors of [Table 8.1](#).

Fertilizer use is estimated based upon the nutrient removal of the crop. The N removed in the production of each feed is determined as the protein content times the feed DM divided by 6.25. Nitrogen use is then set at 140% of this value to allow for typical N losses in crop production. Phosphate and potash use are set at 110% of that removed in each feed. With these assumptions, a total requirement of each fertilizer is determined. This total is reduced to account for manure nutrients returned to the cropland producing the feed. The quantities of each of the three major manure nutrients are available from the manure production and handling components of the model (see [Manure and Nutrient](#) section). This approach represents efficient use of manure and fertilizer nutrients. For manure not returned to cropland producing feed, the model user can specify the portion of the manure exported from the production system. The carbon and other nutrients for this manure are removed and the balance is satisfied through chemical fertilizers and imported manure.

To determine the energy used in manufacturing equipment, the total mass of equipment used in the production system is used. Machinery use factors were derived for the production of each major type of feed using the Integrated Farm System Model ([Rotz et al., 2015](#)). With this farm model, various production systems were simulated over a wide range in farm sizes. From model output, the total mass of machinery needed to produce each feed was totaled and this total was increased to include repairs used over the life of each machine. This total mass of machinery was then divided by the total feed produced over the life of the machine to obtain the machine use factor associated with each feed (kg of machinery per t DM of feed). Machinery use factors for a small operation are listed in [Table 8.1](#). Using the same procedure, a machine use factor of 0.17 kg per tonne of manure was obtained for manure handling.

On larger farms, machines are generally used more efficiently providing some reduction in the machinery required per unit of feed produced. From further simulation data of the Integrated Farm System Model, an adjustment for farm size was determined as:

$$ADJ = 1.06 - 0.0006 COWNO \quad [8.5]$$

where *ADJ* = scaling factor for herd size, fraction
COWNO = number of cows in the herd

Therefore, as herd size increases, the machinery use factor is reduced by this scale adjustment. A lower limit on this scaling factor is set at 0.46, so that herd sizes over 1000 cattle provide no further improvement in machinery efficiency. Machinery-use factors are multiplied by the associated use of all feeds during each year. This total, multiplied by an energy use factor of 42.6 MJ per kg of machinery mass, gives an annual value for this secondary energy use, i.e. the embodied energy in the manufacture of agricultural machinery ([DOE, 2011](#)).

Two relatively minor sources of secondary energy use are seed and plastic production. Seed use is a function of the feed crop produced ([Table 8.1](#)) and an energy use factor of 85 MJ per kg of seed is assumed. Plastic is used to produce silage in bags, bales or to cover silos. The amount of plastic used is a function of silo type. For simplicity in DairyGEM, bunker or pile covering uses 0.3 kg of plastic per tonne of silage used. The energy to produce this plastic is set at 67 MJ per kg of plastic.

When growing heifers or cows are purchased or imported to the farm, the energy used to produce those animals must be included in the footprint of the production system. This energy use is determined by multiplying the body weight of the imported animals by an energy use factor of 58 MJ per kg. This factor was determined by executing the DairyGEM model for a variety of heifer raising systems and dividing the total energy use by the weight produced. This animal footprint can be set in the farm (.frm) file.

Carbon Emission

With the growing concern over global climate change and the potential impact of GHG emissions, a need has developed for expressing the total emission associated with a product or service. A term that has come to represent this quantification is the carbon footprint. A carbon footprint is defined in many ways dependent upon the product or service represented. In general though, the carbon footprint is the total GHG emission intensity, expressed in CO₂ equivalent units (CO₂e), associated with that product or service. The conversion to CO₂e is done using the global warming potential (GWP) of each greenhouse gas where GWP values used in DairyGEM are 27 and 273 for CH₄ and N₂O, respectively ([Forster et al., 2021](#)).

We define the carbon footprint of farm produce to be the net of all greenhouse gases assimilated and emitted in the production system divided by the total product produced. For dairy farms this is the fat and protein corrected milk produced. This net emission is determined through a cradle to farmgate life cycle assessment of the production system ([Figure 1.1](#)). Emissions of CH₄ and N₂O are converted to CO₂e units by multiplying by their GWP. All emission sources

of the three gases are summed and the net CO₂ assimilated in feed production is subtracted to give the net emission of the production system. Emissions include both primary and secondary sources. Primary emissions are those emitted from the farm or production system during the production process. Secondary emissions are those that occur during the manufacture or production of resources used in the production system (machinery, fuel, fertilizer, etc.). Secondary emissions such as those in the manufacture of equipment must be apportioned to average annual values. By totaling the net of all annual emissions from both primary and secondary sources and dividing by the annual production, a carbon footprint is determined in units of CO₂e per unit of milk produced.

Primary Sources

Primary sources of GHG emissions include the net emission of anthropogenic CO₂ plus all emissions of CH₄ and N₂O resulting from the production system. Daily emission values of each gas are summed to obtain annual values. Anthropogenic CO₂ includes that emitted through the combustion of fossil fuels and decomposition of urea fertilizer and lime. The CO₂ emission from fuel combustion in farm engines is proportional to the amount of fuel used in the production and feeding of feeds (see [Energy Use](#) section). The CO₂ released is 2.7 kg per liter of fuel consumed ([DOE, 2011](#)). That released from decomposition of urea fertilizer and lime are 0.12 and 0.20 kg CO₂ per kg applied, respectively.

Methane emissions in cattle production include those from enteric fermentation, housing facility manure, manure storage, and feces deposited in pasture. Daily emission from enteric fermentation is a function of the metabolizable energy intake and the nutrient contents of the diet of each animal group making up the herd ([Equations 6.5 - 6.7](#)). Daily emissions from the housing facility and storage are a function of the amount of manure handled and the volatile solids content and temperature of the manure ([Equation 6.9 - 6.18](#)). Emissions following field application of manure are related to the volatile fatty acid content of the manure and the land area covered ([Equation 6.19](#)). Emissions during grazing are small and proportional to the amount of feces deposited on the pasture ([Grazing Animal section](#)).

Nitrous oxide emissions considered in the carbon footprint are that emitted from crop and pasture lands during the production of feeds with minor emissions from the manure storage and barn floor. An emission factor approach is used to estimate annual emissions in feed production (see [Crop production under Nitrous Oxide](#)). Emissions from the crust on a slurry storage and from a bedded pack barn floor are predicted as functions of the exposed surface area of each ([Equation 6.23](#)).

Secondary Sources

Secondary sources included in DairyGEM are the production of fuel, electricity, machinery, fertilizer, pesticide, and plastic used in the production of feeds, maintenance of animals, and handling of manure. Also included are the emissions during the production of any cattle not raised on the operation. Secondary emissions are all expressed in annual values of CO₂e units. Most of these emissions are in the form of CO₂, but where appropriate, CH₄ and N₂O emissions are converted to CO₂e units and included in emission factors.

Emissions during the production of fuel and electricity are 0.55 kg CO₂e/litre of fuel and 0.42 kg CO₂e/kWh of electricity used in the production system. As described above, fuel use is estimated as the product of a fuel-use factor for each feed times the amount of feed used summed over all feeds fed in the production system. Electricity use is the total of that used for lighting, ventilation and the production and feeding of feeds (see [Energy Use](#) section).

Secondary emissions associated with machinery include both the initial manufacture and the repairs required to maintain the equipment. These emissions are primarily due to the energy used to extract and process steel which accounts for the majority of the mass of agricultural machines ([Bowers, 1992](#); [Doering, 1980](#); [Fluck, 1992](#)). Based on this premise, an average GHG emission factor for the production of machinery is set at 3.54 kg CO₂e per kg of machinery mass. This emission factor was established based upon available sources of information on embodied energy or emissions in the manufacture of agricultural machinery ([DOE, 2011](#); [Wu et al., 2006](#); [Farrell et al., 2006](#); [Schroll, 1994](#); [Lee et al., 2000](#); [Graboski, 2002](#)). Machinery mass required is determined as defined in the [Energy Use section](#).

Emissions in the manufacture of nitrogen, phosphate, and potash fertilizers are 3.9, 1.7, and 0.56 CO₂e / kg of each used in the production of feeds. Fertilizer use is estimated as a function of the nutrients removed in harvested feed (see [Energy Use](#) section). Emission during the production of lime is determined using an emission factor of 0.014 kg CO₂e / kg of calcium carbonate equivalent used ([DOE, 2011](#)) where lime use is determined as described in the [Carbon Dioxide](#) section.

Emissions in the manufacture of pesticides are generally small, but an estimate is included. Pesticide use is determined using a factor set for each feed produced ([Table 8.1](#)). The total pesticide use is this factor times the amount of each feed used summed over all feeds. An average emission factor of 22 CO₂e /kg of pesticide is used to determine emissions during manufacture. This emission factor was set based upon the GREET model ([DOE, 2011](#)) and other sources ([Bath et al., 1994](#); [Dalgaard et al., 2001](#); [Patzek, 2004](#); [West and Marland, 2002](#); [Fluck, 1992](#); [Pimentel, 1980](#)).

Emissions in the production of seed are modeled similar to that of pesticides. Again this emission is small. Seed use factors were derived from typical seeding rates and yields of each crop ([Table 8.1](#)). Seed use is summed over all feeds fed based upon these typical seeding rates. An emission is determined using an emission factor of 0.5 CO₂e /kg of seed. This factor was estimated considering all the emissions in producing the seed crop minus the carbon contained in the seed ([Graboski, 2002](#); [Patzek, 2004](#); [Nagy, 1999](#); [West and Marland, 2002](#); [Schmer et al., 2008](#); [Borjesson, 1996](#)). This value is likely to vary among feed crops, but due to the lack of available information and the relative unimportance of this emission source, this average rate is used.

Plastic is often used in silage production for bags, to cover silos, or to wrap bales. Plastic use factors for tower silos, bunker silos, silage bags, and bale silage are 0.0, 0.3, 1.8, and 3.6 kg / t DM of stored feed for each storage type, respectively ([Savoie and Jofriet, 2003](#)). The emission factor for plastic production is set at 2.0 kg CO₂e /kg of plastic use ([IPCC, 2006](#); [Garrain et al., 2007](#); [AMPE, 2008](#); [Patel, 1999](#)). This emission source is normally very small and relatively unimportant compared to other secondary emission sources.

When cattle are purchased and brought onto the operation, the emissions associated with their production must be considered as part of the production system. These emissions will vary with the production practices used. To determine an average emission factor for heifer production, the model was used to determine the emissions for producing heifers over a wide range in farm size and feeding strategies including grazing. The range found for this secondary source was 8 to 14 kg CO₂e /kg of body weight produced with the lower values associated with larger farms or grazing production systems. An average emission factor of 11 kg CO₂e / kg of body weight is used as a default to represent this source, but this value can be changed in the .frm parameter file. This secondary emission is determined by multiplying the factor by the net body weight of livestock purchased. If all cattle are raised on the operation, this source is eliminated.

Indirect Sources

The major indirect source associated with dairy cattle is ammonia emission. As discussed in the [Ammonia Emissions](#) section, ammonia can volatilize from manure in the housing facility, from long-term storage, following field application, and from urine deposits on pasture. That ammonia can be transported to other ecosystems where a portion can transform to N₂O. Following IPCC (2006) guidelines, indirect N₂O emission is set at 1.6% of the NH₃-N emitted and 1.2% of nitrate lost by runoff and leaching.

References

- Alberta Agriculture, Food and Rural Development (AAFRD). 2005. Manure Composting Manual. Edmonton, Alberta, Canada: AAFRD, Technical Services Division, Livestock Engineering Unit & Environmental Practices Unit. Retrieved from [http://www1.agric.gov.ab.ca/\\$department/deptdocs.nsf/all/agdex8875\\$file/400_27-1.pdf?OpenElement](http://www1.agric.gov.ab.ca/$department/deptdocs.nsf/all/agdex8875$file/400_27-1.pdf?OpenElement)
- Archibeque, S.L., D.N. Miller, H.C. Freetly, and C.L. Ferrell. 2006. Feeding high-moisture corn instead of dry-rolled corn reduces odorous compound production in manure of finishing beef cattle without decreasing performance. *J. Anim. Sci.* 84 (7):1767.
- Arogo, J., R.H. Zhang, G.L. Riskowski, and D.L. Day. 1999. Mass transfer coefficient for hydrogen sulfide emission from aqueous solutions and liquid swine manure. *Trans. ASAE* 42(5): 1455-1462.
- ASAE Standards, 51st Ed. 2004. D384.1, Manure production and characteristics. St. Joseph, Mich.: ASAE.
- ASABE Standards, 57th Ed. 2010. D384.2, Manure production and characteristics. St. Joseph, Mich.: ASABE.
- Association of Polymer Manufacturers in Europe (AMPE). 2008. Eco-profiles of the European Plastics Industry. Available at: <http://lca.plasticseurope.org/main2.htm>, Accessed March 2008.
- Ayadi, F.Y., E.L. Cortus, and M.J. Spiehs. 2015a. Modeling water movement in beef cattle bedded manure packs. Waste to Worth: Spreading Science and Solutions. Seattle, WA. March 31-April 3, 2015. <http://www.extension.org/pages/72730/modeling-water-movement-in-beef-cattle-bedded-manure-pack#.VdsQcPIVhBc>
- Ayadi, F.Y., E.L. Cortus, M.J. Spiehs, D.N. Miller, and G.D. Djira. 2015b. Ammonia and greenhouse gas concentrations at surfaces of simulated beef cattle bedded manure packs. *Trans. ASABE* 58(3): 783-795.
- Ayadi, F.Y., M.J. Spiehs, E.L. Cortus, D.N. Miller, and G.D. Djira. 2015c. Physical, chemical, and biological properties of simulated beef cattle bedded manure packs. *Trans. ASABE* 58(3):797-811.
- Barberg, A.E., M.I. Endres, and K.A. Janni. 2007. Compost barns in Minnesota: a descriptive study. *Appl. Eng. Agric.* 23(2):231-238.
- Bath M., B. English, A. Turhollow, and H. Nyangito. 1994. Energy in synthetic fertilizers and pesticides: revisited. Oak Ridge National Laboratory. ORNL/sub/90-99732/2. Available at:

<http://www.osti.gov/energycitations/servlets/purl/10120269-p6yhLc/webviewable/10120269.PDF>.

- Benchaar, C., J. Rivest, C. Pomar, and J. Chiquette. 1998. Prediction of methane production from dairy cows using existing mechanistic models and regression equations. *J. Anim. Sci.* 76:617-627.
- Bernard, R., O.H. Ahmed, N.M.A. Majid, and M.B. Jalloh. 2009. Reduction of ammonia loss from urea through mixing with humic acids isolated from peat soil (Saprists). *American J. Environ. Sci.* 5(3):393-397.
- Bickert, W.G., B. Holmes, K. Janni, D. Kammel, R. Stowell, and J. Zulovich. 2000. Dairy Freestall Housing and Equipment MWPS-7. 7th ed. Midwest Plan Service. Iowa State University, Ames, IA.
- Bird, P. R. 1972. Sulphur metabolism and excretion studies in ruminants. X. Sulphide toxicity in sheep. *Aust. J. Biol. Sci.* 25:1087-1098.
- Black, R.A., J.L. Taraba, G.B. Day, F.A. Damasceno, and J.M. Bewley. 2013. Compost bedded pack dairy barn management, performance, and producer satisfaction. *J. Dairy Sci.* 96:8060-8074.
- Blanes-Vidal, V, S.G. Sommer, and E.S. Nadimi. 2009. Modelling surface pH and emissions of hydrogen sulphide, ammonia, acetic acid and carbon dioxide from a pig waste lagoon. *Biosys. Eng.* 104(4): 510-521.
- Blunden, J. 2006. Measurement, analysis, and modeling of hydrogen sulfide emissions from a swine facility in North Carolina. Dissertation in Marine, Earth and mineral sciences, North Carolina State University, Raleigh, NC.
- Blunden, J., V. Aneja, and J. Overton. 2008. Modeling hydrogen sulfide emissions across the gas- liquid interface of an anaerobic swine waste treatment storage system. *Atmos. Environment* 42(22): 5602-5611.
- Bonifacio, H.F., R.G. Maghirang, E.B. Razote, B.W. Auvermann, J.P. Harner III., J.P. Murphy, L. Guo, J.M. Sweeten, and W.L. Hargrove. 2011. Particulate control efficiency of a water sprinkler system at a beef cattle feedlot in Kansas. *Trans. ASABE* 54(1): 295-304. <http://dx.doi.org/10.13031/2013.36257>
- Bonifacio, H.F., C.A. Rotz, F. Montes, S.D. Hafner, M. Cohen, and F.M. Mitloehner. 2017a. A process-based model for volatile organic compounds from silage sources on farms. *Atmospheric Environment* 152:85-97.
- Bonifacio, H.F., C.A. Rotz, and T.L. Richard. 2017b. A process-based model for cattle manure compost windrows: Part 1 – model description. *Trans. ASABE* 60(3):877-892.
- Bonifacio, H.F., C.A. Rotz, and T.L. Richard. 2017c. A process-based model for cattle manure compost windrows: Part 2 – model performance and application. *Trans. ASABE* 60(3):893-913.
- Bonifacio, H.F., C.A. Rotz, A.B. Leytem, H.M. Waldrip, and R.W. Todd. 2015. Process-based modeling of ammonia and nitrous oxide emissions from open-lot beef and dairy facilities. *Trans. ASABE* 58(3):827-846.
- Borjesson, P. 1996. Energy analysis of biomass production and transportation. *Biomass and Bioenergy* 11(4):305-318.
- Bowers, W. 1992. Agricultural field equipment. p. 117-129. In Fluck, R. (ed). *Energy in Farm Production*. Elsevier Amsterdam.
- Bristow, A.W., D.C. Whitehead, and J.E. Cockburn. 1992. Nitrogenous constituents in the urine of cattle, sheep and goats. *J. Sci. Food Agric.* 59:387-394.
- Bruce, J.P., M. Frome, E. Haites, H. Janzen, R. Lal, and K. Paustian. 1999. Carbon sequestration in soils. *J. Soil Water Conserv.* 54(1): 382 – 389.
- Carter, W.P. 2009. Development of the SAPRC-07 chemical mechanisms and updated ozone reactivity scales. Center for Environmental Research and Technology, College of Engineering, University of California.
- Cederberg, C. and M. Stadig. 2003. System expansion and allocation in life cycle assessment of milk and beef production. *Int. J. LCA* 8(6):350-356.
- Cekmecelioglu, D., P.H. Heinemann, A. Demirci, and R.E. Graves. 2005. Modeling of compost temperate and inactivation of *Salmonella* and *E. Coli* O157:H7 during windrow food waste composting. *Trans. ASAE* 48(2):849-858.
- Chadwick, D.R. and B.F. Pain. 1997. Methane fluxes following slurry applications to grassland soils: laboratory experiments. *Agr. Ecosyst. Environ.* 63:51 – 60.
- Changirath, S., T.R. Halbach, and R. Dorff. 2011. Media and media mix evaluation for dairy barn compost bedding systems. Final report. Department of Soil, Water and Climate, University of Minnesota, St. Paul, MN.
- Chaoui, H., F. Montes, C.A. Rotz, and T.L. Richard. 2009. Volatile ammonia fraction and flux from thin layers of buffered ammonium solution and dairy cattle manure. *Trans. ASABE* 52(5): 1695-1706.
- Chastain, J.P., M.B. Vanotti, and M.M. Wingfield. 2001. Effectiveness of liquid-solid separation for treatment of flushed dairy manure: a case study. *Appl. Eng. Agric.* 17(3):343-354.

- Chen, Y.R., and A.G. Hashimoto. 1980. Substrate utilization kinetic model for biological treatment processes. *Biotechnol. Bioeng.* 22: 2081 – 2095.
- Chianese, D.S., C.A. Rotz, and T.L. Richard. 2009a. Whole-Farm Greenhouse Gas Emissions: A Review with Application to a Pennsylvania Dairy Farm. *Applied Eng Agric.* 25:431-442.
- Chianese, D.S., C.A. Rotz, and T.L. Richard. 2009b. Simulation of nitrous oxide emissions from dairy farms to assess greenhouse gas reduction strategies. *Trans. ASABE* 52(4):1325-1335.
- Cooperband, L. 2002. The art and science of composting – A resource for farmers and compost producers. Madison, Wisc.: University of Wisconsin-Madison, Center for Integrated Agricultural Systems. Retrieved from <http://www.cias.wisc.edu/wp-content/uploads/2008/07/artofcompost.pdf>.
- Converse, J.C., R.E. Graves, and G.W. Evans. 1977. Anaerobic degradation of dairy manure under mesophilic and thermophilic temperatures. *Trans. ASAE* 20: 336–340.
- Cussler, E.L. 1997. Diffusion mass transfer in fluid systems, 2nd ed. Cambridge University Press. New York, NY.
- Dahlke, H.E., Z.M. Easton, M.T. Walter, and T.S. Steenhuis. 2012. Field test of the variable source area interpretation of the Curve Number Rainfall-Runoff equation. *J. Irrig. Drain Eng.* 138:235-244.
- Dalgaard T., N. Halberg and J. Porter. 2001. A model for fossil energy use in Danish agriculture used to compare organic and conventional farming. *Agric., Ecosys. Environ.* 87:51-65.
- Das, K., and H.M. Keener. 1997. Moisture effect on compaction and permeability in composts. *J. Environ. Eng.* 123:275-281.
- Davidson, E.A., M. Keller, H.E. Erickson, L.V. Verchot, and E. Veldkamp. 2000. Testing a conceptual model of soil emissions of nitrous and nitric oxide. *Bioscience* 50(8):667 – 680.
- DAYCENT. 2007. DAYCENT. Ver. 4.5. Fort Collins, CO: Natural Resource Ecology Laboratory, Colorado State University.
- Del Grosso, S.J., W.J. Parton, A.R. Mosier, D.S. Ojima, A.E. Kulmala, and S. Phongpan. 2000. General model for N₂O and N₂ gas emissions from soils due to denitrification. *Global Biogeochem. Cy.* 14(4):1045 – 1060.
- Delgado-Rodrigues, O., H.J. Peinado-Guevara, C.R. Green-Ruiz, J. Herrera-Barrientos, and V. Shevnnin. 2011. Determination of hydraulic conductivity and fines content in soils near an unlined irrigation canal in Guasave, Sinaloa, Mexico, *Journal of Soil Science and Plant Nutrition* 11(3):13-31.
- Department of Energy (DOE). 2011. Greenhouse gases, regulated emissions and energy use in model transportation model, GREET version 2.7. Argonne National Laboratory, U.S. Dept. of Energy. Available at: <http://greet.es.anl.gov/> Accessed 28 February 2012.
- DeVries, T.J., M.A.G. von Keyserlingk, and K.A. Beauchemin. 2005. Frequency of feed delivery affects the behavior of lactating dairy cows. *J. Dairy Sci.* 88:3553 – 3562.
- Doering O. 1980. Accounting for energy in farm machinery and buildings. p. 9-21. In Pimentel, D. (ed) Handbook of Energy Utilization in Agriculture. CRC press Inc. Boca Raton, FL.
- Dortmund Data Bank Software & Separation Technology (DDBST). 2015. Saturated vapor pressure: Calculation by Antoine equation. <http://ddbonline.ddbst.com/AntoineCalculation/AntoineCalculationCGI.exe>
- Dewhurst, R.J., R.T. Evans, T.T. Mottram, P. Spanel, and D. Smith. 2001. Assessment of rumen processes by selected-ion-flow-tube mass spectrometric analysis of rumen gases. *J. Dairy Sci.* 84:1438-44.
- Elliott-Martin, R.J., T.T. Mottram, J.W. Gardner, P.J. Hobbs, and P.N. Bartlett. 1997. Preliminary investigation of breath sampling as a monitor of health in dairy cows. *J. Agric. Eng. Res.* 67:267–275.
- El-Mashad, H.M., R. Zhang, V. Arteaga, T. Rumsey, and F.M. Mitloehner. 2011. Volatile fatty acids and alcohols production during anaerobic storage of dairy manure. *Trans. ASABE* 54(2):599–607.
- Environmental Protection Agency (EPA), 1994. Air Emissions models for waste and wastewater. EPA Contract No. 68D10118. Office of Air Quality Planning and Standards, Research Triangle Park.
- Environmental Protection Administration (EPA). 1999. U.S. methane emissions 1990 – 2020: Inventories, projections, and opportunities for reductions. EPA 430-R-99-013. U.S. Environmental Protection Agency, Washington, D.C. Available at: <http://www.epa.gov/ghginfo>. Accessed 23 November 2007.
- Environmental Protection Administration (EPA). 2008a. Inventory of U. S. greenhouse gas emissions and sinks: 1990-2006. USEPA #430-R-08-005. Additional Information. U.S. Environmental Protection Agency. 1200 Pennsylvania Avenue, N. W. Washington, DC. Available at http://www.epa.gov/climatechange/emissions/downloads/08_Annex_6.pdf. Accessed 9 July 2008.

- Environmental Protection Administration (EPA). 2008b. Nitrous oxide: Sources and emissions. Washington, DC: U.S. Environmental Protection Agency. Available at: <http://www.epa.gov/nitrousoxide/sources.html>. Accessed 13 June 2008.
- Environmental Protection Agency (EPA). 2010. Cleaning up the nation's hazardous waste sites. Available at: <http://www.epa.gov/superfund/index.htm>. Accessed December 27, 2010.
- EPA. 2011. Air emissions monitoring study. Available at: <http://www.epa.gov/airquality/agmonitoring/data.html>. Accessed 18 May 2011.
- Energy Information Administration (EIA). 2006. Emissions of greenhouse gases in the United States 2005. DOE/EIA-0573 (2004). U.S. Department of Energy, Washington, D.C. Available at: <http://www.eia.doe.gov/oiaf/1605/ggrpt/>. Accessed 12 November 2007.
- Epstein, E. 1997. The Science of Composting. Boca Raton, Fla.: CRC Press LLC.
- Fales, S.L., L.D. Muller, S.A. Ford, M. O'Sullivan, R.J. Hoover, L.A. Holden, L.E. Lanyon, and D.R. Buckmaster. 1995. Stocking rate affects production and profitability in a rotationally grazed pasture system. *J. Prod. Agric.* 8(1):88-96.
- Farrell A., R. Plevin, B. Turner, A. Jones, M. O'Hare, and D. Kammen. 2006. Ethanol can contribute to energy and environmental goals. *Science* 311:506-508. (January 27). Online Supporting Material. Available at: <http://www.sciencemag.org/cgi/content/full/311/5760/506/DC1>. Accessed 9 July 2008.
- Finke, N. and B.B. Jorgensen. 2008. Response of fermentation and sulfate reduction to experimental temperature changes in temperate and arctic marine sediments. *Internat. Soc. Micro. Ecol.* 2:815-829.
- Fluck, R. 1992. Energy analysis for agricultural systems. p. 45-52. In Fluck, R. (ed). *Energy in Farm Production*. Elsevier Amsterdam.
- Forster, P., T. Storelvmo, K. Armour et al. 2021. The earth's energy budget, climate feedbacks, and climate sensitivity. In *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change* [Masson-Delmotte, V., P. Zhai, A. Pirani, S. L. Connors, et al. (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, pp. 923–1054. <https://doi.org/10.1017/9781009157896.009>
- Fox, D.G, L.O. Tedeschi, T.P. Tylutki, J.B. Russell, M.E. Van Amburgh, L.E. Chase, A.N. Pell, and T.R. Overton. 2004. The Cornell net carbohydrate and protein system model for evaluating herd nutrition and nutrient excretion. *Anim. Feed Sci. Technol.* 112:29-78.
- Fuller, E.N., P.D. Schettler, and J.C. Giddings. 1966. A new method for prediction of binary gas-phase diffusion coefficients. *Ind. Engng Chem.* 58(S):19-27.
- García-Ochoa, F., V.E. Santos, L. Naval, E. Guardiola, and B. López. 1999. Kinetic model for anaerobic digestion of livestock manure. *Enzyme Microb. Tech.* 25:55-60.
- Garrain D., P. Martinez, and R. Vidal. 2007. LCA of thermoplastics recycling. Proc. 3rd International Conference of Life Cycle Assessment. Zurich, August 27-29. Available at: <http://www.lcm2007.org/paper/168.pdf>. Accessed 9 July 2008.
- Ghazifard, A., R. Kasma-Kermanshashi, and Z.E. Far. 2001. Identification of thermophilic and mesophilic bacteria and fungi in Esfahan (Iran) municipal solid waste compost. *Waste Manage. Res.* 19:257-261.
- Gilhespy, S.L., J. Webb, D.R. Chadwick, T.H. Misselbrook, R. Kay, V. Camp, A.L. Retter, and A. Bason. 2009. Will additional straw bedding in buildings housing cattle and pigs reduce ammonia emissions? *Biosyst. Eng.* 102:180-189.
- Gooch, C.A., S.F. Inglis and P.E. Wright. 2007. Biogas distributed generation systems evaluation and technology transfer. NYSERDA project 6597 Interim Report. Available at: http://www.manuremanagement.cornell.edu/Pages/General_Docs/Reports/NYSERDA_Interim_Report_Final_2007.pdf. Accessed November 10, 2010.
- Gould, D.H., B.A. Cummings, and D.W. Hamar. 1997. In vivo indicators of pathological ruminal sulfide production in steers with diet-induced polioencephalomalacia. *J. Vet. Diagn. Invest.* 9:72–76.
- Graboski, M. 2002. Fossil energy use in the manufacture of corn ethanol. Colorado School of Mines. National Corn Growers Association. Available at: http://www.ncga.com/ethanol/pdfs/energy_balance_report_final_R1.PDF. Accessed 9 July 2008.
- Groenestein, C.M. and H.G. Van Faasen. 1996. Volatilization of ammonia, nitrous oxide, and nitric oxide in deep-litter systems for fattening pigs. *J. Agric. Eng. Res.* 65:269 – 274.
- Hamilton, S.W., E.J. DePeters, J.A. McGarvey, J. Lathrop, and F.M. Mitloehner. 2010. Greenhouse gas, animal

- performance, and bacterial population structure responses to dietary Monensin to dairy cows. *J. Environ. Qual.* 39:1-9.
- Hafner, S.D., C. Howard, R.E. Muck, R.B. Franco, F. Montes, P.G. Green, F. Mitloehner, S.L. Trabue, C.A. Rotz. 2013. Emission of volatile organic compounds from silage: compounds, sources, and implications. *Atmos. Environ.* 77:827-839.
- Hafner, S.D., F. Montes, C.A. Rotz, and F. Mitloehner. 2010. Ethanol emission from loose corn silage and exposed silage particles. *Atmos. Environ.* 44:4172:4180.
- Hafner, S.D., F. Montes, and C.A. Rotz. 2012. A mass transfer model for VOC emission from silage. *Atmos. Environ.* 54: 134-140.
- Hao, X., C. Chang, F.J. Larney, and G.R. Travis. 2001. Greenhouse gas emissions during cattle feedlot manure composting. *J. Environ. Qual.* 30:376-386.
- Haynes, R.J. and P.H. Williams. 1992. Changes in soil solution composition and pH in urine-affected areas of pasture. *J. Soil Sci.* 43: 323-334.
- Harrison, J. Animal Science Department, Washington State University. Puyallup Research and Extension Center, 7612 Pioneer Way, Puyallup, WA 98371.
- Haug, R.T. 1993. The Practical Handbook of Compost Engineering. CRC Press, Boca Raton, FL.
- Hill, D.T. 1982. A comprehensive dynamic model for animal waste methanogenesis. *Trans. ASAE* 28(3):850-855.
- Hill, D. 1984. Methane productivity of the major animal waste types. *Trans. ASAE* 27: 530-534.
- Hill, D.T. 1991. Steady-state mesophilic design equations for methane production from livestock wastes. *Trans. ASAE* 34(5):2157-2163.
- Holman, J.P. 1981. Heat Transfer. McGraw-Hill. New York, NY.
- Horwath, W.R., and L.F. Elliot. 1996. Microbial C and N dynamics during mesophilic and thermophilic incubations of ryegrass. *Biol. Fertil. Soils* 22:1-9.
- Howard, C., A. Kumar, I. Malkina, F. Mitloehner, P. Green, R. Flocchini, M. Kleeman. 2010. Reactive organic gas emissions from livestock feed contribute significantly to ozone production in central California. *Environ. Sci. Tech.* 44:2309-2314.
- Hutchings, N.J., S.G. Sommer, and S.C. Jarvis. 1996. A model of ammonia volatilization from a grazing livestock farm. *Atmos. Environ.* 30:589-599.
- Incropera, F.P. 2006. Fundamentals of Heat and Mass Transfer. 6th Edition. John Wiley & Sons.
- IPCC. 2007. Climate change 2007: The physical science basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change. Chapter 2, Changes in atmospheric constituents and in radiative forcing. Available at: <http://www.ipcc.ch/pdf/assessment-report/ar4/wg1/ar4-wg1-chapter2.pdf>. Accessed 28 November 2008.
- IPCC. 2001. Climate change 2001: The scientific basis. Contribution of Working Group I to the third assessment report of the Intergovernmental Panel on Climate Change. J.T. Houghton, Y. Ding, D.J. Griggs, M. Noguer, P.J. van der Linden, X. Dai, K. Maskell, and C.A. Johnson, eds. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.
- IPCC. 2006. Guidelines for national greenhouse inventories. Volume 3, p.3.75. Intergovernmental Panel on Climate Change Available at: http://www.ipcc-nggip.iges.or.jp/public/2006gl/pdf/3_Volume3/V3_3_Ch3_Chemical_Industry.pdf Accessed 9 July 2008.
- IPCC. 2006. Guidelines for national greenhouse inventories. Vol. 4: Agriculture, forestry and other land use. Intergovernmental Panel on Climate Change. Available at: <http://www.ipcc-nggip.iges.or.jp/public/2006gl/vol4.html>. Accessed 9 September 2011.
- IDF. 2022. The IDF global carbon footprint standard for the dairy sector. International Dairy Federation, Brussels, Belgium. Available at <https://shop.fil-idf.org/products/the-idf-global-carbon-footprint-standard-for-the-dairy-sector>. Accessed April 2026.
- Jacobson, M.Z. 1999. Fundamentals of Atmospheric Modeling. Cambridge University Press, Cambridge, UK, 656 pp.
- Jarvis, S.C., R.D. Lovell, and R. Panayides. 1995. Patterns of methane emission from excreta of grazing animals. *Soil Biol. Biochem.* 27(12):1581 – 1588.
- Jones, C. A. and J. R. Kiniry (Eds.). 1986. CERES-Maize: a simulation model of maize growth and development.

Texas A&M Univ. Press. College Station, Texas.

Jungbluth, T., E. Hartung, and G. Brose. 2001. Greenhouse gas emissions from animal houses and manure stores. *Nutr. Cycle Agroecosyst.* 60:133-145.

Kirchgeßner, M., W. Windisch, H.L. Müller, and M. Kreuzer. 1991. Release of methane and of carbon dioxide by dairy cattle. *Agribiol. Res.*, 44(2-3):91-102.

Kitzes, J., M. Wackernagel, J. Loh, A. Peller, S. Goldfinger, D. Cheng, and K. Tea. 2008. Shrink and share: humanity's present and future ecological footprint. *Phil. Trans. Biol. Sci.* 363:467-475.

Kling, G.W. 2010. Microbes: Transformers of Matter and Material. Ann Arbor, Mich.: Ecology and Evolutionary Biology, University of Michigan. Available at: globalchange.umich.edu/globalchange1. Accessed 12 December 2015.

Külling, D.R., H. Menzi, F. Sutter, P. Lischer, and M. Kreuzer. 2003. Ammonia, nitrous oxide and methane emissions from differently stored dairy manure derived from grass- and hay-based rations. *Nutr. Cycl. Agroecosyst.* 65: 13 – 22.

Lal, R. 2004. Soil carbon sequestration impacts on global climate change and food security. *Science* 5677:1623 – 1627.

Larney, F.J., and A.F. Olson. 2006. Windrow temperatures and chemical properties during active and passive aeration composting of beef cattle feedlot manure. *Can. J. Soil. Sci.* 86:783-797. <http://dx.doi.org/10.4141/S06-031>

Lee, J., H. Cho, J. Sung, S. Lee and M. Shin. 2000. Life cycle assessment of tractors (Korean Example). LCA Case Studies. *International J. Life Cycle Assessment* 5(4)205-208.

Lewis, W.K. and W.G. Whitman. 1924. Principles of gas absorption. *Indust. Engin. Chem.* 16(12):1215-1220.

Li, C., W. Salas, R. Zhang, C. Krauter, A. Rotz, and F. & Mitloehner. 2012. Manure-DNDC: A biogeochemical process model for quantifying greenhouse gas and ammonia emissions from livestock manure systems. *Nutr. Cycl. Agroecosyst.* 93:163-200.

Liang, Y., J.J. Leonard, J.J. Feddes, and W.B. McGill. 2004. A simulation model of ammonia volatilization in composting. *Trans. ASAE* 47(5):1667-1680.

Liao, W., C. Frear, and S. Chen. 2007. Biomass inventory technology and economics assessment, Report 1 – Characteristics of Biomass. Ecology Publication No. 07-07-025. Olympia, Wash.: Washington State Department of Ecology. Retrieved from <http://www.ecy.wa.gov/biblio/0707025.html>

Liss, P.S. and P.G. Slater. 1974. Flux of gases across the air-sea interface. *Nature* 247: 181-184.

Lorimor, J., W. Powers, and A. Sutton. 2000. Manure characteristics. Manure Management Systems Series MWPS-18. Midwest Plan Service. Iowa State University, Ames, IA.

Ludington, D. and E.L. Johnson. 2003. Dairy farm energy audit summary. FlexTech Services. New York State Energy Research and Development Authority. Albany, NY. <http://www.nyserda.org/publications/dairyfarmenergysummary.pdf> Accessed May 18, 2009.

Machine Applications Corporation (MAC). 2011. *The MAC Humidity/Moisture Handbook*. Sandusky, Ohio: MAC. Retrieved from <http://www.macinstruments.com>.

Mackay, D. and A.T.K. Yeun. 1983. Mass transfer coefficient correlations for volatilization of organic solutes from water. *Environ. Sci. Technol.* 17:211-217.

Masters, G. M. 2004. Renewable and efficient electric power systems, Hoboken, NJ: Wiley.

Mertens, D.R. 1997. Creating a system for meeting the fiber requirements of dairy cows. *J. Dairy Science.* 80:1463-1481.

Mertens, D.R. 1992. Nonstructural and structural carbohydrates. In *Large Dairy Herd Management* eds. H.H. Van Horn and C.J. Wilcox. Pp 219-234. Am. Dairy Sci. Assoc., Champaign, IL.

Mertens, D.R. 1987. Predicting intake and digestibility using mathematical models of rumen function. *J. Anim. Sci.* 64(5):1548-1558.

Meyer, D. 1997. Alternatives to manure management problems. p. 58-65. In Proc. Western Dairy Management Conf., Las Vegas, Nevada.

Mielke, L.N., N.P. Swanson, and T.M. McCalla. 1974. Soil profile conditions of cattle feedlots. *J. Environ. Qual.* 3:14-17.

Miller, D.N. and V.H. Varel. 2001. Invitro study of the biochemical origin and production limits of odorous compounds in cattle feedlots. *J. Anim. Sci.* 79 (12):2949-2956.

- Miller, D.N. and V.H. Varel. 2002. An in vitro study of manure composition on the biochemical origins, composition, and accumulation of odorous compounds in cattle feedlots. *J. Anim. Sci.* 80 (9):2214.
- Mills, J.A.N., E. Kebreab, C.M. Yates, L. A. Crompton, S. B. Cammell, M.S. Dhanoa, R.E. Agnew, and J. France. 2003. Alternative approaches to predicting methane emissions from dairy cows. *J. Anim. Sci.* 81(12):3141-3150.
- Misselbrook, T.H., and J.M. Powell. 2005. Influence of bedding material on ammonia emissions from cattle excreta. *J. Dairy Sci.* 88:4304-4312.
- Misselbrook, T.H., T.J. Van Der Weerden, B.F. Pain, S.C. Jarvis, B.J. Chambers, K.A. Smith, V.R. Phillips, and T.G.M. Demmers. 2000. Ammonia emission factors for UK agriculture. *Atmos. Environ.* 34: 871-880.
- Mobley, H L, and R P Hausinger. 1989. Microbial ureases: significance, regulation, and molecular characterization. *Microbiological Reviews* 53(1): 85-108.
- Moller, H., J. Hansen, and C. Sorensen. 2007. Nutrient recovery by solid-liquid separation and methane productivity of solids. *Trans. ASABE* 50:193-200.
- Monteny, G.J., C.M. Groenestein, and M.A. Hilhorst. 2001. Interactions and coupling between emissions of methane and nitrous oxide from animal husbandry. *Nutr. Cycl. Agroecosyst.* 60:123-132.
- Montes, F., S.D. Hafner, C.A. Rotz, and F.M. Mitloehner. 2010. Temperature and air velocity effects on ethanol emission from corn silage with the characteristics of an exposed silo face. *Atmos. Environ.* 44:1987 – 1995.
- Montes, F., C.A. Rotz, and H. Chaoui. 2009. Process modeling of ammonia volatilization from ammonium solution and manure surfaces. *Trans. ASABE* 52(5):1707-1719.
- Mottram, T.T., W.J.F. Ditcham, H. Bolam, L. Short, S. Cammell, D.E. Beever, and P.J. Hobbs. 2000. Dimethyl sulfide and methane in the breath of cows: methods of capture and quantification. Project report CR/1031/00/0225. Silsoe Research Institute, Bedfordshire, U.K.
- Muck, R.E. 1982. Urease activity in bovine feces. *J. Dairy Sci.* 65:2157-2163.
- Nagy, C. 1999. Energy coefficients for agriculture inputs in western Canada. Canadian Agricultural Energy End-Use Data Analysis Centre (CAEEDAC). Available at: <http://www.csale.usask.ca/PDFDocuments/energyCoefficientsAg.pdf>. Accessed 9 July 2008.
- National Institute of Standards and Technology (NIST). 2015. Acetaldehyde. <http://webbook.nist.gov/cgi/cbook.cgi?ID=C75070&Mask=4&Type=ANTOINE&Plot=on>. Accessed 19 November 2015.
- National Academies of Sciences, Engineering, and Medicine. 2021. Nutrient Requirements of Dairy Cattle: Eighth Revised Edition. Washington, DC: The National Academies Press.
- National Research Council. 1989. Nutrient requirements of dairy cattle. 6th rev. ed. Natl. Acad. Sci., Washington, DC.
- National Research Council. 2000. Nutrient Requirements of Beef Cattle – update 2000. National Academy Press.
- National Research Council. 2001. Nutrient requirements of dairy cattle. 7th rev. ed.: Natl. Acad. Sci., Washington, D.C.
- National Research Council. 2003. Air emissions from animal feeding operations: current knowledge, future needs. Natl. Acad. Sci., Washington, DC.
- Neitsch, S.L., J.G. Arnold, J.R. Kiniry, and J.R. Williams. 2005. Soil and water assessment tool: Theoretical documentation – version 2005. Temple, TX: USDA Agricultural Research Service, Grassland, Soil and Water Research Laboratory.
- Nennich, T.D., J.H. Harrison, L.M. VanWieringen, N.R. St-Pierre, R.L. Kincaid, M.A. Wattiaux, D.L. Davidson, and E. Block. 2006. Prediction and Evaluation of Urine and Urinary Nitrogen and Mineral Excretion from Dairy Cattle. *J. Dairy Sci.* 89:353-364.
- Ni, J. 1999. Mechanistic models of ammonia release from liquid manure: a review. *J. Agric. Eng. Res.* 72:1-17.
- Ni, J., A. Heber, A. Sutton, and D. Kelly. 2009. Mechanisms of gas releases from swine wastes. *Trans. ASABE* 52: 2013-2025.
- NRCS South Dakota. 2011. Beef and Dairy Bedded Pack Barn Planning and Design. Design Technical Note No. SD2011-1. USDA Natural Resources Conservation Services, South Dakota.
- Olesen, J.E., K. Schelde, A. Weiske, M.R. Weisbjerg, W.A.H. Asman, and J. Djurhuus. 2006. Modelling greenhouse gas emissions from European conventional and organic dairy farms. *Agric. Ecosyst. Environ.* 112:207 – 220.
- Ott, P., S. Hansen, and H. Vogtmann. 1983. Nitrates in relation to composting and use of farmyard manures. p. 145-

154. In Lockeretz, W. (ed) Environmentally Sound Agriculture. Praeger Scientific, New York, NY.
- Parton, W.J. 1984. Predicting soil temperatures in a shortgrass steppe. *Soil Sci.* 138:93-101.
- Parton, W.J., A.R. Mosier, D.S. Ojima, D.W. Valentine, D.S. Schimel, K. Weier, and A.E. Kulmala. 1996. Generalized model for N₂ and N₂O production from nitrification and denitrification. *Global Biogeochem. Cy.* 10(3):401 – 412.
- Parton, W.J., E.A. Holland, S.J. Del Grosso, M.D. Hartman, R.E. Martin, A.R. Mosier, D.S. Ojima, and D.S. Schimel. 2001. Generalized model for NO_x and N₂O emissions from soils. *J. Geophys. Res.* 106(D15):17403 – 17419.
- Patel, M. 1999. Closing carbon cycles; carbon use for materials in the context of resource efficiency and climate change. Thesis Utrech University. Faculty of Chemistry. Utrech, the Netherlands.
- Patzek, T. 2004. Thermodynamics of the corn-ethanol biofuel cycle. *Crit. Rev. Plant Sci.* 23(6):519-567.
- Paul, J.W. and E.G. Beauchamp. 1989. Relationship between volatile fatty acids, total ammonia, and pH in manure slurries. *Biol. Waste.* 29:313 – 318
- Penn State. 2011. Penn State Agronomy Guide. Cooperative Extension, The Pennsylvania State University. Available at: <http://extension.psu.edu/agronomy-guide>. Accessed 9 September 2011.
- Pennsylvania Agricultural Statistics Service (PASS). 2008. Pennsylvania Agricultural Statistics, prices received. <http://www.nass.usda.gov/QuickStats/index2.jsp> Accessed January 10, 2009.
- Pepple, L.M., D.S. Andersen, R.T. Burns, and L.B. Moody. 2011. Physical and chemical properties of runoff effluent from beef feedlots in Iowa. *Trans. ASABE* 54(3):1079-1084.
- Perry, R., D. Green and J. Maloney. 1997. Perry's Chemical Engineering Handbook. 7th Edition. McGraw-Hill.
- Pimentel, D. 1980. Energy inputs for the production, formulation, packaging and transport of various pesticides. Pages 45-48. In Pimentel, D. (ed) Handbook of Energy Utilization in Agriculture. CRC press Inc. Boca Raton, Florida.
- Potter, C.S., E.A. Davidson, and L.V. Verchot. 1996. Estimation of global biogeochemical controls and seasonality in soil methane consumption. *Chemosphere* 32:2219-2245.
- Pratt, P.F., and J.Z. Castellanos. 1981. Available nitrogen from animal manures. *California Agriculture*.
- Predicala, B., M. Nemati, S. Stade, and C. Language. 2008. Control of hydrogen sulfide emission from swine manure using Na-nitrite and Na-molybdate. *J. Hazard. Mater.* 154: 300-309.
- Razote, E.B., R.G. Maghirang, B.Z. Predicala, J.P. Murphy, B.W. Auvermann, J.P. Harner III, and W.L. Hargrove. 2006. Laboratory evaluation of the dust-emission potential of cattle feedlot surfaces. *Trans. ASABE* 49(4):1117-1124.
- Renard, J., S. Calidonna, and M. Henley. 2004. Fate of ammonia in the atmosphere: A review for applicability to hazardous releases. *J. Hazard. Mater.* 108(1-2): 29-60.
- Richard, T.L. 1997. The kinetics of solid-state aerobic biodegradation. PhD dissertation. Ithaca, N.Y.: Cornell University, Biological Engineering.
- Richard, T.L., H.V.M. Hamelers, A. Veeken, and T. Silva. 2002. Moisture relationships in composting processes. *Compost Sci. Util.* 4:286-302.
- Richard, T.L., A.H.M. Veeken, V. de Wilde, and H.V.M. Hamelers. 2004. Air-filled porosity and permeability relationship during solid-state fermentation. *Biotechnol. Prog.* 20:1372-1381.
- Richard, T.L., L.P. Walker, and J.M. Gossett. 2006. Effects of oxygen on aerobic solid-state biodegradation kinetics. *Biotechnol. Prog.* 22:60-69.
- Ritchie, J.T. 1972. Model for predicting evaporation from a row crop with incomplete cover. *Water Resour. Res.* 8:1204-1213.
- Robin, P., S. Hacala, and J.M. Paillat. 2002. Heat partition during composting process of cattle manure. In Proceedings of the 10th International Conference of the RAMIRAN Network. High Tatras, Slovak Republic: Recycling of Agricultural, Municipal and Industrial Residues in Agriculture Network (RAMIRAN).
- Robinson, R., E. Kimmel, and Y. Avnimelech. 2000. Energy and mass balances of windrow composting system. *Trans. ASAE* 43(5):1253-1259. <http://dx.doi.org/10.13031/2013.3019>
- Rotz, C.A. 2004. Management to reduce nitrogen losses in animal production. *J. Anim. Sci.* 82(E. Suppl.):E119-E137.
- Rotz, C.A., D.R. Buckmaster, D.R. Mertens, and J.R. Black. 1989. DAFOSYM: a dairy forage system model for evaluating alternatives in forage conservation. *J. Dairy Sci.* 72:3050-3063.
- Rotz, C.A., M.S. Corson, D. S. Chianese, F. Montes, S.D. Hafner, H.F. Bonifacio, and C.U. Coiner. 2015. *Integrated Farm System Model: Reference Manual, Version 4.2*. Pasture Systems and Watershed Management Research Unit,

USDA Agricultural Research Service: University Park, PA. Available at:
<https://www.ars.usda.gov/Main/docs.htm?docid=8519>.

Rotz, C.A., P.J. Kleinman, C.J. Dell, T.L. Veith, and D.B. Beegle. 2010. Environmental and economic comparisons of manure application methods in farming systems. *J. Environ. Quality* 40:438-448.

Rotz, C. A., D.R. Mertens, D.R. Buckmaster, M.S. Allen, and J.H. Harrison. 1999. A dairy herd model for use in whole farm simulations. *J. Dairy Sci.* 82:2826-2840.

Rotz, C. and J. Oenema. 2006. Predicting management effects on ammonia emissions from dairy and beef farms. *Trans. ASAE* 49(4):1139-1149.

Rynk, R., van de Kamp, M., Wilson, G.B., Singley, M.E., Richard, T.L., Kolega, J.J., Gouin, F.R., Laliberty Jr., L., Kay, D., Murphy, D.W., Hoitink, H.A., & Brinton, W.F. (1992). *On-Farm Composting Handbook*. Ithaca, N.Y.: Northeast Regional Agricultural Engineering Service.

Sahrawat, K.L. and D.R. Keeney. 1986. Nitrous oxide emissions from soils. *Adv. Soil Sci.* 4:103-148.

Savoie, P. and J.C. Jofriet. 2003. Silage storage. p. 405-467 In Buxton, D.R., R.E. Muck, and J.H. Harrison (eds). *Silage Science and Technology*. Agronomy Monograph 42, Madison, WI: American Society of Agronomy.

Saxton, K.E., and W.J. Rawls. 2006. Soil water characteristics estimates by texture and organic matter for hydrological solutions. *Soil Sci. Soc. Am. J.* 70:1569-1578.

Schroll, H. 1994. Energy flow and ecological sustainability in Danish agriculture. *Agric. Ecosys. Environ.* 51 (1994):301-310.

Schmer, M., K. Vogel, R. Mitchell, and R. Perrin. 2008. Net energy of cellulosic ethanol from switchgrass. *Proc. National Academy Sciences* 105(2):464-469.

Shaffer, M.J., A.D. Halvorson, and F.J. Pierce. 1991. Nitrate leaching and economic analysis packager (NLEAP): model description and application. In *Managing Nitrogen for Groundwater Quality and Farm Profitability*, eds. Follett, R.F., D.R. Deeney, and R.M. Cruse. pp. 285-298. Soil Science Society of America, Inc. Madison, WI.

Shane, E.M., M.I. Endres, and K.A. Janni. 2010. Alternative bedding materials for compost bedded pack barns in Minnesota: a descriptive study. *Appl. Eng. Agric.* 26(3): 465-473.

Sherlock, R.R., S.G. Sommer, R.Z. Khan, C.W. Wood, E.A. Guertal, J.R. Freney, C.O. Dawson, and K.C. Cameron. 2002. Emission of ammonia, methane and nitrous oxide from pig slurry applied to a pasture in New Zealand. *J. Environ. Qual.* 31:1491-1501.

Sneath, R.W., F. Beline, M.A. Hilhorst, and P. Peu. 2006. Monitoring GHG from manure stores on organic and conventional dairy farms. *Agr. Ecosyst. Environ.* 112:122-128.

Snoeyink, V. L., and D. Jenkins. 1980. *Water Chemistry*. New York, N.Y.: John Wiley & Sons.

Soil Survey Division Staff (SSDS). 1993. *Soil Survey Manual*. USDA Handbook 18. USDA Natural Resources Conservation Services, Washington, DC.

Sommer, S.G. 2001. Effect of composting on nutrient loss and nitrogen availability of cattle deep litter. *Europ. J. Agronomy* 14:123-133.

Sommer, S.G., J.E. Olesen, and B.T. Christensen. 1991. Effects of temperature, wind speed and air humidity on ammonia volatilization from surface applied cattle slurry. *J. Agric. Sci.* 117:91-100.

Sommer, S.G., S.O. Petersen, and H.B. Møller. 2004. Algorithms for calculating methane and nitrous oxide emissions from manure management. *Nutr. Cycl. Agroecosyst.* 69:143-154.

Sommer, S.G., R.R. Sherlock, and R.Z. Khan. 1996. Nitrous oxide and methane emissions from pig slurry amended soils. *Soil Biol. Biochem.* 28(10/11):1541-1544.

Sommer, S.G., G.Q. Zhang, A. Bannink, D. Chadwick, T. Misselbrook, R. Harison, N.J. Hutchings, H. Menzi, G.J. Monteny, J.Q. Ni, O. Oenema and J. Webb. 2006. Algorithms determining ammonia emission from buildings housing cattle and pigs and from manure stores. *Advances in Agron.* 89:261-335.

Spiehs, M.J., T.M. Brown-Brandl, E.D. Berry, J.E. Wells, D.B. Parker, D.N. Miller, J.P. Jaderborg, and A. DiCostanzo. 2014. Use of wood-based materials in beef bedded manure packs: 2. Effect of odorous volatile organic compounds, odor activity value, *Escherichia coli*, and nutrient concentrations. *J. Environ. Qual.* 43:1195-1206.

Spiehs, M.J. and V.H. Varel. 2009. Nutrient excretion and odorant production in manure from cattle fed corn wet distillers grains with solubles. *J. Anim. Sci.* 87(9):2977-2984.

Spiehs, M.J., B.L. Woodbury, B.E. Doran, R.A. Eigenberg, K.D. Kohl, V.H. Varel, E.D. Berry, and J.E. Wells. 2011.

- Environmental conditions in beef deep-bedded mono-slope facilities: a descriptive study. *Trans. ASABE* 54(2):663-673.
- Springer, C., P. D. Lunney, and K. T. Valsaraj. 1984. Emission of hazardous chemicals from surface and near surface impoundments to air. U.S. Environmental Protection Agency, Solid and Hazardous Waste Research Division. Cincinnati, OH. Project Number 808161-02. December 1984. p. 3-4 to 3-16.
- Staudinger, J. and P.V. Roberts. 2001. A critical compilation of Henry's law constant temperature dependence relations for organic compounds in dilute aqueous solutions. *Chemosphere* 44:561-576.
- Stein, V.B., and J.P.A. Hettiaratchi. 2001. Methane oxidation in three Alberta soils: Influence of soil parameters and methane flux rates. *Environ. Technol.* 22:101-111.
- Stewart, B.A. 1970. Volatilization and nitrification of nitrogen from urine under simulated cattle feedlot conditions. *Environ. Sci. Technol.* 4(7):579-582.
- Stombaugh, D.P., and S.E. Nokes. 1996. Development of a biologically based aerobic composting simulation model. *Trans. ASAE* 39(1):239-250.
- Stowell, R.R., C.A. Gooch, and S.F. Inglis. 2001. Environmental conditions within tunnel-ventilated and naturally ventilated dairy freestall facilities. In: 2001 ASAE Annual International Meeting. ASAE, St. Joseph, MI.
- Stumm, W., and J. Morgan. 1996. Aquatic Chemistry. 3rd ed. New York, N.Y.: John Wiley and Sons.
- Sutitarnontr, P., E. Hu, M. Tuller, and S.B. Jones. 2014. Physical and thermal characteristics of dairy cattle manure. *J. Environ. Qual.* 43:2115-2129.
- Tyrrell, H.F., P.W. Moe, and W.P. Flatt. 1970. Influence of excess protein intake on energy metabolism of the dairy cow. In *Energy Metabolism of Farm Animals*, eds. A. Schurch and C. Wenk. Page 69 Proc. 5th Symp. Energy Metab., Eur. Assoc. Anim. Prod. Publ. No. 13. Juris Druck and Verlag Zurich, Vitznau, Switzerland.
- USAF. 1991. A Method for Estimating Missing Hourly Temperatures using Daily Maximum and Minimum Temperatures. USAFETAC/PR-91/017. USAF Environmental Technical Applications Center. Scott Air Force Base, IL.
- USDA. 2005. Chapter 10, Montana Supplement, Runoff Curve Number Determination for Feedlots in Montana, 210-VI-NEH-651, Amend. MT37. In: National Engineering Handbook, Part 651. Agricultural Waste Management Field Handbook. USDA Natural Resources Conservation Services, Washington, DC.
- USDA. 2012. Chapter 2 Estimating Runoff. In: National Engineering Handbook, Part 650. Agricultural Waste Management Field Handbook. USDA Natural Resources Conservation Services, Washington, DC.
- USDOE. 2009. Determining the Porosity and Saturated Hydraulic Conductivity of Binary Mixtures. PNNL-18801. USDOE Office of Science, Washington, DC.
- Van Horn, H.H., G.L. Newton, R.A. Nordstedt, E.C. French, G. Kidder, D.A. Graetz, and C.F. Chambliss. 1991. Dairy manure management: strategies for recycling nutrients to recover fertilizer value and avoid environmental pollution. p. 1-31. Florida Coop. Ext. Serv. Univ. Florida. Available at http://edis.ifas.ufl.edu/BODY_DS096.
- van Hulzen, J.B., R. Segers, P.M. van Bodegom, and P.A. Leffelaar. 1999. Temperature effects on soil methane production: an explanation for observed variability. *Soil Biol. Biochem.* 31:1919 -1929.
- Van Soest, P. J. 1994. Nutritional Ecology of the Ruminant, Second Edition. Cornell University Press.
- Varel, V.H., J.E. Wells, E.D. Berry, and D.N. Miller. 2010. Manure odor potential and *Escheria coli* concentrations in manure slurries of feedlot steers fed 40% corn wet distillers grains. *J. Environ. Qual.* 39:1498.
- Waldrip, H.M., R.W. Todd, and N.A. Cole. 2012. Characterization of ammonium sorption by beef cattle feedyard manure. *Trans. ASABE* 55(4):1609-1619.
- Warneck, P. 2006. A note on the temperature dependence of Henry's Law coefficients for methanol and ethanol. *Atmos. Environ.* 40:7146 – 7151.
- Weindorf, D.C. and R. Wittie. 2003. Determining particle density in dairy manure compost. *The Texas J. of Agric. and Natural Resour.* 16:60-63.
- Weiss, W.P., H.R. Conrad, and N.R. St. Pierre. 1992. A theoretically-based model for predicting total digestible nutrient values of forages and concentrates. *Anim. Feed Sci. Tech.* 39:95-110.
- West, T. and G. Marland. 2002. A synthesis of carbon sequestration, carbon emissions, and net carbon flux in agriculture: comparing tillage practices in the United States. *Agric., Ecosys. Environ.* 91:217-232.
- Wilke, C.R. and P. Chang. 1955. Correlation of diffusion coefficients in dilute solutions. *A.I.Ch. E. J.* (1):264-270.

- Wilkerson, V.A., D.P. Casper, and D.R. Mertens. 1995. The prediction of methane production of Holstein cows by several equations. *J. Dairy Sci.* 78:2402-2414.
- Woodbury, B.L., D.N. Miller, J.A. Nienaber, and R.A. Eigenberg. 2001. Seasonal and spatial variations of denitrifying enzyme activity in feedlot soil. *Trans. Am. Soc. Agric. Eng.* 44(6):1632-1642.
- Wu M., M. Wang, and H. Huo. 2006. Fuel-Cycle Assessment of selected bioethanol production pathways in the United States ANL/ESD/06-7. Center for Transportation Research. Energy Systems Division, Argonne National Laboratory. Available at: <http://www.transportation.anl.gov/pdfs/TA/377.pdf>, Accessed 9 July, 2008.
- Wyngaard, N., C. Videla, L. Picone, E. Zamuner, and N. Maceira. 2012. Nitrogen dynamics in a feedlot soil. *J. Soil Sci. & Plant Nutr.* 12(3):563-574.
- Xiang, H.W., Y.Y. Duan and M.S. Zhu. 1997. A new three-parameter viscosity-temperature equation for saturated liquids from the triple point to the critical point. *Fluid Phase Equilibria* 135:279-286.
- Yamulki, S., S.C. Jarvis, and P. Owen. 1999. Methane emission and uptake from soils as influenced by excreta deposition from grazing animals. *J. Environ. Qual.* 28: 676 – 682.
- Yu, S., O.G. Clark, and J.J. Leonard. 2008. Estimation of vertical air flow in passively aerated compost in a cylindrical bioreactor. *Can. Biosyst. Eng.* 50(6):29-35.
- Zeeman, G. 1994. Methane production/emission in storages for animal manure. *Fert. Res.* 37:207-211.
- Zeikus, J.G., and M.R. Winfrey. 1976. Temperature limitation of methanogenesis in aquatic sediments. *Appl. Environ. Microbiol.* 31:99 – 107.
- Zhoa, J., H.B. Manbeck, and D.J. Murphy. 2007. Hydrogen sulfide emission rates and inter contamination strengths in a fan ventilated confined-space manure storage. *Trans. ASABE* 50(6):2217-2229.
- Zwietering, M. H., J. T. de Koos, B. E. Hasenack, J. C. de Witt, and K. van't Riet. 1991. Modeling of bacterial growth as a function of temperature. *Appl. Environ. Microbio.* 57 (4): 1094 -1101.

Table 1.1. Fill and roughage factors assigned to large and small particle pools of each feed type.

	Fill Factors		Roughage Factors	
	Large Particles	Small Particles	Large Particles	Small Particles
Alfalfa hay and silage	1.35	0.4	1.0	0.6
Grass hay and silage	1.50	0.8	1.0	0.8
Pasture	1.40	0.5	1.0	0.7
Corn silage	1.45	0.4	1.0	0.7
Small grain silage	1.55	0.6	1.0	0.8
Grain and concentrates	---	0.4	---	0.4

Table 2.1. Functions used to describe dairy cow characteristics through a 56 wk lactation cycle.

Characteristics	Animal Type	Function
Milk Yield, kg/d	Primiparous cows	$MY_1(w^{0.178})(e^{-0.021w})$
	Multiparous cows	$MY_2(w^{0.2218})(e^{-0.034w})$
Milk Fat, %	Primiparous cows or	$MF(w^{-0.24})(e^{0.016w})$
	Multiparous cows	
Body weight, kg	Primiparous cows	$BW_1(w+1.71)^{-0.0730} [e^{0.00869(w+1.71)}]$
	Multiparous cows	$BW_2(w+1.57)^{-0.0803} [e^{0.00720(w+1.71)}]$
Fiber ingestive capacity $FU/(kg \text{ of } BW)/d$	Primiparous cows	$FIC_1(w+0.857)^{0.360} [e^{-0.0186(w+0.857)}]$
	Multiparous cows	$FIC_2(w+3.000)^{0.588} [e^{-0.0277(w+3.00)}]$

¹MY = milk yield parameter, MF = milk fat content parameter, BW = body weight parameter,

FIC = fiber ingestive capacity parameter, w = week in the lactation cycle, 1 to 56, and FU = fill units.

Table 2.2. Constraints and associated equations used to develop animal rations.

Constraint Equations

Physical fill	$\sum x_i (FU_i)$	$\leq FIC_j (BW_j)$
Effective fiber	$\sum x_i (RU_i - 0.21)$	≥ 0
Energy requirement	$\sum x_i (NE_i)$	$= [NED_j + 0.7 (ECP_j)] AMM_j$
Rumen degradable protein	$\sum x_i (CP_i) (RPD_i + 0.15)$	$\geq MCP_j / 0.9$
Rumen undegradable protein	$\sum x_i 0.87 (AUP_i)$	$\geq MPR_j - 0.64 (MCP_j)$

Associated Equations

Adjustment for multiple of maintenance	$AMM_j = 0.92 / [1 - 0.04 (NER_j / NEM_j - 1)]$
Available undegraded protein	$AUP_i = CP_i [1 - RPD_i - UF_i (ADIP_i)]$
Microbial crude protein	$MCP_j = 0.13 (TDND_j) (DMI_j)$
Excess protein	$ECP_j = \sum x_i (CP_i) [RPD_i + 0.15 + 0.87 (1 - RPD_i - UF_i (ADIP_i))] - 0.7 MPR_j + 0.47 (MCP_j)$

$ADIP_i$ = acid detergent insoluble protein concentration in feed i (fraction of CP)

AMM_j = adjustment factor for multiple of maintenance in lactating animal group j

AUP_i = available RUP in feed i, fraction of DM

BW_j = body weight of animal group j, kg

CP_i = CP concentration in feed i, fraction of DM

RPD_i = rumen degradability of protein in feed i, fraction of CP

DMI = DMI estimate which resolves NEm intake with NEm and NEg requirements, kg/d

ECP_j = excess protein consumption, kg/d

FIC_j = fiber ingestive capacity, kg NDF/kg SBW/d

FU_i = fill units (NDF adjusted for particle size and digestibility; [Rotz et al., 1999a](#)) of feed i, fraction of DM

MCP_j = microbial crude protein production in animal group j, kg/d

MPR_j = metabolizable protein requirement of animal group j, kg/d

NE_i = NEm concentration in feed i, MCal/kg DM

$NEMD$ = diet NEm which resolves NEm intake with NEm and NEg requirements, MCal/kg DM

NEM_j = net energy requirement for maintenance of animal group j, MCal

NER_j = net energy requirement of animal group j, MCal

RU_i = roughage units (NDF adjusted for particle size and digestibility; [Rotz et al., 1999a](#)) of feed i, fraction of DM

$TDND_j$ = total digestible nutrient concentration of the diet, fraction of DM

UF_i = unavailable fraction of ADIP (0.7 for forages and 0.4 for concentrates).

x_i = amount of feed i in the diet, kg DM/d

$1\sum$ means the summation over all feeds in the ration

Table 3.1. Major equations used to model a compost windrow or manure stack.

Equation	No.
$K_{hc} = \frac{e^{-1752(WB)^6 + 5884(WB)^5 - 8098(WB)^4 + 5864(WB)^3 - 2380(WB)^2 + 540(WB) - 61}}{24 \times 3600 \times 100}$	3.10
$K_{g,w} = (0.00684e^{0.08794WS_{gr}})S_c^{-0.67}$	3.11
$RH = \min \left[\begin{array}{l} 100.0, 95.13 - 1.62T_{avg} - 0.51T_{max} + 2.07T_{min} + 0.33P_{rain} \\ -0.82WS - 0.49SR - 0.41D_{norrain} \end{array} \right]$	3.12
$E_{aer} = (MC_{aer,out} - MC_{aer,in})V_{aer}$	3.13
$H_g = h_c C_{CO_2} A_{eq}$	3.14
$H_{evap} = h_{fg} E_{tot}$	3.15
$H_{conv} = \frac{V_{aer} \rho_{aer} [(c_w \{w_{out} T_{out} - w_{in} T_{in}\}) + (c_a \{T_{out} - T_{in}\})]}{1000}$	3.16
$H_{cond} = \frac{k_w (T_2 - T_3) A_{w,2}}{L_{cond}}$	3.17
$V_{aer} = A_w PO_{air} K_p \left(\frac{\rho_{aer}}{\mu_{aer}} \right) g \left(1 - \frac{T_{w,l-1}}{T_{w,l}} \right) \times 3600 \times 24 \quad \& \ l=2 \text{ to } 3, T_{w,1} = T_{air}$	3.18
$C_{decomp} = (C_{man} + C_{drymat}) K_{decomp} F_{m,decomp} F_{anaerob}$	3.19
$K_{decomp} = (K_{d,max} - K_{d,slow}) e^{[k_{decay}(t-\tau)]} + K_{d,slow}$	3.20
$K_{d,slow}, K_{d,max} = x_1 (1.066^{(T_w-10)} - 1.21^{(T_w-50)})$	3.21
$EF_{d,N} = F_{d,NO_3} F_{d,O_2}$	3.22
$J_{NH_3,aer} = \left(\frac{V_{aer}}{24} \right) \left(\frac{C_{NH_3,out} - C_{NH_3,in}}{H} \right)$	3.23
$J_{NH_3,tunn} = V_{FAS} \left(\frac{C_{NH_3}}{H} \right)$	3.24
$J_{CH_4,ferm} = K_{CH_4} C_{CO_2} F_{t,ferm}$	3.25
$J_{CH_4,oxid} = C_{CH_4} F_{m,CH_4} F_{t,oxid} F_{anaerob} (1 - F_{vel})$	3.26
$\rho_p = \frac{(1370 \times (M_{mo} + M_{mi} + M_{dm})) + (2,300 \times M_{cm})}{(M_{mo} + M_{mi} + M_{dm} + M_{cm})}$	3.27

Term	Definition
A_{eq}	= area based on the equivalent soil profile (m^2)
A_{wi}	= area of contact between outer and inner windrows based on the windrow profile (m^2)
c_a	= specific heat capacity of dry air ($1.006 \text{ kJ/kg dry air per } ^\circ\text{C}$)
c_w	= specific heat capacity of water ($4.18 \text{ kJ/kg H}_2\text{O per } ^\circ\text{C}$)
C_{decomp}	= amount of organic C that can be composted within the day (kg C/d)
C_{drymat}	= available dry material organic C (kg C)
C_{man}	= available manure organic C (kg C)
C_{CO_2}	= amount of C respired (kg C/d)
C_{CH_4}	= amount of CH_4 available (kg C/d)
C_{NH_3}	= NH_3 concentration in aqueous phase for simulated layer (kg/m)
$C_{NH_3, in}, C_{NH_3, out}$	= NH_3 concentration in aqueous phase for adjacent inner and outer layers, respectively (kg/m)
$D_{no rain}$	= number of preceding consecutive days without rain (d)
E_{aer}	= potential evaporation rate due to aeration ($\text{kg H}_2\text{O/d}$)
E_{et}	= total evaporation rate ($\text{kg H}_2\text{O/d}$)
EF_{dN}	= total denitrification N loss per unit mass of windrow ($\mu\text{g N/g soil per d}$)
$F_{anaerob}$	= effect of presence of anaerobic conditions on microbial decomposition (dimensionless, 0.0 to 1.0)
F_{dNO_3}	= total denitrification N loss as a function of nitrate concentration ($\mu\text{g N/g soil per d}$)
F_{dO_2}	= effect of oxygen on denitrification (dimensionless, 0.0 to 1.0)
F_{mCH_4}	= effect of moisture on CH_4 oxidation (dimensionless, 0.0 to 1.0)
$F_{mdecomp}$	= effect of moisture on microbial decomposition (dimensionless, 0.0 to 1.0)
$F_{t/tem}$	= effect of temperature on CH_4 production (dimensionless, 0.0 to 1.0)
$F_{t/vel}$	= effect of temperature on CH_4 oxidation (dimensionless, 0.0 to 1.0)
F_{vel}	= effect of velocity on CH_4 oxidation (dimensionless, 0.0 to 1.0)
g	= acceleration due to gravity (9.8 m/s^2)
h_c	= C oxidation specific heating value (20 MJ/kg C)
h_{fg}	= latent heat of evaporation ($237 \text{ MJ/kg H}_2\text{O}$)
H	= Henry's law constant (dimensionless)
H_{conv}	= heat loss through convection (MJ)
H_{evap}	= heat loss through evaporation (MJ)
H_g	= heat generated through microbial activity (MJ)
$J_{CH_4, form}$	= daily production rate of CH_4 due to fermentation (kg C/d)
$J_{CH_4, oxid}$	= daily oxidation rate of CH_4 (kg C/d)
$J_{NH_3, aer}$	= hourly NH_3 emission rate due to aeration (kg N/h)
$J_{NH_3, turn}$	= hourly NH_3 emission rate due to turning (kg N/d)
k_{decay}	= first-order decaying coefficient (per d)
k_w	= windrow thermal conductivity ($\text{MJ/h/m per } ^\circ\text{C}$)
K_{CH_4}	= maximum fraction of $\text{CO}_2\text{-C}$ that can be converted to $\text{CH}_4\text{-C}$ within a day (per d)
$K_{d, max}$	= maximum microbial decomposition rate (per d)
$K_{d, slow}$	= microbial decomposition rate for slowly decomposing components (per d)
$K_{d, decomp}$	= effective microbial decomposition rate (per d)
K_{gw}	= water mass transfer coefficient in gas phase (m/s)
K_{hc}	= cattle manure hydraulic conductivity (m/s)
K_p	= compost permeability (m^2)
L_{cond}	= average distance for conduction between outer and inner windrows (0.81 m)
M_{cm}	= amount of composted windrow material (kg)
M_{dm}	= amount of raw dry material (kg)
M_{mi}	= amount of raw manure inorganic matter (kg)
M_{mo}	= amount of raw manure organic matter (kg)
$MC_{aer, in}, MC_{aer, out}$	= moisture concentration of incoming and outgoing air flows, respectively ($\text{kg H}_2\text{O/m}^3 \text{ dry air}$)
P_{rain}	= amount of daily precipitation (mm)
RH	= ambient air relative humidity (%)
S_c	= Schmidt number (dimensionless)
SR	= daily solar radiation (MJ/m^2)
t	= days from the start of composting or last turning (per d)
$T_{air}, T_{air, 2}$	= daily average ambient air temperature (K)
T_{in}, T_{out}	= initial and final temperatures for air flowing through the windrow layer, respectively ($^\circ\text{C}$)
T_{max}	= daily maximum ambient air temperature (K)
T_{min}	= daily minimum ambient air temperature (K)
T_w	= temperature of the layer simulated ($^\circ\text{C}$); set to 60°C in computing the maximum microbial decomposition
T_o, T_i	= temperatures of outer and inner windrows, respectively ($^\circ\text{C}$)
V_{aer}	= daily total aeration volumetric flowrate (m^3/d)
V_{FAS}	= volume of air-filled pores (m^3)
W_{in}, W_{out}	= initial and final humidity ratios for air flowing through the windrow, respectively ($\text{kg H}_2\text{O/kg dry air}$)
WB	= moisture content, wet-based for layer simulated (fraction, 0.0 to 1.0)
WS	= daily average air velocity at 10-m height (m/s)
WS_{ef}	= effective air velocity at 10-m height (m/s)
x_i	= effectiveness of the microbial decomposition rate (dimensionless)
ρ_{aer}	= density of air flowing through the windrow (kg/m^3)
ρ_{dm}	= density of dry material (kg/m^3)
ρ_{dr}	= windrow dry bulk density (kg/m^3)
ρ_m	= density of manure organic and inorganic contents (kg/m^3)
ρ_p	= effective particle density of windrow material (kg/m^3)
μ_{aer}	= air viscosity ($\text{kg/m}^2\text{s}$)
τ	= lag time before reaching maximum decomposition (per d)

Table 3.2. Simulation settings for the different organic carbon (C) compounds in cattle manure and bedding material: molecular formula, initial percentages, and corresponding organic hydrogen (H) and oxygen (O) losses.

Component	Percentage in total organic C		Organic C compound	Molecular formula	Initial percentage in the component ^[b]		H, O losses during decomposition (%)	
	Manure	Bedding ^[a]			Manure	Bedding	Thermophilic ($\geq 40^{\circ}\text{C}$)	Mesophilic ($< 40^{\circ}\text{C}$)
Non-lignin	86%	-	Sugar	$\text{C}_6\text{H}_{12}\text{O}_6$	2%	0%	87%, 95%	78%, 92%
			Starch	$\text{C}_6\text{H}_{10}\text{O}_5$	2%	0%	84%, 94%	74%, 90%
			Protein	$\text{C}_6\text{H}_{13}\text{O}_2\text{N}_{1.5}$ ^[c]	28%	5%	5%, 0% ^[d]	5%, 0% ^[d]
			Hemicellulose	$\text{C}_5\text{H}_8\text{O}_4$	24%	37.5%	83%, 94%	73%, 90%
			Cellulose	$\text{C}_6\text{H}_{10}\text{O}_5$	44%	57.5%	84%, 94%	74%, 90%
Lignin	14%	-	Lignin	$\text{C}_{11}\text{H}_{14}\text{O}_4$	100%	100%	78%, 86%	65%, 78%

^[a] Percentages of non-lignin and lignin components for bedding are based on the type of bedding selected.

^[b] Values based on [Liao et al. \(2007\)](#).

^[c] Molecular formula for protein based on amino acid Leucine ($\text{C}_6\text{H}_{13}\text{O}_2\text{N}$), with N adjusted to meet the assumed manure C/N of 15.

^[d] The H and O percentage losses for protein based on assumption that 25% of its N is not consumed during microbial decomposition.

Table 4.1. Properties of different bedding materials for bedded pack barns.

Property	Unit	Manure solids	Sand	Sawdust	Straw	Chopped straw
Absorbance capacity ^[a]	kg H_2O /kg	4.22	0.27	2.63	2.85	2.85
Cation exchange capacity ^[a]	cmol _c /kg	16.0	0.3	3.8	9.7	9.7
C/N ratio ^[a]	-	12	<i>no nitrogen</i> ^[b]	500	105	105
N content ^[a]	kg N/kg	0.033	0	0.0011	0.004	0.004
Density ^[a]	g/cm ³	0.09	1.35	0.07	0.04	0.11 ^[c]
Lignin content ^[d]	kg lignin/kg	0.14	0	0.40 ^[e]	0.12	0.12

^[a] Values from [Misselbrook and Powell \(2005\)](#).

^[b] For computation purposes, set to 1×10^6 in the simulation.

^[c] Density for chopped straw from [Bickert et al. \(2000\)](#).

^[d] Based on lignin contents used in simulating croplands and open lots.

^[e] Setting maximized based on ranges reported by [Spiehs et al. \(2014\)](#) and [Changirath et al. \(2011\)](#).

Table 6.1. Published and assigned emission rates of CO₂ emitted from uncovered slurry storages.

Reference	Emission rate [kg CO ₂ /m ³ -day]
Jungbluth et al. (2001)	0.036
Sneath et al. (2006)	0.041
Assigned	0.04

Table 6.2. Relationships used to model starch and ADF contents of feeds.

Feed type	Starch ^[a] [fraction]	ADF [fraction]
Alfalfa hay	$0.64*(1-F_{\text{NDF}}-F_{\text{CP}}-0.11)$	$0.78*F_{\text{NDF}}$
Alfalfa silage	$0.89*(1-F_{\text{NDF}}-F_{\text{CP}}-0.12)$	$0.82*F_{\text{NDF}}$
Grass hay	$0.45*(1-F_{\text{NDF}}-F_{\text{CP}}-0.11)$	$0.61*F_{\text{NDF}}$
Grass silage	$0.65*(1-F_{\text{NDF}}-F_{\text{CP}}-0.12)$	$0.64*F_{\text{NDF}}$
Corn grain	0.68	0.036
High moisture corn	0.52	0.004
Corn silage	$0.80*(1-F_{\text{NDF}}-F_{\text{CP}}-0.07)$	$0.62*F_{\text{NDF}}$
Perennial grass/legume	$0.48*(1-F_{\text{NDF}}-F_{\text{CP}}-0.14)$	$0.72*F_{\text{NDF}}$
Alfalfa pasture	$0.48*(1-F_{\text{NDF}}-F_{\text{CP}}-0.14)$	$0.55*F_{\text{NDF}}$
Protein supplements	0.0	0.0
Fat additive	0.0	0.0

^[a] The last value in the equations developed to predict starch content represents an average total of fat plus ash contents for the given feed. Typical values for fat and ash were obtained from NRC (2001).

Table 6.3. Parameters and values for the manure storage emissions model of [Sommer et al. \(2004\)](#).

Parameter	Variable	Value	Units
Volatile solids content ^[a]	P _{VS}	0.726, 0.698, 0.68 ^[b]	g VS /g TS
Achievable CH ₄ ^[c]	B ₀	0.2	g CH ₄ /g VS
Potential CH ₄ ^[c]	E _{CH₄,pot}	0.48	g CH ₄ /g VS
Correcting factors ^[c]	b ₁ , b ₂	1.0, 0.01	dimensionless
Arrhenius parameter ^[c]	ln(A)	43.33	dimensionless
Activation energy ^[c]	E	112,700	J /mol
Gas constant ^[c]	R	8.314	J /K-mol

^[a] From [USDA-SCS \(1999\)](#).

^[b] Values for heifers, dry cows, and lactating cows, respectively.

^[c] From [Sommer et al. \(2004\)](#).

Table 6.4. Published and assigned emission rates of CH₄ emitted from feces directly deposited by animals on pasture lands.

Reference	Emission rate [g CH ₄ / kg feces]
Jarvis et al. (1995)	0.110
Flessa et al. (1996)	0.130
Holter (1997)	0.068
Yamulki et al. (1999)	0.036
Assigned	0.086

Table 7.1. Initial VOC concentrations (mg/kg, dry matter basis) used in the model, based on a compilation of literature data. Values in bold are estimates based on measurements in other feeds, and are approximate at best.

Group	Corn silage	Small grain silage	Alfalfa silage	Grass silage	High-moisture corn
Acids	22	27	28	38	5
Alcohols	9.7	2.9	3.0	5.6	2
Esters	1.9	0.5	0.5	0.04	0.5
Aldehydes	0.58	0.5	0.020	0.43	0.1

Table 7.2. Equal Benefit Incremental Reactivity (EBIR) values used to aggregate emissions ([Carter, 2009](#)).

Group	Reference compound	EBIR (g/g)
Acids	Acetic acid	0.20
Alcohols	Ethanol	0.57
Esters	Ethyl acetate	0.24
Aldehydes	Acetaldehyde	1.61

Table 7.3. Geometric mean concentrations of VOCs present in fresh and incubated manure. See [Figure 7.1](#) for information on variability and the number of studies identifying each compound.

Group	Compound	CAS no.	Concentration(mg/kg DM)	
			Initial	Incubation
Acids	Acetic acid	64-19-7	12300	27700
	Propionic acid	79-09-4	6820	11800
	Butyric acid	107-92-6	2730	4300
	Isobutyric acid	79-31-2	1140	1440
	Lactic acid	50-21-5	756	9480
	Valeric acid	109-52-4	519	867
	Hexanoic acid	142-62-1	445	463
	Isovaleric acid	503-74-2	334	423
	Isohexanoic acid	646-07-1	29.9	28.9
	Heptonoic acid	111-14-8	10.2	10.7
	Octanoic acid	124-07-2	1.81	1.81
Alcohols	Ethanol	64-17-5	117	1440
	Propanol	71-23-8	20.9	71.3
	Butanol	71-36-3	10.6	36.2
	Methanol	67-56-1	1	514
	Isobutanol	78-83-1	12.3	13.3
Aromatics	Phenyl acetic acid	103-82-2	1230	
	Benzoic acid	65-85-0	1860	1320
	Phenyl propionic acid	501-52-0	213	
	Cresol	1319-77-3	117	119
	Skatole	83-34-1	8.46	2.98
	Indole	120-72-9	10.2	4.87
	4-ethylphenol	123-07-9	9.5	4.5
	Phenol	108-95-2	15.6	23.8

Table 7.4. Volatile organic compounds measured in cattle manure and their volatility and reactivity.

Group	Compound	Cas no.	Log 10 Henrys	Incremental reactivity‡	
			law constant (g:aq)*	Maximum (MIR)	Equal benefit (EBIR)
Acids	Acetic acid	64-19-7	-7.33	0.66	0.203
	Propionic acid	79-09-4	-7.13	1.17	0.342
	Butyric acid	107-92-6	-6.86	1.75	0.548
	Isobutyric acid	79-31-2	-7.07	1.15	0.376
	Lactic acid	50-21-5	-9.26		
	Valeric acid	109-52-4	-6.62	2.3§	0.702§
	Hexanoic acid	142-62-1	-6.66	2.86§	0.87§
	Isovaleric acid	503-74-2	-6.58	2.3§	0.702§
	Isohexanoic acid	646-07-1	-6.36	2.86§	0.87§
	Heptanoic acid	111-14-8	-6.35	3.42§	1.04§
	Octanoic acid	124-07-2	-6.18	3.98§	1.21§
Alcohols	Ethanol	64-17-5	-3.67	1.45	0.571
	Propanol	71-23-8	-3.54	2.38	0.792
	Butanol	71-36-3	-3.47	2.76	0.882
	Methanol	67-56-1	-3.74	0.65	0.197
	Isobutanol	78-83-1	-3.36	2.41	0.723
Aromatics	Phenyl acetic acid	103-82-2	-8.45	3.35§	-0.676§
	Benzoic acid	65-85-0	-8.46	2.75§	-0.845§
	Phenyl propionic acid	501-52-0	-8.49	3.86§	-0.537§
	Cresol	1319-77-3	-4.4	2.34	-0.765
	Skatole	83-34-1	-4.2	3.66§	0.999§
	Indole	120-72-9	-4.33	3.66§	0.999§
	4-ethylphenol	123-07-9	-4.44	2.95§	-0.746§
	Phenol	108-95-2	-4.67	2.69	-0.879

*From NIST (measured) or ChemSpider (predicted from structure). For all acids, value was adjusted downward to reflect the fraction of the compound in the free form at pH 6.5.

‡From [Carter \(2009\)](#)

§Estimated value, based on extrapolation from smaller analogous compounds, addition of values for smaller compounds, or substitution of the value for a similar compound.

Table 7.5. Parameter values for the manure VOC emission model.

Group	Representative compound	<i>pKa</i>	Henry's law constant (g:aq)		Reactivity (g/g)		Concentrations (g/kg dry matter)	
			<i>a</i>	<i>b</i>	MIR	EBIR	Initial conc.	Storage conc.
C2 & C3 acids	Acetic acid	4.83	3.652	2596	0.90†	0.27†	20	30
C4 and larger acids	Butyric acid	4.84	-4.673	0	1.5†	0.46†	5.0	20
Alcohols	Ethanol	---	5.576	2757	1.45	0.57	0.2	2.0
Aromatic acids	Phenylacetic	4.31	-5.76	0	3.35‡	0	3.0	3.0
Aromatics	Indole	---	-4.33	0	3.0†	0†	0.2	0.2

*Dimensionless constant (g:aq) is calculated by: $\log H = a - b / T$, where T = temperature, K

†Composite value

‡An estimate based on addition of values for individual compounds

Table 8.1. Use factors for major resource inputs in feed production.

Feed type	Fuel use liter/t DM feed ^[a]	Machine use kg/t DM feed ^[b]	Pesticide use kg ai/t DM feed ^[c]	Seed use kg/t DM feed ^[d]
Grazed forage	0.15	2.0	0.05	0.3
Alfalfa or grass silage	5.0	5.5	0.10	0.9
Alfalfa or grass hay	1.3	3.0	0.10	0.6
Corn silage	4.5	5.5	0.30	1.7
High moisture corn	1.3	3.0	0.67	4.0
Corn grain	1.3	1.5	0.67	4.0
Protein supplement	1.3	0.5	0.00	0.0
Fat additive	1.3	0.5	0.00	0.0

^[a] Liters of fuel used in the production and feeding of each feed.

^[b] Total equipment mass per unit of feed produced over the life of the equipment.

^[c] Mass of active ingredient applied per unit of each feed produced.

^[d] Mass of seed used per unit of each feed produced.

Figure 1.1. Important components, sources, and sinks considered in the emission of ammonia, hydrogen sulfide, greenhouse gases and the life cycle assessment determining the carbon footprint of cattle operations.

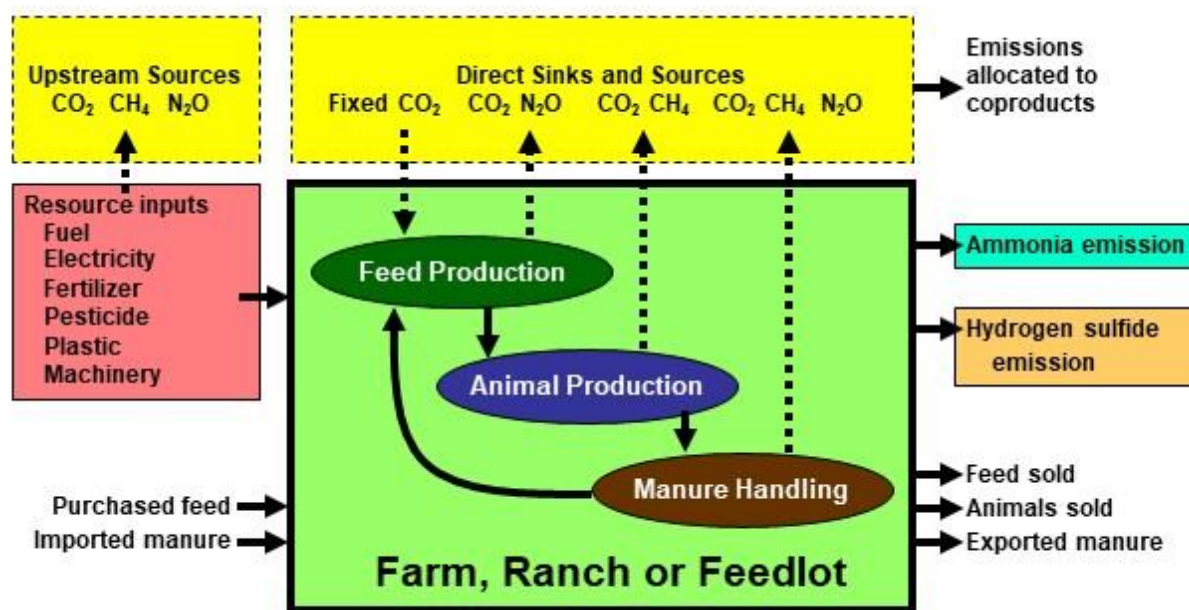


Figure 3.1. Model flow in the simulation of a compost windrow.

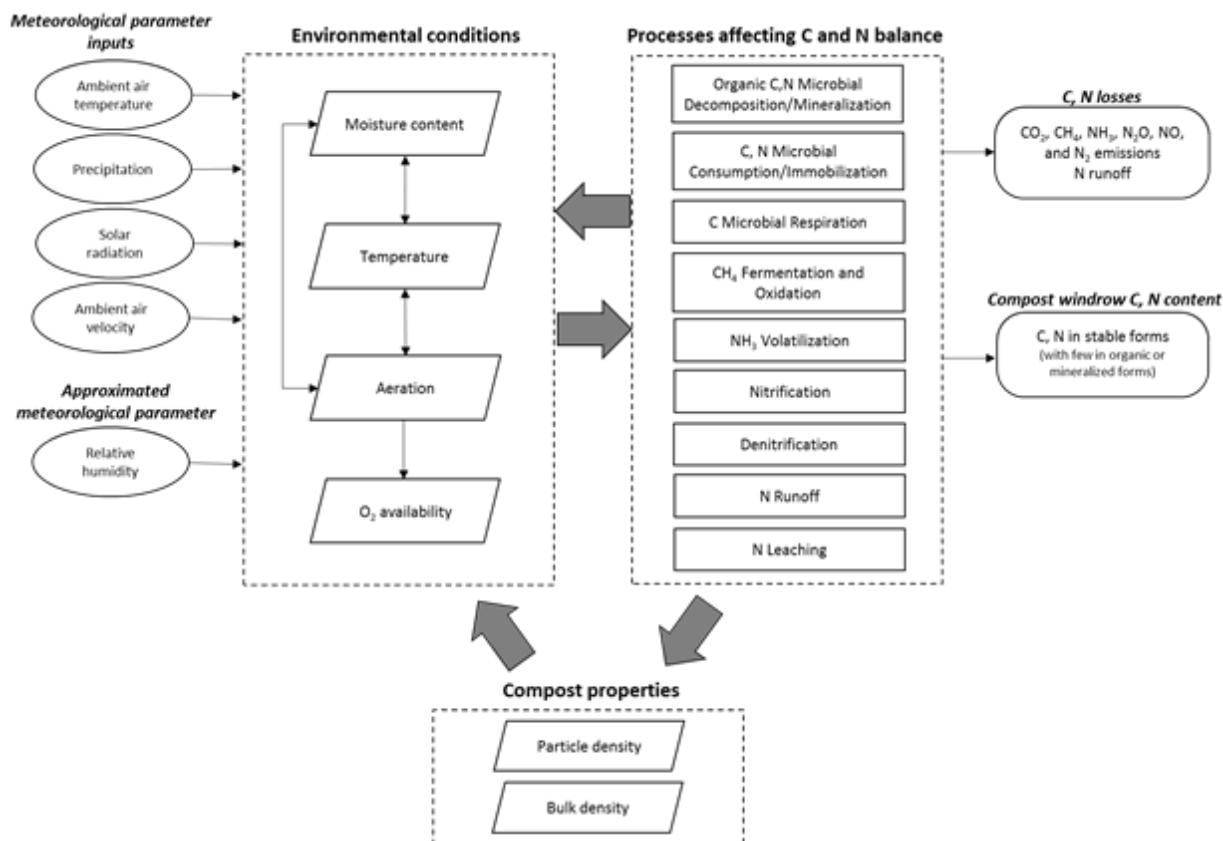


Figure 3.2. Simulation profiles used to represent a compost stack or windrow: a) windrow profile and b) equivalent soil profile.

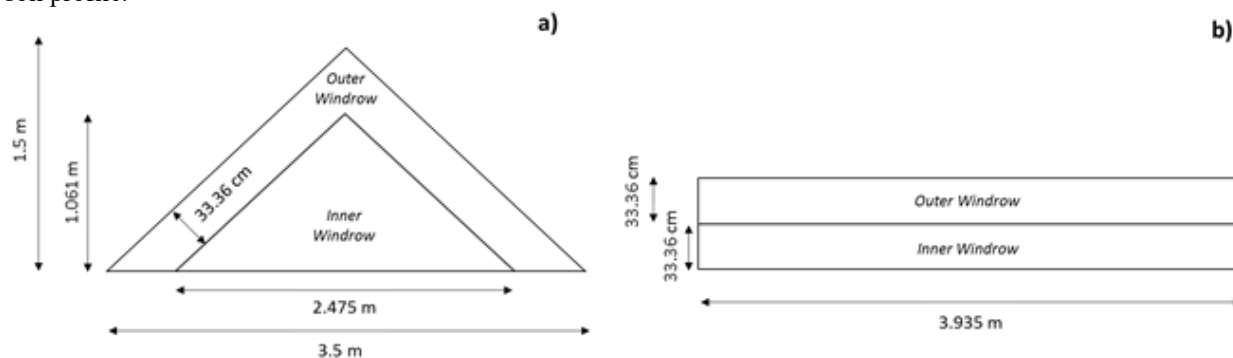


Figure 3.3. Flow of carbon (C) and nitrogen (N) through processes as simulated for compost windrows.

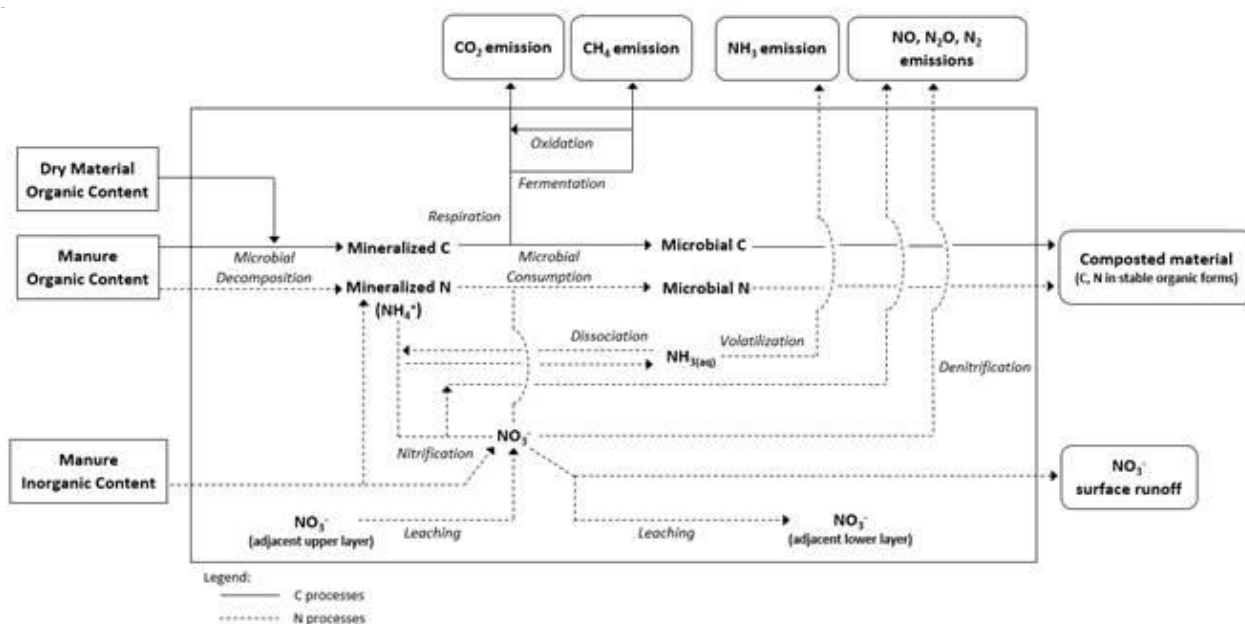


Figure 5.1. Fractions of sulfide species present in aqueous solution as a function of pH at 25°C ([Blunden and Aneja, 2008](#); [Snoeyink and Jenkins, 1980](#)).

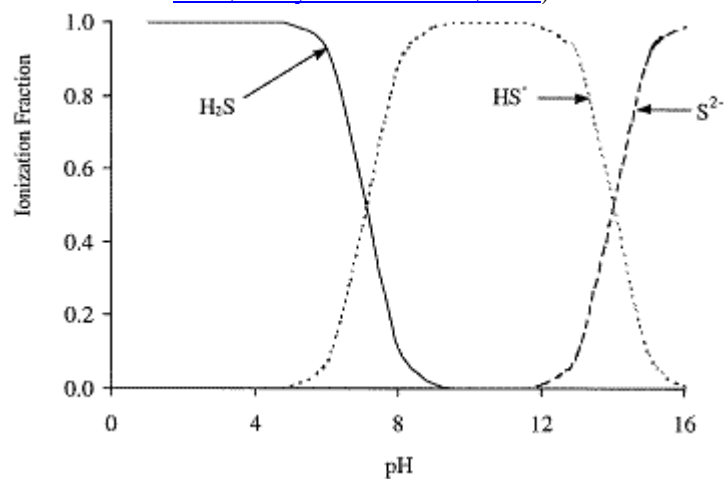


Figure 5.2. Two-layer model of a gas-liquid interface ([Blunden et al., 2008](#))

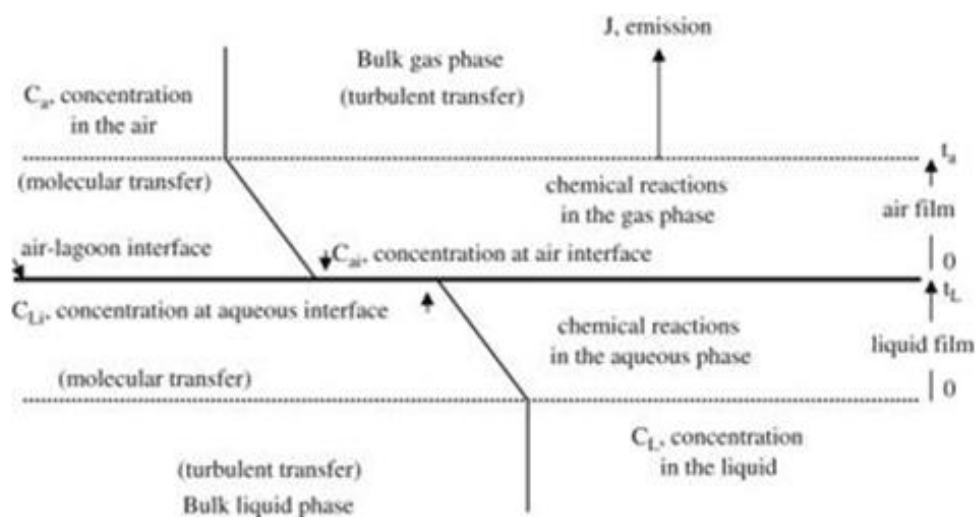


Figure 6.1. Pathway of denitrification in soils ([Parton et al., 1996](#)).

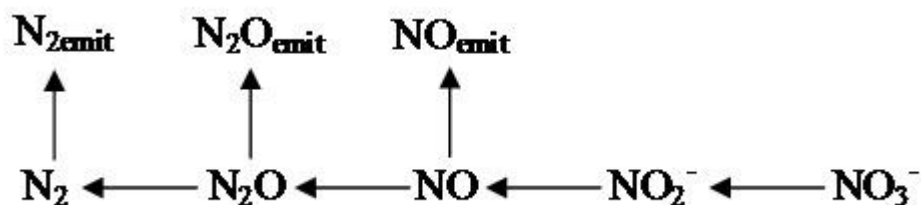


Figure 6.2. Pathway of nitrification in soils. Dashed lines and square brackets indicate incompletely understood processes and intermediates ([Parton et al., 1996](#)).

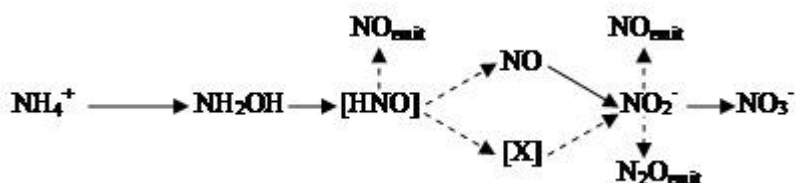


Figure 6.3. Conceptual model of controls on N gas emissions from soil using the leaky pipe metaphor ([Parton et al., 2001](#)).

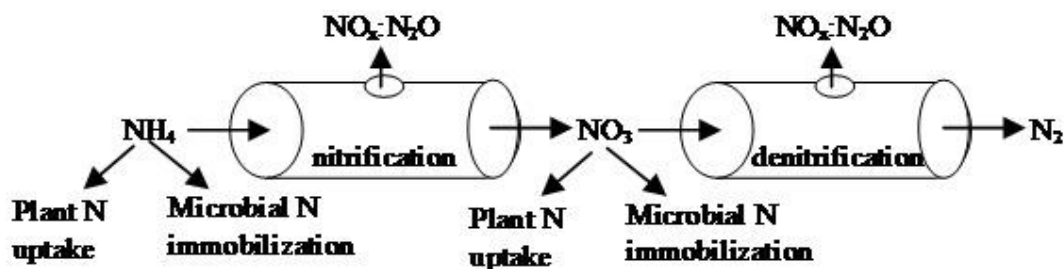


Figure 7.1. Diagram for the hourly simulation of VOC emissions from silage storage and feed lanes.

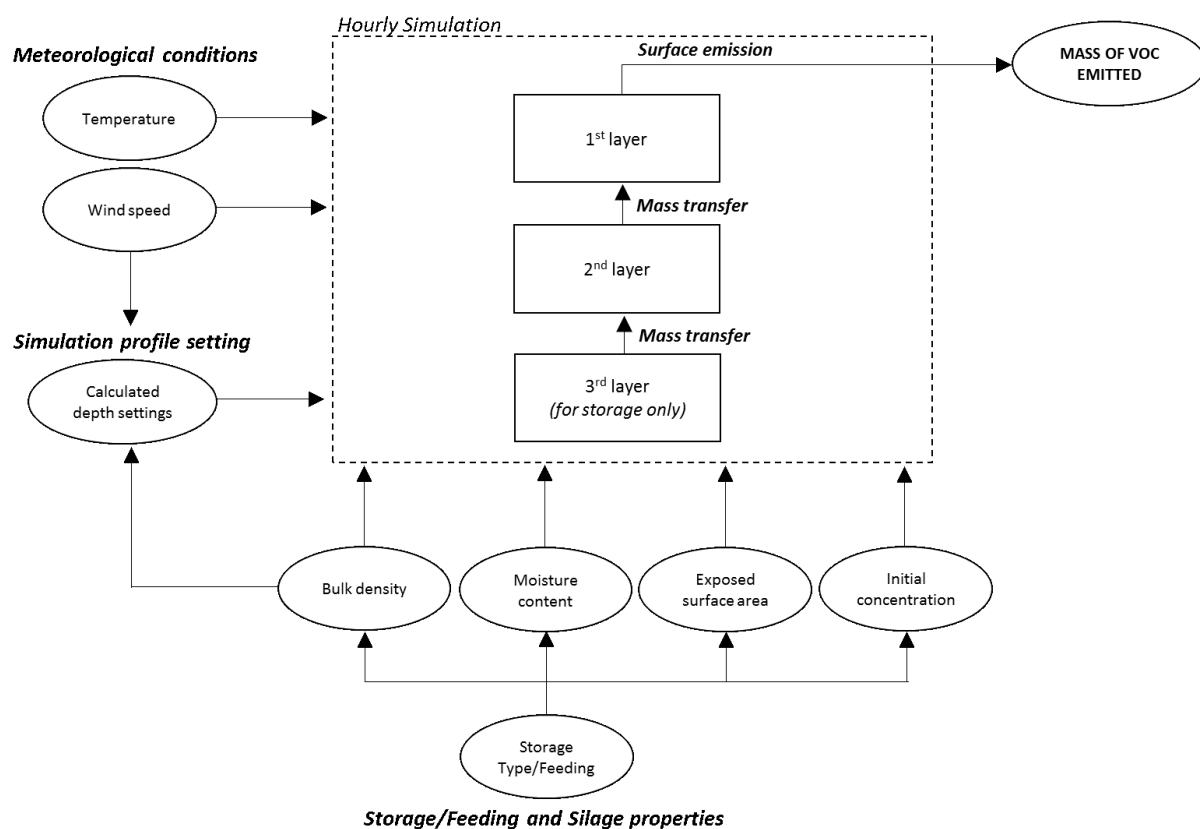


Figure 7.2. Concentrations of VOCs in cattle manure for both fresh manure (initial) and incubated manure (incubations). Points show values from individual studies (including medians, minima, and maxima), while vertical lines show overall geometric means. Numbers in parentheses show the number of studies that data came from.

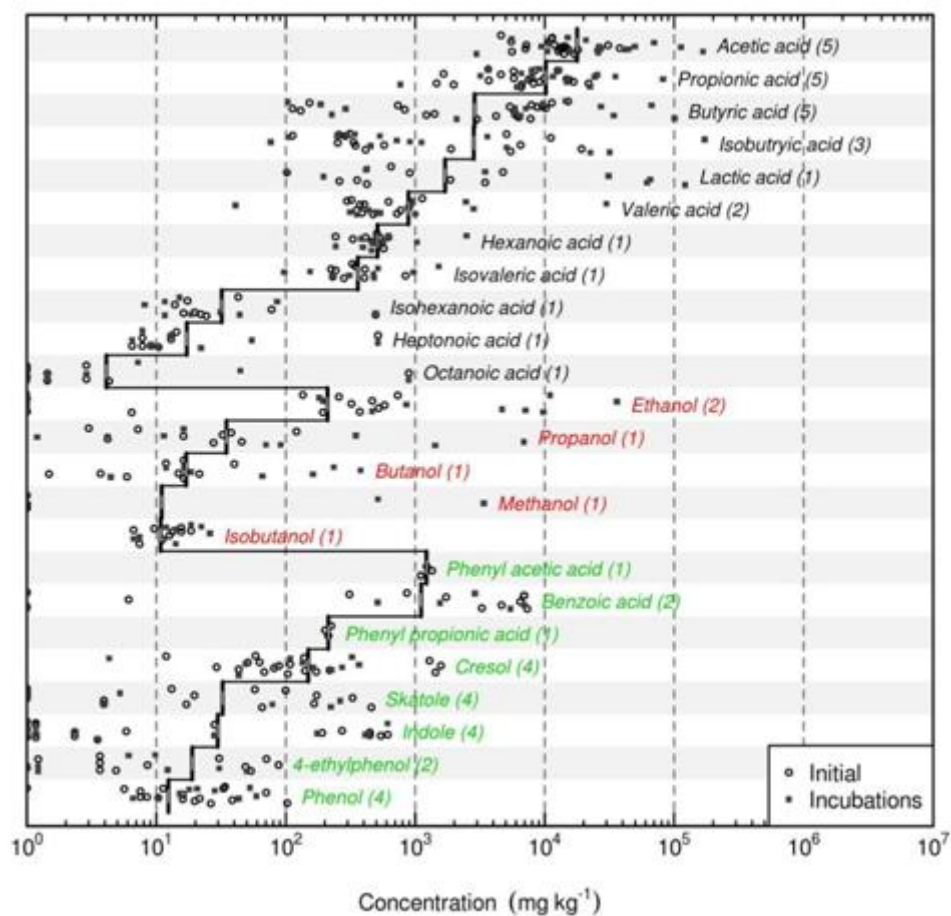


Figure 7.3. Emission potential (product of concentration and Henry's law constant) for all observations. Values are normalized to ethanol. Vertical lines show overall medians.

